



Specifications and Supplies

HL-L9410CDN

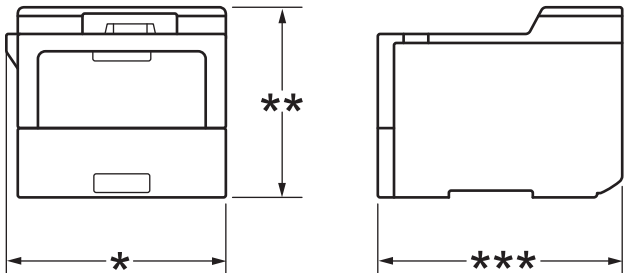
Table of Contents

Specifications	1
Supplies	7

Specifications

- >> General Specifications
- >> Print Media Specifications
- >> Printer Specifications
- >> Interface Specifications
- >> Direct Print Feature Specifications
- >> Supported Protocols and Security Features
- >> Computer Requirements Specifications

General Specifications

Printer Type		<ul style="list-style-type: none"> Laser
Print Method		<ul style="list-style-type: none"> Electrophotographic Laser Printer
Memory Capacity	Standard	<ul style="list-style-type: none"> 1 GB
Machine display		<ul style="list-style-type: none"> Liquid Crystal Display (LCD) 3.5 in. (87.6 mm) TFT Color touchscreen LCD ¹ Touchscreen 2.85 x 2.70 in. (72.5 x 68.7 mm)
Power Source		<ul style="list-style-type: none"> 110 V to 120 V AC 50/60 Hz
Power Consumption (Average)	Peak	<ul style="list-style-type: none"> Approximately 1,050 W
	Printing ²	<ul style="list-style-type: none"> Approximately 790 W at 77°F (25°C)
	Printing (Quiet Mode) ²	<ul style="list-style-type: none"> Approximately 430 W at 77°F (25°C)
	Ready ²	<ul style="list-style-type: none"> Approximately 90 W at 77°F (25°C)
	Sleep ²	<ul style="list-style-type: none"> Approximately 18.4 W
	Deep Sleep ²	<ul style="list-style-type: none"> Approximately 1 W
Power Off ^{3 4}		<ul style="list-style-type: none"> Approximately 0.02 W
Dimensions (Typical outline view) 		Unit: in. (mm) <ul style="list-style-type: none"> * : 17.4 (442) ** : 15.9 (403) *** : 21.3 (541)
Weights (with supplies)		<ul style="list-style-type: none"> 63.2 lb (28.7 Kg)

Noise Level	Sound Pressure	Printing	<ul style="list-style-type: none"> • 1-sided printing LpAm = 55 dB (A) • 2-sided printing LpAm = 56.5 dB (A) 	
		Printing (Quiet Mode)	<ul style="list-style-type: none"> • 1-sided printing LpAm = 52 dB (A) • 2-sided printing LpAm = 53 dB (A) 	
		Ready	<ul style="list-style-type: none"> • LpAm = 17.2 dB(A)⁵ 	
	Sound Power	Printing ⁶	Monochrome	<ul style="list-style-type: none"> • LWAd = 6.87 B (A)
			Color	<ul style="list-style-type: none"> • LWAd = 6.88 B (A)
		Printing (Quiet Mode)	Monochrome	<ul style="list-style-type: none"> • 1-sided printing LWAd = 6.37 B (A) • 2-sided printing LWAd = 6.68 B (A)
			Color	<ul style="list-style-type: none"> • 1-sided printing LWAd = 6.37 B (A) • 2-sided printing LWAd = 6.68 B (A)
	Ready	<ul style="list-style-type: none"> • LWAd = 3.02B (A) 		
Temperature	Operating		<ul style="list-style-type: none"> • From 50°F to 90°F (10°C to 32°C) 	
	Storage		<ul style="list-style-type: none"> • From 32°F to 104°F (0°C to 40°C) 	
Humidity	Operating		<ul style="list-style-type: none"> • 20% to 80% (without condensation) 	
	Storage		<ul style="list-style-type: none"> • 10% to 90% (without condensation) 	

1 Measured diagonally.

2 Measured when the machine is connected to the USB interface.

3 Measured according to IEC 62301 Edition 2.0.

4 Power consumption varies slightly depending on the usage environment.

5 If the fan motor is on: LpAm = 17.2 dB(A)

6 Measured in accordance with ISO 7779.

Print Media Specifications

Paper Input	Paper Tray (Standard)	Paper Type	<ul style="list-style-type: none"> • Plain Paper, Letterhead, Colored Paper, Thin Paper, Recycled Paper, Thick Paper, Thicker Paper
		Paper Size	<ul style="list-style-type: none"> • A4, Letter, B5 (JIS), B5 (ISO), A5, A5 (Long Edge), B6 (JIS), A6, Executive, Legal, Mexico Legal, India Legal, Folio, 16K (195x270 mm), A4 Short (270mm Paper)
		Paper Weight	<ul style="list-style-type: none"> • 16 to 61 lb (60 to 230 g/m²)
		Maximum Paper Capacity	<ul style="list-style-type: none"> • Up to 520 sheets of 20 lb (80 g/m²) Plain Paper
	Multi-purpose tray (MP tray)	Paper Type	<ul style="list-style-type: none"> • Plain Paper, Letterhead, Colored Paper, Thin Paper, Thick Paper, Thicker Paper, Recycled Paper, Bond, Label, Envelope, Env. Thin, Env.Thick, Glossy Paper

Paper Input	Multi-purpose tray (MP tray)	Paper Size	<ul style="list-style-type: none"> Width: 3 to 8.5 in. (76.2 to 215.9 mm) Length: 5 to 14 in. (127 to 355.6 mm) Envelope: COM-10, DL, C5, Monarch
		Paper Weight	<ul style="list-style-type: none"> 16 to 61 lb (60 to 230 g/m²)
		Maximum Paper Capacity	<ul style="list-style-type: none"> Up to 100 Sheets of 20 lb (80 g/m²) Plain Paper Envelope: 15 envelopes
	Paper Tray 2, 3, 4 (Optional) ¹	Paper Type	<ul style="list-style-type: none"> Plain Paper, Letterhead, Colored Paper, Thin Paper, Recycled Paper
		Paper Size	<ul style="list-style-type: none"> A4, Letter, B5 (JIS), A5, Executive, Legal, Mexico Legal, India Legal, Folio, 16K (195x270 mm), A4 Short (270mm Paper)
		Paper Weight	<ul style="list-style-type: none"> 16 to 28 lb (60 to 105 g/m²)
		Maximum Paper Capacity	<ul style="list-style-type: none"> LT-330CL Up to 250 sheets of 20 lb (80 g/m²) Plain Paper LT-340CL Up to 500 sheets of 20 lb (80 g/m²) Plain Paper
Paper Output ²	Face Down Output Tray		<ul style="list-style-type: none"> Up to 250 Sheets of 20 lb (80 g/m²) Plain Paper (face down delivery to the face down output paper tray)
	Face Up Output Tray		<ul style="list-style-type: none"> One sheet (face up delivery to the face up output tray)
2-sided	Automatic 2-sided Printing	Paper Type	<ul style="list-style-type: none"> Plain Paper, Letterhead, Colored Paper, Thin Paper, Thick Paper, Thicker Paper, Recycled Paper, Glossy Paper
		Paper Size	Select the paper size you want to use by sliding the 2-sided lever: <ul style="list-style-type: none"> A4, A4 Short (270mm Paper) Letter, Legal, Mexico Legal, India Legal, Folio
		Paper Weight	<ul style="list-style-type: none"> 16 to 61 lb (60 to 230 g/m²)

¹ Maximum number of Lower Trays: Up to three LT-330CL Lower Trays, or two LT-340CL, or a combination of one LT-330CL and one LT-340CL.

² For labels, we recommend removing the printed sheets from the output paper tray immediately after they exit the machine to avoid the possibility of smudging.

Printer Specifications

Automatic 2-sided Print		<ul style="list-style-type: none"> Yes
Emulation		<ul style="list-style-type: none"> PCL5e, PCL5c, PCL6 (PCL XL Class3.0), BR-Script3, PDF Version 1.7, XPS Version 1.0
Resolution		<ul style="list-style-type: none"> 600 x 600 dpi, 2,400 dpi class (2400 x 600) quality
Print Speed ^{1 2}	1-sided Print ³	Monochrome
		Color
	2-sided Print	Monochrome

- Up to 42 pages/minute (Letter size)
- Up to 40 pages/minute (A4 size)

- Up to 42 pages/minute (Letter size)
- Up to 40 pages/minute (A4 size)

- Up to 29 sides/minute (Up to 14 sheets/minute) (Letter size)

Print Speed ^{1 2}	2-sided Print	Up to 28 sides/minute (Up to 14 sheets/minute) (A4 size)
		Color <ul style="list-style-type: none"> Up to 29 sides/minute (Up to 14 sheets/minute) (Letter size) Up to 28 sides/minute (Up to 14 sheets/minute) (A4 size)
First Print Time ^{4 5 6 7}		Monochrome <ul style="list-style-type: none"> Less than 10 seconds at 73.4°F (23°C) / 115 V
		Color <ul style="list-style-type: none"> Less than 10 seconds at 73.4°F (23°C) / 115 V

- The print speed may change depending on the type of document you print.
- The print speed may be slower when the machine is connected by wireless LAN.
- Measured in accordance with ISO/IEC 24734.
- Printing from Ready mode and standard tray.
- Length of time from when the machine is started until paper output is complete (except when the machine is turned on or when an error is fixed).
- May vary when calibration or registration is in progress.
- This applies when printing on A4- or Letter-size paper from the standard tray. It could be longer however, depending on the paper size and the amount of print data.

Interface Specifications

USB ^{1 2}	<ul style="list-style-type: none"> Hi-Speed USB 2.0 Use a USB 2.0 interface cable that is no more than 6 feet (2 meters) long.
LAN	<ul style="list-style-type: none"> 10Base-T/100Base-TX/1000Base-T ³
Wireless LAN ⁴	<ul style="list-style-type: none"> IEEE 802.11a/b/g/n (Infrastructure Mode) IEEE 802.11a/g/n (Wi-Fi Direct®)
NFC ⁵	<ul style="list-style-type: none"> Yes

- Your machine has a USB 2.0 Hi-Speed interface. The machine can also be connected to a computer that has a USB 1.1 interface.
- Third-party USB hub devices are not supported.
- Use a Category 5e (or greater) network cable.
- For certain models, the wireless network connection can be used only when the optional Wireless Module is installed.
- When you connect an external IC card reader, use a HID class driver supported device.

Direct Print Feature Specifications

Compatibility	<ul style="list-style-type: none"> PDF version 1.7, JPEG, Exif+JPEG, PRN (created by the machine's own printer driver), TIFF (scanned by Brother models), XPS version 1.0
Interface	<ul style="list-style-type: none"> USB direct interface : Front x 1, Rear x 1

Supported Protocols and Security Features

Ethernet

10Base-T/100Base-TX/1000Base-T

Wireless LAN (5 GHz)

IEEE 802.11a/n (Infrastructure Mode), IEEE 802.11a/n (Wi-Fi Direct)

Wireless LAN (2.4 GHz)

IEEE 802.11b/g/n (Infrastructure Mode), IEEE 802.11g/n (Wi-Fi Direct)

Protocols (IPv4)

ARP, RARP, BOOTP, DHCP, APIPA (Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, FTP Server, TELNET Server, HTTP/

HTTPS server, TFTP client and server, SMTP Client, SNMPv1/v2c/v3, ICMP, Web Services (Print), CIFS client, SNTP client, LDAP

Protocols (IPv6)

NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, FTP Server, TELNET Server, HTTP/HTTPS server, TFTP client and server, SMTP Client, SNMPv1/v2c/v3, ICMPv6, Web Services (Print), CIFS Client, SNTP Client, LDAP

Network Security (Wired)

SMTP-AUTH, SSL/TLS (IPPS, HTTPS, SMTP), SNMP v3, 802.1x (EAP-MD5, EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

Network Security (Wireless)

SMTP-AUTH, SSL/TLS (IPPS, HTTPS, SMTP), SNMP v3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

Wireless Network Security

WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES) (Wi-Fi Direct supports WPA2-PSK (AES) only)

Wireless Certification

Wi-Fi Certification Mark License (WPA™/WPA2™ - Enterprise, Personal), Wi-Fi Protected Setup™ (WPS) Identifier Mark License, Wi-Fi CERTIFIED™ Wi-Fi Direct

Computer Requirements Specifications

Supported Operating Systems And Software Functions

Computer Platform & Operating System Version		Computer Interface				Processor	Hard Disk Space to Install	
		Parallel (IEEE1284)	USB ¹	10Base-T/100Base-TX/1000Base-T (Ethernet)	Wireless ² 802.11a/b/g/n		For Drivers	For Applications (including Drivers)
Windows Operating System	Windows 7 SP1 / 8.1 ^{1 3}	N/A	Printing		32 bit (x86) or 64 bit (x64) processor	50 MB	1.6 GB	
	Windows 10 Home / 10 Pro / 10 Education / 10 Enterprise ¹		Printing					
	Windows Server 2008 SP2 ³		64 bit (x64) processor	Printing		50 MB		
	Windows Server 2008 R2 ³							
	Windows Server 2012							
	Windows Server 2012 R2							
	Windows Server 2016							
	Windows Server 2019							
Mac Operating System ⁴	macOS v10.14.x	Printing		64 bit (x64)	N/A	500 MB		
	macOS v10.15.x							

	macOS v11			proces sor		
--	-----------	--	--	---------------	--	--

- 1 Third-party USB ports are not supported.
- 2 For certain models, the optional Wireless Module is required.
- 3 Windows 7 / Server 2008 / Server 2008 R2 supported by Extended Security Updates until Jan 10, 2023.
- 4 macOS Disclaimer. AirPrint capable: Printing via Mac requires using AirPrint. Mac printer driver is not provided.

For the latest driver updates, go to your model's **Downloads** page at support.brother.com.





All trademarks, brand and product names are the property of their respective companies.

Supplies

When the time comes to replace supplies, such as the toner cartridge or drum unit, an error message will appear on your machine's control panel or in the Status Monitor. For more information about the supplies for your machine, visit www.brother.com/original or contact your local Brother dealer.



The Supply Order Number (No.) will vary depending on your country and region.

Supply Items	Supply Order No.	Approximate Life (Page Yield)	Applicable Models
Toner Cartridge 	Standard Toner: TN810	<ul style="list-style-type: none"> Black: Approximately 9,000 pages^{1 2} Cyan / Magenta / Yellow: Approximately 6,500 pages^{1 2} 	HL-L9410CDN
	High Yield Toner: TN810XL	<ul style="list-style-type: none"> Black: Approximately 12,000 pages^{1 2} Cyan / Magenta / Yellow: Approximately 9,000 pages^{1 2} 	HL-L9410CDN
	Starter Toner: (Supplied with your machine)	<ul style="list-style-type: none"> Black: Approximately 6,500 pages^{1 2} Cyan / Magenta / Yellow: Approximately 5,000 pages^{1 2} 	HL-L9410CDN
Drum Unit 	<ul style="list-style-type: none"> DR810CL 	<ul style="list-style-type: none"> Approximately 100,000 pages³ 	HL-L9410CDN
Belt Unit 	<ul style="list-style-type: none"> BU800CL 	<ul style="list-style-type: none"> Approximately 150,000 pages⁴ 	HL-L9410CDN
Waste Toner Box 	<ul style="list-style-type: none"> WT800CL 	<ul style="list-style-type: none"> Approximately 100,000 pages^{2 5 6} 	HL-L9410CDN

¹ The approximate cartridge yield is declared in accordance with ISO/IEC 19798.

² Letter or A4 size single-sided pages

³ Approximately 100,000 pages based on three pages per job (A4/Letter single-sided pages). The number of pages may be affected by a variety of factors including but not limited to media type and media size.

⁴ Approximately 150,000 pages based on two pages per job (A4/Letter single-sided pages). The number of pages may be affected due to a variety of factors including but not limited to media type and media size.

-
- 5 Approximate waste toner box yield is declared in accordance with ISO/IEC 19798.
 - 6 The number of pages may be affected due to a variety of factors including but not limited to media type and media size.

Brother International Corporation
200 Crossing Boulevard
P.O. Box 6911
Bridgewater, NJ 08807-0911 USA

Brother International Corporation (Canada) Ltd.
1 rue Hôtel de Ville,
Dollard-des-Ormeaux, QC, Canada H9B 3H6

brother

This machine is approved for use in the country of purchase only. Local Brother companies or their dealers will support only machines purchased in their own countries.



USA/CAN
Version 0