

brother

TZe
TAPE**HS**
TUBE

USER'S GUIDE

P-touch

E550W

In order to use your P-touch safely, read the included Quick Setup Guide first.

Read this guide before you start using your P-touch.

Keep this guide in a handy place for future reference.

Please visit us at support.brother.com where you can get product support and answers to frequently asked questions (FAQs).



www.brother.com

- 1 INTRODUCTION
- 2 EDITING A LABEL
- 3 LABEL PRINTING
- 4 USING THE FILE MEMORY
- 5 USING P-TOUCH SOFTWARE
- 6 NETWORK
- 7 RESETTING & MAINTENANCE
- 8 TROUBLESHOOTING
- 9 APPENDIX

INTRODUCTION

.....

Contents

EDITING A LABEL	4
Selecting a Labelling Application Type	4
GENERAL	4
FACEPLATE	4
CABLE WRAP	4
CABLE FLAG	5
PATCH PANEL	5
PUNCH-DOWN BLOCK	6
熱縮套管	6
Setting Cross-ID	6
Entering and Editing Text	7
Entering Text from the Keyboard	7
Switching Upper Case/Lower Case	7
Select The Input Method	7
Adding a New Line	8
Adding a New Block	8
Moving the Cursor	9
Inserting Text	9
Deleting Text	9
Entering 符號	10
Entering 符號 Using the Symbol Function	10
Entering the User-defined Character Using the Symbol Function	10
Using 常用符號儲存	11
Setting Character Attributes	12
Setting Character Attributes by Label	12
Setting Character Attributes by Each Line	12
Setting 自動縮小設定	13
Setting 外框	13
Tape Cutting Options	14
LABEL PRINTING	16
Label Preview	16
Printing a Label	16
Printing a Single Page	17
Printing a Range of Pages	17
Printing Multiple Copies	17
Attaching Labels	18
USING THE FILE MEMORY	19
Storing a Label into Memory	19
Opening a Stored Label File	19
Printing a Stored Label File	20
Deleting a Stored Label File	20
USING P-TOUCH SOFTWARE	21
Using P-touch Editor	21

Using P-touch Editor (For Windows)	21
Using P-touch Editor (For Mac)	25
Updating P-touch Editor	27
Using P-touch Transfer Manager (For Windows)	29
How to Use P-touch Transfer Manager	29
Transferring the Label Template to P-touch Transfer Manager	29
Using P-touch Transfer Manager	30
Transferring Templates or Other Data from the Computer to the P-touch	31
Backing Up Templates or Other Data Saved in the P-touch	35
Deleting All the P-touch data	36
Using the Data Transferred to the P-touch	38
A User-defined Character Image	38
Printing the 傳輸內容	38
Using Transferred Database Data	40
Deleting the Transferred Data	44
Using P-touch Library	45
Starting P-touch Library	45
Opening and Editing Templates	46
Printing Templates	46
Searching for Templates or Other Data	47

NETWORK 49

Configuring the Network Settings	49
--	----

RESETTING & MAINTENANCE 50

Resetting the P-touch	50
Resetting the Data to Factory Settings Using the P-touch Keyboard	50
Resetting the Data Using the Menu Key	50
Maintenance	51
Cleaning the Unit	51
Cleaning the Print Head	51
Cleaning the Tape Cutter	51

TROUBLESHOOTING 52

What to do when	52
Error Messages	54

APPENDIX 57

Specifications	57
符號	59
Character Attribute	61
外框	63
條碼	63
Bar Code Settings Table	63
Special Character List	64
Notes on Using P-touch Transfer Manager (For Windows)	65
Notes on Creating Templates	65
Notes on Transferring Templates	65
Notes on Transferring Data Other Than Templates	65

EDITING A LABEL

Selecting a Labelling Application Type

There are six different types of labelling applications.



GENERAL

Labels printed with this mode can be used for general purposes. In this mode you can specify the following items:

- 長度：自動，10mm-999mm
- 方向： (Horizontal), (Vertical)

When the GENERAL mode is selected, you can press the **Shift** key and then press the 段落更換 key to add a new block.

Horizontal

ABCDE

Vertical

◁▷○□▽

FACEPLATE

Labels printed with this mode can be used to identify various faceplates. Block of text is evenly spaced on a single label. In this mode, and you can specify the following items:

- 長度：50mm, 10mm-999mm
- 段落數：1, 1 - 5
- 方向： (Horizontal), (Vertical)

1 block

1A-B01

2 blocks

1A-B01 1A-B02

CABLE WRAP

Labels printed with this mode can be wrapped around a cable or wire. We recommend using 可彎曲式 Tape or Self-Laminating Tape for Cable Wrap labels.

In CABLE WRAP mode, the text is printed as shown in the illustrations. You can specify the following items:

- 單位長度：直徑 (Custom Diameter), 長度 (Custom Length), CAT5/6, CAT6A, COAX, AWG, 旋轉
- 值：Depending on UOM
- 連續標籤：開, 關
- Cross-ID: 關, 開 (See “Setting Cross-ID” on page 6)

Standard

2A-C14
2A-C14
2A-C14
2A-C14
2A-C14


旋轉

2A-C14
2A-C14
2A-C14
2A-C14

Text: Type in single or multiple lines of data.

When using 可彎曲式 Tape:

- Labels made with 可彎曲式 Tape are not designed for use as electrical insulation.
- When wrapping labels around cylindrical objects, the diameter of the object (1) should be at least 3 mm.
- The overlapping ends of the label or the label flag (2) should be at least 5 mm.




When using Self-Laminating Tape:

- The text is horizontally printed.
- When you insert the Self-Laminating Tape and select CABLE WRAP, you can specify the following items:
 - 長度：自動，15mm-300mm
 - 垂直偏移 (Adjusts Vertical Position): -7, -6, -5, -4, -3, -2, -1, 0, +1, +2, +3, +4, +5, +6, +7
 - Cross-ID: 關, 開


CABLE FLAG

Labels printed with this mode can be wrapped around a cable or wire, and both ends of the label stick together to form a flag. We recommend using 可彎曲式 Tape for Cable Flag labels. The text on Cable Flag labels is printed on both ends of the label, leaving a blank space in the middle that wraps around the cable. In this mode, you can specify the following items:



1 Flag at least 15 mm

- 旗幟標籤設計： (The same text is printed on each block.),
 (Two different texts are printed on each block.)
- 旗幟標籤長度：**30mm**, 10mm-200mm
- 纜線直徑：**6mm**, 3mm-90mm
- 方向： (Horizontal), (Vertical)
- Cross-ID: 關, 開 (See “Setting Cross-ID” on page 6)

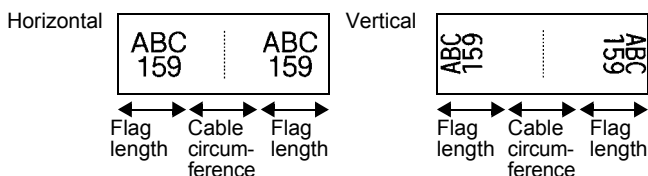


- You can enter up to two bar codes when is selected in flag layout.
- Labels made with 可彎曲式 Tape are not designed for use as electrical insulation.

PATCH PANEL

Labels printed with this mode can be used to identify various types of panels. In this mode, you can specify the following items:

- 段落長度：**15.0mm**, 5.0mm-300.0mm
- 段落數：**4**, 1-99
- 分行： (Tic), (Dash), (Line), (Bold), (Frame), (None)
- 方向： (Horizontal), (Vertical)
- 反轉： 關, 開
- 進階： 關, 開



Adjust 段落長度 independently when “進階” is set to “開”.






- 無邊： 關, 開
Set the left and right label margins to zero.

- “進階” and “無邊” cannot be set to “開” at the same time.

PUNCH-DOWN BLOCK

Labels printed with this mode can be used to identify a type of electrical connection often used in telephony. There are up to three lines for each block on a single label and you can enter three lines for each block. In this mode, you can specify the following items:

- 模組寬度：**200mm**, 50mm-300mm
- 段落類型：**4 Pairs**, 2 Pairs, 3 Pairs, 5 Pairs, 空格
- 順序類型： (None),  (Horizontal),  (Backbone)
- 初始值：---, 1 - 99999

B01	B02	B03	B04	B05	B06
B07	B08	B09	B10	B11	B12

1	4	8	12	16	20	24
25	28	32	36	40	44	48



- When “ 空格 ” is selected in “ 段落類型 ”, “ 順序類型 ” is set to None.
- When None is selected in “ 順序類型 ”, “ 初始值 ” shows “---” and you cannot set a value. Selecting Horizontal or Backbone however, allows you to set the “ 初始值 ” from 1 to 99,999.

熱縮套管

When using 熱縮套管, the 熱縮套管 setting screen is displayed when any of the labelling application type keys are pressed.

- 長度：**自動**, 25mm-999mm

However, the maximum printing length is 500 mm when using 熱縮套管 with a width of 5.8 or 8.8 mm.

Text: Type in single or multiple lines of data.



When using 熱縮套管：

- You cannot print frames.
- Portions of some decorative characters may be cut off when a line is broken.
- The printed characters may be smaller than when using TZe tape.

Setting Cross-ID

When printing Cross-ID labels, use the **Cable Wrap** and **Cable Flag** keys.

- Press the **Cable Wrap** or **Cable Flag** key.
- Select “Cross-ID” using the ▲ or ▼ key.
- Select “開” or “Cross-ID” by using the ◀ or ▶ key.
- 1 line: Enter the text and insert “/” or “\” where you want to apply Cross-ID.
2 or more lines: To apply the Cross-ID layout, press the 段落更換 key to create another line.


1 line

For example:

AD07/15:A1	15:A1/AD07
------------	------------

2 or more lines

AD07-15:A1	AG13-08:01
AG13-08:01	AD07-15:A1



Entering and Editing Text


Entering Text from the Keyboard

- The keyboard of your P-touch can be used in the same way as a standard computer keyboard.


► Switching Upper Case/Lower Case

Press the A/a key to switch the upper case or lower case.

Upper case (A/a key is ON)



Lower case (A/a key is OFF)



► Select The Input Method

[倉頡 / 簡易倉頡 / 廣東拼音]

Press 倉 / 簡 / 廣 key to toggle between 倉頡 / 簡易倉頡 / 廣東拼音 input methods.

Use 廣東拼音 to enter texts

Select 廣東拼音 and then press 空格 / 轉換 key to enter Chinese characters. You can convert Chinese characters word by word.

Example " 香 "

1 Under 廣東拼音 input method, type "HONG".




2 Press 空格 / 轉換 Optional Chinese characters for "HONG" will appear on the screen.



3 Press 空格 / 轉換 key or ▲、▼、◀、or ▶ to convert optional Chinese characters, and then select " 香 ".

4 Press 執行 key. " 香 " will be inputted.



- You can convert up to 25 uncertain Chinese characters at one time.
- Once confirmed, you can't convert them.
- If you want to stop converting Chinese characters, please press 取消 key.
- Before converting Chinese characters, if you press 取消 key, the inputted character will be cleared immediately and return to the initial input state.
- This product has learning function, can display Chinese characters on priority.

Use 倉頡 to enter texts.

Input radicals, and convert Chinese characters word by word.



- You can input up to 5 Chinese character radicals at one time. If you want to enter a group of characters, please press 空格 / 轉換 key to convert Chinese characters, and then enter the next character.

Example " 仲 "

1

2

3

4

5

6

7

8

9

1 Under 倉頡 input method, type .

To clear inputted texts word by word, press 倒退 key.

To clean all inputted texts, press 取消 key.




2 Press 空格 / 轉換 key.



3 Press 空格 / 轉換 key or ▲, ▼, ◀, or ▶ key to convert Chinese characters, and then press " 仲 ".

4 Press 執行 key.

" 仲 " will be inputted.




Use 簡易倉頡 input Method to enter texts

This method is to input the first and last radicals of 倉頡, and then convert optional Chinese characters. Follow the steps below to convert Chinese characters word by word.

Example " 虎 "

1 Under 簡易倉頡 input method, type .

" 卜弓 " will be displayed in reverse, and at the same time the optional characters will appear on the screen. If you convert a Chinese character, it will be confirmed when you input next character.



2 Press 空格 / 轉換 key or ▲, ▼, ◀ or ▶ key to convert Chinese characters, and then press " 虎 ".



3 Press 執行 key.

" 虎 " will be inputted.



Adding a New Line

- To end the current line of text and start a new line, press the 段落更換 key. A return mark appears at the end of the line and the cursor moves to the start of the new line.



- Maximum number of lines
 - 24 mm tape: 7 lines
 - 18 mm tape: 5 lines
 - 12 mm tape: 3 lines
 - 9 mm and 6 mm tape: 2 lines
 - 3.5 mm tape: 1 line

Adding a New Block

- When GENERAL is selected, you can create up to 99 new blocks. To create a new block of text/lines to the right of your current text, press the **Shift** key and then press the 段落更換 key. The cursor moves to the start of the new block. In other labelling application types, you can set the number of blocks when pressing a label application key. Some labelling application types are not required.

Moving the Cursor

- Press the ▲, ▼, ◀ or ▶ key to move the cursor one space or line.
- To move the cursor to the beginning or end of the current line, press the **Shift** key and then press the ◀ or ▶ key.
- To move the cursor to the beginning of the previous or next block, press the **Shift** key and then press the ▲ or ▼ key.

Inserting Text

- To insert additional text into an existing line of text, move the cursor to the character at the right of the position where you want to start inserting text, and then enter the additional text. The new text is inserted to the left of the cursor.

Deleting Text

■ Deleting one character at a time


- To delete a character from an existing line of text, move the cursor to the character at the right of the position you want to start deleting text, and then press the 倒退 key. The character to the left of the cursor is deleted each time the 倒退 key is pressed.

💡 If you hold down the 倒退 key, the characters left of the cursor are continuously deleted.

■ Deleting all text at once

Use the 全部刪除 key to delete all text at once.


- 1 Press the 全部刪除 key.
The Clear options are displayed.



- 2 Using the ▲ or ▼ key, select “內容” to delete all text while retaining the current format settings, or select “內容和格式” to delete all text and format settings.

- 💡
- Press the 取消 key to return to the text entry screen, without erasing (or clearing) text or format.
 - When “內容和格式” is selected, all text is cleared and the P-touch set to the default settings.

- 3 Press the 執行 or 段落更換 key.
All text is deleted. All format settings are also deleted if “內容和格式” was selected.



Entering 符號

In addition to the 符號 available on the keyboard, there are various 符號 (including international, extended ASCII characters and the user-defined characters ^{*1}) available with the symbol function.

To enter a 符號, use the 符號 function (see below).

Alternatively, press the **Shift** key and then press a key on the keyboard to enter the 符號 printed on the selected key's upper-right corner.

Selectable “ 符號 ” (excluding the user-defined characters) are listed in the Appendix. (See page 59.)

To use the user-defined characters, transfer the bitmap image to the P-touch using the P-touch Transfer Manager.

^{*1} A bitmap image of a user-created character that is not pre-installed on the P-touch.

Entering 符號 Using the Symbol Function

- 1 Press the 符號 key.
A list of 符號 categories and 符號 in that category is displayed.



The last 符號 entered is selected in the displayed list.

- 2 Select a 符號 category (標點, 數學, etc.) using the ▲ or ▼ key and then press the 執行 or 段落更換 key.

- 3 Select a 符號 using the ▲, ▼, ◀ or ▶ key, and then press the 執行 or 段落更換 key. The selected 符號 is inserted into the line of text.



When selecting a 符號:

- Press the **Shift** key and 符號 key to return to the previous page.
- Press the 符號 key to go to the next page.



Press the 取消 key to return to the previous step.

Entering the User-defined Character Using the Symbol Function

- ! Before using the user-defined character images, transfer the images to the P-touch using the P-touch Transfer Manager. For the P-touch Transfer Manager refer to “Using P-touch Transfer Manager (For Windows)” on page 29.

- 1 Press the 符號 key.
A list of 符號 categories and 符號 in that category is displayed.
If a user-defined character has been transferred, “ 客製化 ” is also displayed.



The last symbol entered is selected in the displayed list.

- 2 Select “ 客製化 ” using the ▲ or ▼ key and then press the 執行 or 段落更換 key.

- 3 Select a user-defined character image using the ▲ or ▼ key, and then press the 執行 or 段落更換 key.
The selected image is inserted into the line of text.



- When selecting a 符號, press the 符號 key to go to the next page.
- The inserted user-defined character image is displayed as a highlighted user-defined character mark () in the text entry screen.
- To view the user-defined character image in the text entry screen, move the cursor to the image and press the 符號 key.



Press the 取消 key to return to the previous step.


Using 常用符號儲存

You can create your personal category of 符號 by using the 常用符號儲存. The “History” will appear first when selecting the 符號, to help you locate the desired 符號 quickly.


- ! User-defined characters cannot be added to the 常用符號儲存 even if they are transferred to the P-touch.

- 1 Press the 設定 key, select “進階” using the ▲ or ▼ key and then press the 執行 or 段落更換 key.

- 2 Select “常用符號儲存” using the ▲ or ▼ key and press the 執行 or 段落更換 key. Then select “是” to create your personal category by using the ▲ or ▼ key.




- 3 Press the 執行 or 段落更換 key to apply the setting.
The screen returns to the text entry screen.




- 4 Enter the 符號 you wish to add to your History.



Refer to “Entering 符號 Using the Symbol Function” on page 10 for detail.



- 5 Press the 符號 key.
The “History” appears, including the 符號 entered in step 4.




- Up to 30 符號 can be added to the “History”. The oldest symbol will be deleted from the category when the 符號 added to the “History” exceed 30 符號.
- To stop using the 常用符號儲存, select “否” in the “常用符號儲存” screen.



Setting Character Attributes

Setting Character Attributes by Label

Using the **字形** key, you can select a font and apply 字大小, 字寬, 字體, 底線, and 對齊 attributes. Selectable "Character Attribute" options are listed in the Appendix. (See page 61.)

- 1 Press the **字形** key.
The current settings are displayed.
- 2 Select an attribute using the **▲** or **▼** key, and then set a value for that attribute using the **◀** or **▶** key.
- 3 Press the **執行** or **段落更換** key to apply the settings.


 New settings are NOT applied if you do not press the **執行** or **段落更換** key.


-  • Press the **取消** key to return to the previous step.
- Press the **空格 / 轉換** key to set the selected attribute to the default value.
- Small characters may be difficult to read when certain styles are applied.
- Depending on the labelling application type, you cannot change the value in **字形** setting. In this case,  is displayed on the preview in the right side of the screen.


Setting Character Attributes by Each Line

When a label consists of two or more lines of text, you can set different values of character attributes (字大小, 字寬, 字體, 底線, and 對齊) for each line.

Move the cursor to the line you wish to modify by using the **↑**, **▼**, **◀** or **▶** key. Next, press the **Shift** key and then press the **字形** key to display the attributes. (**≡** on the screen indicates that you are now applying the attribute for that specific line only.)



-  When different attribute values are set for each line, the value will be displayed as ***** when you press the **字形** key. When you change the setting on this screen by using the **▲** or **▼** key, the same change will be applied to all lines of the label.



Setting 自動縮小設定

When “字大小” of the 字形 key is set to “自動” and label length is set to a specific length, you can select the way of reducing the text size to fit within the label length.

- 1 Press the 設定 key, select “進階” using the ▲ or ▼ key, and then press the 執行 or 段落更換 key.
- 2 Select “自動縮小設定” using the ▲ or ▼ key and then press the 執行 or 段落更換 key.
- 3 Select the style using the ▲ or ▼ key.



- When “等比例縮小” is selected, the total text size is modified to fit within the label.
- When “字寬優先縮小” is selected, the text width will be reduced to the size of x 1/2 setting. (If further size reduction is required to fit the text into the selected label length, the total text size will be modified after reducing the text width to x 1/2 setting.)


- 4 Press the 執行 or 段落更換 key to apply the settings.

- Press the 取消 key to return to the previous step.
- Press the 空格 / 轉換 key to set the style to the default setting (“等比例縮小”).

Setting 外框

You can select the frame of the label by using the 字形 key. Selectable “外框” are listed in the Appendix. (See page 63.)

- 1 Press the 字形 key. The current settings are displayed.




- 2 Select an attribute using the ▲ or ▼ key until the “外框” is selected, and then select a frame by using the ◀ or ▶ key.



- 3 Press the 執行 or 段落更換 key to apply the settings.




New settings are NOT applied if you do not press the 執行 or 段落更換 key.





- Press the 取消 key to return to the previous step.
- Press the 空格 / 轉換 key to set the selected attribute to the default value.





Tape Cutting Options





The tape cutting options allow you to specify how the tape is fed and cut when printing labels.

- 1 Press the 設定 key.
- 2 Select “ 兩端空白 ” using the ▲ or ▼ key, and then press the 執行 or 段落更換 key.
- 3 Set the value by using the ▲ or ▼ key, and then press the 執行 or 段落更換 key to apply the settings.
-  New settings are NOT applied if you do not press the 執行 or 段落更換 key.

-  • Press the 取消 key to return to the previous step.
-  • Refer to the Tape Cutting Options table for a list of all available settings.

●Tape Cutting Options●

No	Full cut	Half cut	Chain	Image
1	No	Yes	No	
2	Yes	Yes	No	
3	No	No	No	
4	Yes	No	No	
5	No	Yes	Yes	

No	Full cut	Half cut	Chain	Image
6	Yes	Yes	Yes	
7	No	No	Yes	
8	Yes	No	Yes	
9	Special tape			

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

LABEL PRINTING


Label Preview

You can preview the current page and check the layout before printing.

1 Press the 預覽 key.

An image of the label is displayed on the screen.

1. The bar indicates the position of the currently displayed portion of the label.
2. The tape width of the installed tape cassette and the label length are indicated as follows:
Tape width x Label length
3. The information for the installed tape cassette is detected and indicated. The first line indicates the character colour and the second line indicates the tape colour.



Press the ◀ or ▶ key to scroll the preview to the left or right.

Press the ▲ or ▼ key to change the magnification of the preview.




- Press the 取消, 執行 or 段落更換 key to return to the text entry screen.
- To scroll the preview to the left or right end, press the **Shift** key and then press the ◀ or ▶ key.
- To print the label directly from the preview screen, press the 列印 key or open the print options screen and select a print option. Refer to "Printing a Label" on page 16 for details.
- The print preview is a generated image of the label, and may differ from the actual label when printed.
- The character colour and tape colour cannot be detected for some tape cassettes.

Printing a Label

Labels can be printed once text entry and formatting is complete.



- **Do not pull the label coming out of the tape exit slot. Doing so will cause the ink ribbon to be discharged with the tape, making the tape no longer usable.**
- Do not block the tape exit slot during printing or when feeding tape. Doing so will cause the tape to jam.
- Be sure to check that there is enough tape remaining when printing several labels continuously. If tape is running low, set fewer copies, print labels one at a time, or replace the tape cassette.
- Striped tape indicates the end of the tape cassette. If this appears during printing, press and hold the **Power** key to turn the P-touch off. Attempting to print with an empty tape cassette may damage the P-touch.



Printing a Single Page

Press **列印** key to start printing.

Printing a Range of Pages

When there are multiple pages, you can specify the range of pages to print.

- 1 Press the **列印** key. The screen you can specify the range is displayed.
- 2 Select “全部”, “當前畫面” or “範圍” by using **▲** or **▼** key. If you select “全部” or “當前畫面”, go to step 4.
- 3 Specify the first page and the last page.



Blank pages are not printed.

- 4 Press the **執行** or **段落更換** key to print.

Printing Multiple Copies

Using this function you can print up to 99 copies of the same label.

- 1 Make sure that the appropriate tape cassette is inserted and ready for printing.
- 2 Press the **Shift** key and then press the **列印** key to display the Copies screen, and then select the number of copies to be printed using the **▲** or **▼** key, or type the number using the number keys.



Hold down the **▲** or **▼** key to change the number of copies quickly.

- 3 Press the **執行** or **段落更換** key. “正在列印。” is displayed while the labels are being printed.

正在列印 2/5



If you select an automatic cutting option when printing multiple copies of a label, a message will be displayed to confirm whether you want the labels to be cut after each label is printed. To disable the message display, press the **設定** key, select “進階” using the **▲** or **▼** key, and then press the **執行** or **段落更換** key. Select “暫停裁切” using the **▲** or **▼** key, and then press the **執行** or **段落更換** key. Select “關” using the **▲** or **▼** key, and then press the **執行** or **段落更換** key.



- Press the **取消** key to return to the previous step.
- The figures shown on the screen during printing indicate the “count/number of copies set”.
- Pressing the **空格 / 轉換** key when setting the number of copies resets the value to 01, the default.
- When the message “按下列印切斷標籤帶並繼續” is displayed, press the **列印** key. To set whether the tape is cut after each label is printed, use “兩端空白”. For details, refer to “Tape Cutting Options” on page 14.
- To print a label created using the transferred template, refer to “Using the Data Transferred to the P-touch” on page 38.

Attaching Labels

- 1** | If necessary, trim the printed label to the desired shape and length using scissors, etc.
- 2** | Peel the backing from the label.
- 3** | Position the label and then press firmly from top to bottom with your finger to attach the label.



- The backing of some types of tapes may be pre-cut to make it easier to peel the backing. To remove the backing, simply fold the label lengthwise with the text facing inward, to expose the inside edges of the backing. Next, peel off the backing one piece at a time.
- Labels may be difficult to attach to surfaces that are wet, dirty, or uneven. The labels may peel off easily from these surfaces.
- Be sure to read the instructions provided with Fabric Tapes, Extra Strength Adhesive Tapes or other special tapes and observe all precautions noted in the instructions.

USING THE FILE MEMORY

You can store up to 99 of your most frequently used labels in the file memory. Each label is stored as a file, allowing you to quickly and easily recall your label when needed again.



- When the file memory is full, each time you save a file you will need to overwrite one of your stored files.
- The available space in the file memory can be confirmed using the following procedure. Press the **設定** key, select “使用量” using the **▲** or **▼** key, and then press the **執行** or **段落更換** key. Select “本機內容” using the **▲** or **▼** key and press the **執行** or **段落更換** key.
- * The available space that is displayed in “可使用：剩餘字元” may be different from the actual available space.

Storing a Label into Memory

- 1 After entering the text and formatting the label, press the **檔案** key.



If one or more of the labels are transferred, a screen will be displayed to select “標籤機檔案” or “電腦格式轉換” when you press the **檔案** key. Select “標籤機檔案”.

- 2 Select “儲存” using the **▲** or **▼** key and press the **執行** or **段落更換** key. A file number is displayed.
A label text is also displayed if a label is already stored in that file number.

- 3 Select a file number using the **▲** or **▼** key, and then press the **執行** or **段落更換** key.



When there is already a stored file in the selected number, the data will be overwritten by the file you try to save.

- 4 Enter the file name and then press the **執行** or **段落更換** key.
The file is saved and the screen returns to the text entry screen.



Press the **取消** key to return to the previous step.

Opening a Stored Label File

- 1 Press the **檔案** key.



If one or more of the labels are transferred, a screen will be displayed to select “標籤機檔案” or “電腦格式轉換” when you press the **檔案** key. Select “標籤機檔案”.

- 2 Select “開啟舊檔” using the **▲** or **▼** key and press the **執行** or **段落更換** key. The file number of a stored label is displayed.
The label text is also displayed to identify the label.

- 3 Select a file number using the **▲** or **▼** key, and then press the **執行** or **段落更換** key to open the selected file. The file is opened and displayed on the text entry screen.



Press the **取消** key to return to the previous step.

Printing a Stored Label File

- ❗ To print a label created using the transferred template, refer to “Using the Data Transferred to the P-touch” on page 38.

- 1 Press the **檔案** key.
- 2 Select “**列印**” using the ▲ or ▼ key, and then press the **執行** or **段落更換** key.
The file number of a stored label is displayed.
The label text is also displayed to identify the label.
- 3 Select a file number using the ▲ or ▼ key, and then press the **列印**, **執行** or **段落更換** key.
 - Printing a single page:
A single page is printed immediately.
 - Printing a range of pages:
The screen you can specify the range is displayed. Select “**全部**” or “**範圍**” by using the ▲ or ▼ key, and then press the **執行** or **段落更換** key.

💡 If you select “**範圍**”, specify the first page and the last page.

- 💡
- Press the **取消** key to return to the previous step.
 - The message “**資料未輸入!**” is displayed when you try to print a file with no text.
 - When the message “**按下列印切斷標籤帶並繼續**” is displayed, press the **列印** key.
To set whether the tape is cut after each label is printed, use “**兩端空白**”. For details, refer to “Tape Cutting Options” on page 14.

Deleting a Stored Label File

- ❗ To delete a label using the transferred template, refer to “Deleting the Transferred Data” on page 44.

- 1 Press the **檔案** key.
- 2 Select “**刪除**” using the ▲ or ▼ key and press the **執行** or **段落更換** key.
The file number of a stored label is displayed.
The label text is also displayed to identify the label.
- 3 Select a file number using the ▲ or ▼ key, and then press the **執行** or **段落更換** key.
The message “**要刪除嗎?**” is displayed.
- 4 Press the **執行** or **段落更換** key to delete the file.

💡 Press the **取消** key to cancel deleting the file and return to the previous screen.

USING P-TOUCH SOFTWARE

Using P-touch Editor

You will need to install P-touch Editor and the printer driver to use your P-touch with your computer.

For details on how to install the P-touch software, please refer to the Quick Setup Guide. Refer to the procedures below for your computer's operating system. In the screen shots, "XX-XXXX" is displayed to represent the P-touch model number.

To download the latest driver and software, please visit the Brother support website at: support.brother.com.


Using P-touch Editor (For Windows)

■ Starting P-touch Editor

1 For Windows 7

From the Start button, click [All Programs] - [Brother P-touch] - [P-touch Editor].

When P-touch Editor starts, select whether you want to create a new layout or open an existing layout.



For Windows 8.1/Windows Server 2012

Click [P-touch Editor] on [Apps] screen or double-click [P-touch Editor] on the desktop. When P-touch Editor starts, select whether you want to create a new layout or open an existing layout.



- You can also start P-touch Editor using shortcuts, if you selected to create shortcuts during installation.
- Shortcut icon on the desktop: double-click to start P-touch Editor
- Shortcut icon in the Quick Launch bar: click to start P-touch Editor
- To change how P-touch Editor functions when it starts, click [Tools] - [Options] in the P-touch Editor menu bar to display the [Options] dialog box. On the left side, select the [General] heading and then the desired setting in the [Operations] list box under [Startup Settings]. The default setting is [Display New View].

1

2

3

4

5


6

7


8

9

2 Select an option in the screen.

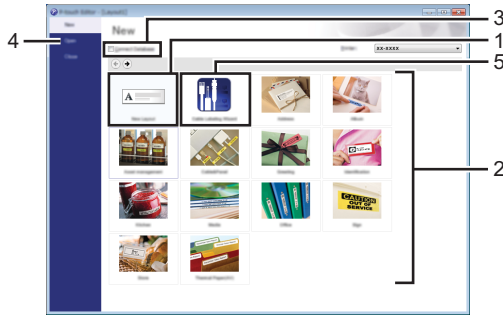

1. To create a new layout, click the [New Layout] button.
2. To create a new layout using a pre-set layout, select the desired category button.
3. To connect a pre-set layout to a database, select the check box next to [Connect Database].
4. To open an existing layout, click [Open].
5. To open the application for easily creating labels for electrical equipment management, click the [Cable Labelling Wizard] button.

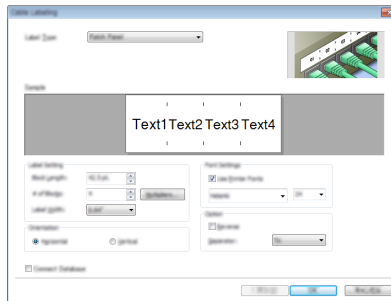


■ Operation modes

P-touch Editor has three different operation modes: [Express] mode, [Professional] mode, and [Snap] mode. You can easily switch between modes by using the mode selection buttons.

[Express] mode

This mode allows you to quickly and easily create layouts that include text and images. The [Express] mode screen is explained below:

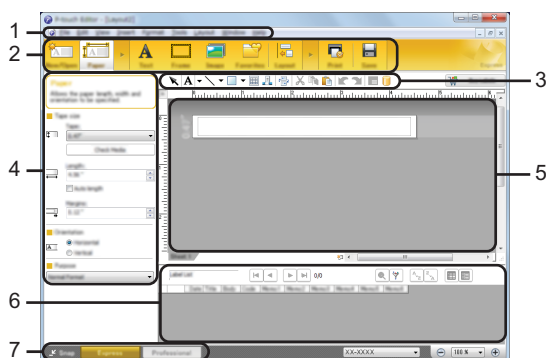

1. Menu bar
2. Command bar
3. Draw/Edit toolbar
4. Property bar
5. Layout window
6. Database window
7. Mode selection buttons

1

2

3

4

5

6


7

8

9

[Professional] mode

This mode allows you to create layouts using a wide-range of advanced tools and options. The [Professional] mode screen is explained below:

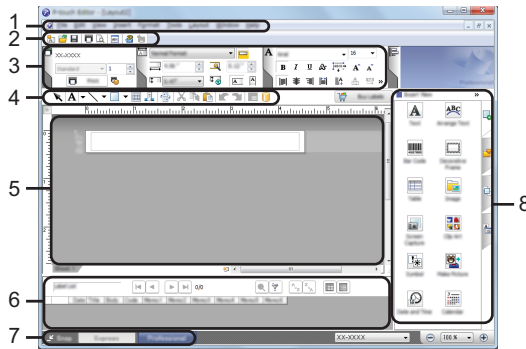


1. Menu bar
2. Standard toolbar
3. Property palette
4. Draw/Edit toolbar
5. Layout window
6. Database window
7. Mode selection buttons
8. Side bar

[Snap] mode

This mode allows you to capture all or a portion of your computer screen content, print it as an image, and save it for future use.

- 1 Click the [Snap] mode selection button.
The [Description of Snap mode] dialog box is displayed.



- 2 Click [OK].
The [Snap] mode palette is displayed.



- If you select the [Do Not Display This Dialog Again] check box in the [Description of Snap mode] dialog box, next time you will switch to [Snap] mode without displaying the dialog box.
- **For Windows 7**
You can also start P-touch Editor in [Snap] mode by clicking the Start menu - [All Programs] - [Brother P-touch] - [P-touch Editor (Snap mode)].
- **For Windows 8.1/Windows Server 2012**
You can also start P-touch Editor in [Snap] mode by clicking [P-touch Editor (Snap mode)] on the [Apps] screen.

Using P-touch Editor (For Mac)**■ Starting P-touch Editor**

- 1 Double-click [P-touch Editor] icon on the desktop.

- The following method can also be used to start the P-touch Editor.
Double-click [Macintosh HD] - [Applications] and then [Brother P-touch Editor] application icon.


P-touch Editor starts.

■ Operation modes

Standard Mode

This mode provides easy label creation with text and images.

The layout window consists of the following sections:

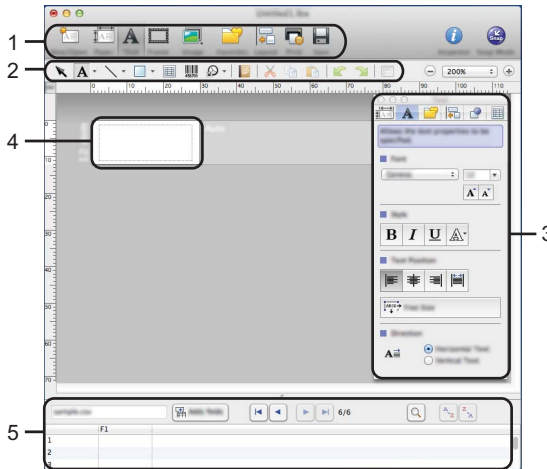

* This screen may be different depending on your P-touch Editor version.

1. Command bar
2. Draw/Edit toolbar
3. Inspector
4. Layout window
5. Database window


Snap Mode (P-touch Editor 5.1 only)

With this mode, you can capture the screen, print it as an image, and save it for future use. To start the Snap mode, follow the steps below.

- 1 When you click [Snap Mode], the [Description of Snap mode] dialog box appears. Click [OK].



If you select [Do Not Display This Dialog Again], you can go to Snap mode directly from the next time.



- 2 Snap mode appears.



Updating P-touch Editor

The software can be upgraded to the latest available version using the P-touch Update Software.

In the following steps, you will see XX-XXXX. Read “XX-XXXX” as your P-touch name.



- You must be connected to the internet in order to launch the P-touch Update Software.
- You may find that the software and the contents in this manual are different.
- Upon installation of the P-touch Update Software, an icon will be installed on your desktop for your convenience.
- Do not turn off the power when transferring data or updating software.

■ Updating P-touch Editor Software (For Windows)



To use the P-touch Update Software, it is necessary to install it from the CD-ROM provided. You can also download the software from the Brother support website support.brother.com.

1 For Windows 7

Double-click the [P-touch Update Software] icon.



The following method can also be used to start the P-touch Update Software.


Click the Start button, and then select [All Programs] - [Brother P-touch] - [P-touch Update Software].



For Windows 8.1/Windows Server 2012

Click [P-touch Update Software] on the [Apps] screen or double-click [P-touch Update Software] on the desktop.

2 Click the [Computer software update] icon.



1

2

3

4

5


6

7

8

9


- 3** Select the [Printer] and [Language], select the check box next to P-touch Editor and then click [Install].

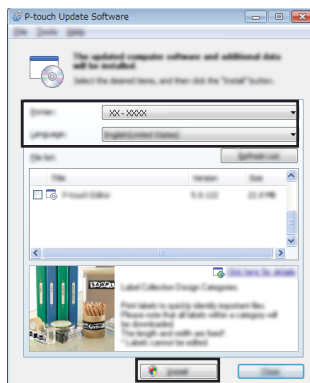

A message is displayed to indicate that installation has finished.

■ Updating P-touch Editor Software (For Mac)



Please visit the Brother support website support.brother.com to upgrade the software. Mac users can access this URL directly by clicking the  icon found on the CD-ROM.

Using P-touch Transfer Manager (For Windows)

This application allows you to transfer templates and other data to the P-touch and save backups of your data on the computer.

This function is not supported with Mac computers.

There are some restrictions regarding the templates that can be transferred to the P-touch. For details, refer to “Notes on Using P-touch Transfer Manager (For Windows)” on page 65.

How to Use P-touch Transfer Manager

1] Create or open a template using P-touch Editor.

- Prepare the P-touch Editor and open/edit the template.
P. 21
- Update the P-touch Editor if necessary.
P. 27
- Notes on using P-touch Transfer Manager (For Windows).
P. 65



2] Transfer the template to P-touch Transfer Manager.

- Transferring the label template to P-touch Transfer Manager.
P. 29



3] Transfer the template to the P-touch using P-touch Transfer Manager.

- Using P-touch Transfer Manager.
P. 30
- Transferring templates or other data from the computer to the P-touch.
P. 31



4] Print (without using a computer) the template that was transferred to the P-touch.

- Printing the transferred template.
P. 38

Transferring the Label Template to P-touch Transfer Manager

The label templates created in P-touch Editor must first be transferred to P-touch Transfer Manager.

1] In P-touch Editor, open the label template to be transferred.

- #### 2] Click [File] - [Transfer Template] - [Preview].
- You can check a preview of the printed template before the created template is sent to the P-touch and printed.

- 3 If there are no problems with the displayed template, click [Transfer Template].
P-touch Transfer Manager starts.



You can also start P-touch Transfer Manager using the following procedure.


- For Windows 7
From the Start button, click [All Programs] - [Brother P-touch] - [P-touch Tools] - [P-touch Transfer Manager].
- For Windows 8.1/Windows Server 2012
Click [P-touch Transfer Manager] on [Apps] screen.

Using P-touch Transfer Manager

When P-touch Transfer Manager starts, the main window is displayed.



You can also start P-touch Transfer Manager from P-touch Editor.
Click [File] - [Transfer Template] - [Transfer].

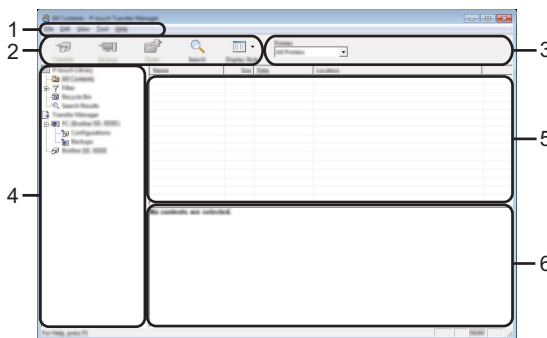

1. Menu bar

Provides access to various commands, which are grouped under each menu title ([File], [Edit], [View], [Tool], and [Help]) according to their functions.

2. Toolbar

Provides access to frequently used commands.

3. Printer selector

Allows you to select which printer or P-touch the data will be transferred to. When you select a P-touch, only the data that can be sent to the selected P-touch is displayed in the data list.

4. Folder view

Displays a list of folders and P-touch labels. When you select a folder, the templates in the selected folder are displayed in the template list.
If you select a P-touch, the current templates and other data stored in the P-touch are displayed.







5. Template list

Displays a list of templates in the selected folder.

6. Preview

Displays a preview of the templates in the templates list.

● Explanations of the Toolbar Icons ●

Icon	Button name	Function
	Transfer	Transfers templates and other data from the computer to the P-touch via USB.
	Save Transfer File (When not connected to a printer)	Changes the file type of the data to be transferred to other applications. Select “BLF” for the filename extension when transferring the data via Wi-Fi or LAN. Select “PDZ” when transferring the data via USB or Bluetooth. The available interfaces differ depending on your Brother machine.
	Backup (Only for P-touch Transfer Manager)	Retrieves the templates and other data saved in the P-touch and saves it on the computer.
	Open	Opens the selected template.
	Print Only for P-touch Library	Prints the selected label template with the P-touch.
	Search	Allows you to search for templates or other data that are registered to P-touch Library.
	Display Style	Changes the file display style.


Transferring Templates or Other Data from the Computer to the P-touch

Use the following procedure to transfer templates, databases and images from the computer to the P-touch.

- 1** Start P-touch Transfer Manager using the following procedure.
For Windows 7
From the Start button, click [All Programs] - [Brother P-touch] - [P-touch Tools] - [P-touch Transfer Manager].


For Windows 8.1/Windows Server 2012
Click [P-touch Transfer Manager] on [Apps] screen.
- 2** Connect the computer and the P-touch via USB and turn on the P-touch.
The P-touch model name is displayed in the folder view.
If you select a P-touch in the folder view, the current templates and other data stored in the P-touch are displayed.
- 3** Select the P-touch that you want to transfer the template or other data to.

USING P-TOUCH SOFTWARE

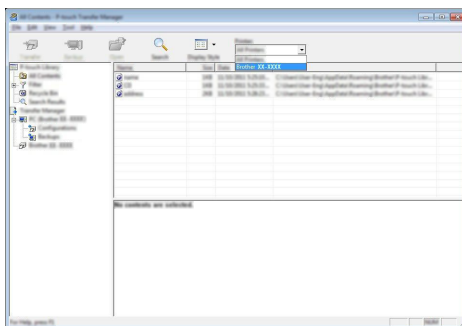

- ⚠ Before transferring data, check that the PC and the P-touch are correctly connected with a USB cable and that the P-touch power is On.

- 4 Right-click the [Configurations] folder, select [New], and then create a new folder.

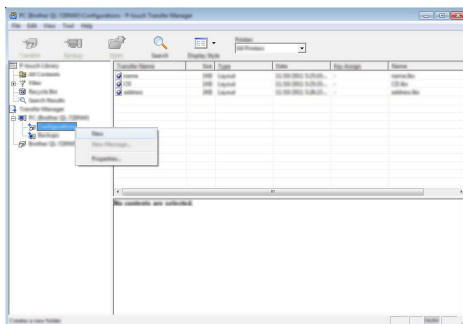

In the example above, the folder [Transfer] is created.

- 5 Drag the template or other data that you want to transfer and place it in the new folder.

● Transfer Function Specification ●

Data type	Maximum number of transferable items	Restriction details
Template	99	Each template can contain a maximum of 50 objects. Each object can contain a maximum of 7 lines.
Database	99	Only *.csv files can be transferred. Each *.csv file can contain a maximum of 255 fields and 65,000 records.
Image (User-defined character)	99	Only *.bmp files can be transferred. Monochrome *.bmp files are recommended. The size limit is 2,048 × 2,048 pixels. Wide images may be cropped.

💡 The available space in the transfer file memory can be confirmed using the following procedure.

Press the **設定** key, select “使用量” using the ▲ or ▼ key, and then press the **執行** or **段落更換** key. Select “傳輸內容” using the ▲ or ▼ key and press the **執行** or **段落更換** key.

* The available space that is displayed in “可使用 : X.XXMB” may be different from the actual available space.

1

2

3

4

5

6

7

8


9

USING P-TOUCH SOFTWARE


You can view the templates and other data by selecting the folder in the [Configurations] folder, selecting [All Contents] or by selecting one of the categories under [Filter], such as [Layouts].

When transferring multiple templates or other data, drag all the files that you want to transfer and place them in the new folder.

Each file is assigned a key number (memory location in the P-touch) when it is placed in the new folder.

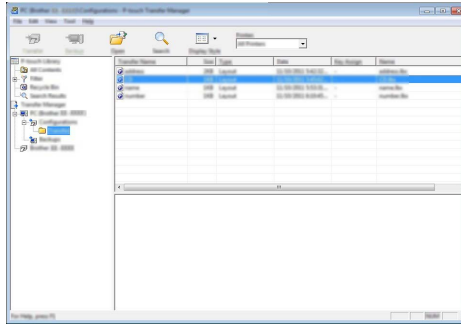



- 6** To change the key number assigned to an item, right-click the item, select [Key Assign], and then select the desired key number.

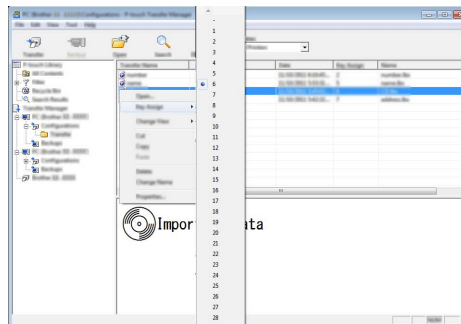


- All data transferred to the P-touch is assigned a key number.
- If the template or other data transferred to the P-touch has the same key number as another template already saved in the P-touch, the new template will overwrite the old one. You can confirm the templates key number assignments saved in the P-touch by backing up the templates or other data (refer to “Backing Up Templates or Other Data Saved in the P-touch” on page 35).
- If the P-touch memory is full, remove one or more templates from the P-touch nonvolatile memory (refer to “Backing Up Templates or Other Data Saved in the P-touch” on page 35).

- 7 To change the names of templates or other data that will be transferred, click on the desired item and enter the new name.
- 8 Select the folder containing the templates or other data that you want to transfer, and then click [Transfer]. A confirmation message will be displayed.

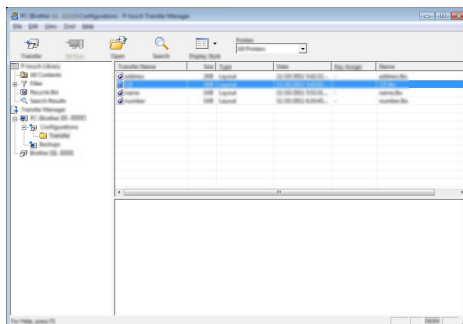


 You can also transfer individual items to the P-touch. Select the template or other data that you want to transfer, and then click [Transfer].

- 9 Click [OK].




The selected templates or other data are transferred to the P-touch.


-  To print data that was transferred to the P-touch, the P-touch must be switched from the transfer mode to the normal mode. Turn the P-touch off and then on again.

Backing Up Templates or Other Data Saved in the P-touch


Use the following procedure to retrieve the templates or other data saved in the P-touch and save it on the computer.

-  • Backed up templates or other data cannot be edited on the computer.
- Depending on the P-touch model, templates or other data backed up from one P-touch model may not be able to be transferred to another P-touch model.

- 1 Connect the computer and the P-touch and turn on the P-touch.
The P-touch model name is displayed in the folder view.
If you select a P-touch in the folder view, the current templates and other data stored in the P-touch are displayed.

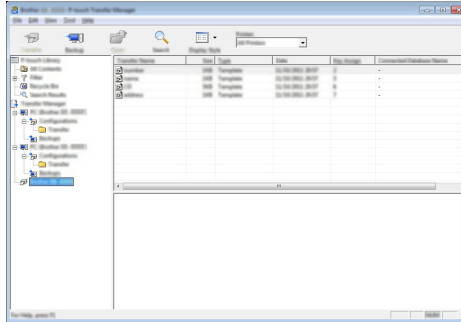

-
- 2** Select the P-touch to back up from, and then click [Backup].
A confirmation message is displayed.

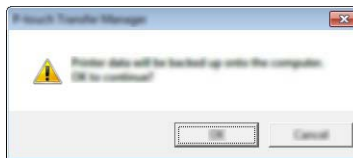


-
- 3** Click [OK].
A new folder is created under the P-touch in the folder view. The folder name is based on the date and time of the backup. All of the P-touch templates and other data are transferred to the new folder and saved on the computer.
-


Deleting All the P-touch data

Use the following procedure to delete all templates or other data that are saved in the P-touch.

-
- 1** Connect the computer and the P-touch and turn on the P-touch.
The model name is displayed in the folder view.
-
- 2** Right-click your model, and then select [Delete All].

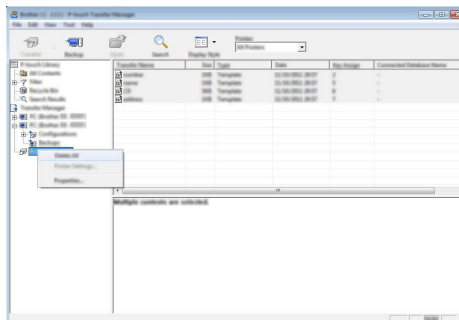

A confirmation message is displayed.



-
- 3** Click [OK].
All templates and other data saved in the P-touch are deleted.
-

1

2

3

4

5

6

7

8

9

Using the Data Transferred to the P-touch

A template, database or user-defined character image transferred from the computer can be used to create or print the label.

To delete the transferred data, refer to “Deleting the Transferred Data” on page 44.

A User-defined Character Image

To enter the image, refer to “Entering 符號” on page 10.

Printing the 傳輸內容

A label layout created with P-touch Editor (*.lhx file) can be transferred to the P-touch, where it can be used as a template for printing labels. Templates can be edited or printed using text from either a database, or by directly typing text in.

- ❗ • Before editing a template, transfer the template to the P-touch.
- When the transfer of the data to the P-touch is complete, turn the P-touch off and then on again.

■ When the template which has no object to be edited


- 1 Press the 檔案 key, select “電腦格式轉換” using the ▲ or ▼ key and then press the 執行 or 段落更換 key.



“電腦格式轉換” is displayed if a template is transferred.

- 2 Select the template to be printed using the ▲ or ▼ key and then press the 執行 or 段落更換 key.



When the template is linked to a database, the  icon appears in the upper-right corner of the screen.

- 3 Press the 列印 key to start printing.

■ When the template has an object to be edited

If necessary, the template can be temporarily edited. However, the template cannot be saved after it is changed.

When the template is not linked to a database, the label will be ready to print after you select the label template and type text into each of its fields.

When the template is linked to a database, a single record or a range of records in the database linked to the template can be printed.

- ❗ • The following procedure is for printing a single database record.
- You cannot add or delete a line break.


- 1 Press the 檔案 key, select “電腦格式轉換” using the ▲ or ▼ key and then press the 執行 or 段落更換 key.



“電腦格式轉換” is displayed if a template is transferred.

- 2 Select the template to be edited using the ▲ or ▼ key and then press the 執行 or 段落更換 key.



When the template is linked to a database, the  icon appears in the upper-right corner of the screen.

- 3 Select “編輯標籤 (不儲存)” using the ▲ or ▼ key and then press the 執行 or 段落更換 key.
Objects that can be edited are displayed.
- 4 Select the object to be edited using the ▲ or ▼ key and then press the 執行 or 段落更換 key.
 - When the template is not linked to a database:
The contents of the selected object are displayed. Edit the object and then press the 執行 or 段落更換 key.
 - When the template is linked to a database:
The first record of the database is displayed. Edit the object and then press the 執行 or 段落更換 key.

- 5 Press the 列印 key to start printing.



When editing templates linked to a database:

- When an object that is not linked to the database was edited, you can press the 取消 key to return to step 3, and then select “自資料庫列印” to print a selected range from the database.
To select the range that you want to print, refer to steps 3 to 5 in “When the template is linked to the database and will not be edited”.
- When an object that is linked to the database was edited, the edited contents will be deleted if you select “自資料庫列印”. Therefore, print the template just by pressing the 列印 key as described in step 5 above.

■ When the template is linked to the database and will not be edited

- ! • The following procedure is for printing database records. The database remains unchanged.
- When printing a range of database records, the text cannot be edited.


- 1 Press the 檔案 key, select “電腦格式轉換” using the ▲ or ▼ key and then press the 執行 or 段落更換 key.



“電腦格式轉換” is displayed if a template is transferred.

- 2 Select the template to be printed using the ▲ or ▼ key and then press the 執行 or 段落更換 key.



When the template is linked to a database, the  icon appears at the upper-right corner of the screen.

- 3 Select “自資料庫列印” using the ▲ or ▼ key and then press the 執行 or 段落更換 key.
The contents of the database linked to the template are displayed.

1

2

3

4

5

6

7

8

9

- 4** Select the first record in the range that you want to print using the ▲, ▼, ◀ or ▶ key and then press the 執行 or 段落更換 key.

num...	nam...
1 A - ...	A B
1 A - ...	A C

- 5** Select the last record in the range that you want to print using the ▲, ▼, ◀ or ▶ key and then press the 列印, 執行 or 段落更換 key to start printing.
When the range is set, the selected records will be highlighted.

num...	nam...
1 A - ...	A F
1 A - ...	A G



- Press the 取消 key to return to the previous step.
- The maximum number of characters that can be printed for one 電腦格式轉換 is 1,500 characters. However, the maximum number of characters will decrease when line breaks or blocks are added.

Using Transferred Database Data

A database converted to a *.csv file can be transferred to the P-touch.

The data for a database that was transferred without a template can be imported into each label application type. The database data is imported according to the number of blocks and pages set for each label application type. Refer to “Selecting a Labelling Application Type” in the Quick Setup Guide for details on setting the number of blocks and pages for each label application type.



- Before using a database, transfer the database to the P-touch.
- If a database and template are linked and transferred together, the database can use only that template.



- If the selected database range is larger than the set number of blocks and pages, the data will be imported until the maximum number of blocks and pages is reached.
- If the set number of blocks and pages is larger than the selected database range, the operation will finish when all of the database is imported. The remaining blocks and pages will be printed blank without any data.

The print results are shown for each label application type when the databases for the following examples are imported.

■ Example 1:

number	name①	type	length	Block No.
1A-B01	AA	a	10	#008
1A-B02	AB	b	20	#009
1A-B03	AC	c	30	#010
1A-B04	AD	d	40	#011
1A-B05	AE	e	50	#012
1A-B06	AF	f	60	#013
1A-B07	AG	g	70	#014
1A-B08	AH	h	80	#015
1A-B09	AI	i	90	#016

■ Example 2:

number	name②	type	length	Block No.
1A-B01	AA	a	10	#008
1A-B02	AB	b	20	#009
1A-B03	AC	c	30	#010
1A-B04	AD	d	40	#011
1A-B05	AE	e	50	#012
1A-B06	AF	f	60	#013
1A-B07	AG	g	70	#014
1A-B08	AH	h	80	#015
1A-B09	AI	i	90	#016

Label Application Type	Data Import Method	Print Result for Example 1 (one field per record selected)	Print Result for Example 2 (two fields per record selected)
GENERAL	Data is imported in order according to the set number of blocks and pages	<div>AA AB AC AD</div> <p>* When 2 blocks are set per page</p>	<div>AA a AB b</div> <p>* When 2 blocks are set per page</p>
FACEPLATE	For each page separately	<div>AA AB AC AD</div>	<div>AA a AB b</div>
CABLE WRAP	For each page separately	<div>AA AA AB AB AC AC AD AD</div>	<div>AA AA a a AB AB b b</div>
CABLE FLAG	For each page separately	<div>AA AA AB AB</div>	<div>AA AA a a</div>
	For each block separately	<div>AA AB AC AD</div>	<div>AA a AB b</div>
PATCH PANEL	For each block separately	<div>AA AB AC</div> <div>AD AE AF</div>	<div>AA a AB</div> <div>b AC c</div>
PUNCH-DOWN BLOCK	For each block separately	<div>AA AB AC AD AE AF</div> <div>AG</div>	<div>AA a AB b AC c</div> <div>AD d</div>
SELF-LAMINATING	For each page separately	<div>AA AB AC AD</div>	<div>AA a AB b</div>

- Press the **資料庫** key, select the database to be used and then press the **執行** or **段落更換** key.
The first record of the selected database is displayed.



- If the selected record is not changed within a certain time while the database is displayed, the contents of the record will be displayed at the bottom of the screen. However, the contents of the record will not be displayed if the record contains 3 characters or less.
- When the **預覽** key is pressed, the properties of the record will be displayed.
- When setting the range, the “field names” line (first line of data) cannot be selected.

num...	nam...
1 A - ...	A A
1 A - B 0 1	

- Select the first record in the range that you want to insert and then press the **執行** or **段落更換** key.
The selected record will be highlighted.

num...	nam...
1 A - ...	A A
1 A - ...	A B

- 3 Select the last record in the range that you want to insert and then press the **執行** or **段落更換** key.
The selected range will be highlighted.

The contents of the selected database will be displayed.

num...	nam...
1 A - ...	A C
1 A - ...	A D

倉庫	AA	A	幸	AE0
----	----	---	---	-----

1	1 A - B 0 3
GENERAL	
9mm× 77mm	

■ Searching the database

While selecting a database record to be used in a template or added to a label, you can search for records containing specific characters or a specific number.

The search proceeds to the right after the first matched string. Then, the database records will be searched in the same direction as the import order for the label type. The “field names” line will also be searched.

The possible search characters include uppercase and lowercase letters (including accented characters), numbers, and the upper 符號 shown on the keys.

- 1 Press the **資料庫** key, select the database to be used and then press the **執行** or **段落更換** key.
The first record of the selected database is displayed.

num...	nam...
1 A - ...	A A
1 A - B 0 1	

- 2 Type in the first character (e.g., “B”) that you wish to search for.
Example: If you type “B”, the fields will be searched from the first field for character strings containing “B”.

num B ...	nam...
1 A - ...	A A
number	

If a string that contains “B” is found, the cursor will move to that data and “B” will be highlighted. In addition, “B” will be stored in the internal memory.

If a string that contains the searched character “B” is not found, the cursor will remain in its current position without moving and the character “B” will not be stored in the internal memory.

- 3 Type in the 2nd character (e.g., “E”) that you wish to search for.
Next, if you type “E”, the fields will be searched from the next field for character strings containing “BE”.

num BE ...	nam...
1 A - ...	A A
number	

If a string that contains “BE” is found, the cursor will move to that data and “BE” will be highlighted. In addition, “BE” will be stored in the internal memory.

- 4 Continue searching the database using the same procedure.



- If the character that you searched for is contained in multiple fields in the database, press the **資料庫** key to move to the next field containing the character. The character will be highlighted in the field.
- Press the **倒退** key to delete the last search character that was typed. The cursor will move to the field containing the remaining search characters.

num B ...	nam...
1 A - ...	A A
number	

■ Editing the database

- 1** Press the **資料庫** key, select the database to be edited and then press the **執行** or **段落更換** key.
You can also select the database to be edited by pressing the **檔案** key, and selecting “電腦格式轉換” - “自資料庫列印” using the **▲** or **▼** key.
The first record of the selected database is displayed.

num...	nam...
1 A - ...	A A
1 A - B 0 1	

- 2** Select the cell to be edited using the **▲** or **▼** key. Then hold down the **執行** or **段落更換** key.

倉頡
1 QQ - B 0 1
++ 001 ++ 00001

- 3** Enter the new text.

倉頡
1 1 A - B 0 1
++ 001 ++ 00001

- 💡 Press the **取消** key to cancel editing the text and return to the previous screen
The number of available 符號 for editing the database is limited.

- ⚠ • The number of available symbols for editing the database is limited.
• You can add or delete a line break.
• Each cell can contain a maximum of 7 lines.

- 4** Press the **執行** key.
The new text is displayed.

- 💡 If you do not want to print the database, press the **執行** key and then press the **取消** key. The edited data will be saved.

num...	nam...
QQ - ...	A A
QQ - B 0 1	

- 5** Press the **執行** key again.
The edited record will be highlighted.

num...	nam...
QQ - ...	A A
1 A - ...	A B

- 6** When the database has been transferred with a template:
Select the last record in the range that you want to print using the **▲**, **▼**, **◀** or **▶** key and then press the **列印**, **執行** or **段落更換** key to start printing.
When the range is set, the selected records will be highlighted.


num...	nam...
1 A - ...	A C
1 A - ...	A D

- When the database has been transferred without a template:
Select the last record in the range that you want to insert and then press the **執行** or **段落更換** key.
The selected range will be highlighted.

num...	nam...
1 A - ...	A C
1 A - ...	A D

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

The contents of the selected database will be displayed.



- 7 Press the 列印 key.

Deleting the Transferred Data

Use the following methods to delete transferred data.

Multiple items cannot be deleted together. Each item must be deleted separately.

■ Deleting user-defined character images

- 1 Press the 符號 key, select “客製化” using the ▲ or ▼ key and then press the 執行 or 段落更換 key.
- 2 Select the user-defined character image to be deleted using the ▲ or ▼ key and then press the 全部刪除 key.
A message “刪除?” is displayed.
- 3 Press the 執行 or 段落更換 key.
The selected user-defined character image is deleted and the next image is selected.
If necessary, delete the next character.

■ Deleting Templates

- 1 Press the 檔案 key, select “電腦格式轉換” using the ▲ or ▼ key and then press the 執行 or 段落更換 key.
- 2 Select the template to be deleted using the ▲ or ▼ key and then press the 執行 or 段落更換 key.
- 3 Select “刪除” using ▲ or ▼ key and then press the 執行 or 段落更換 key.
A message “刪除?” is displayed.
- 4 Press the 執行 or 段落更換 key.
The selected template is deleted and the next template is selected.
If necessary, delete the next template.

■ Deleting database

- 1 Press the 資料庫 key.
- 2 Select the database to be deleted using the ▲ or ▼ key and then press the 全部刪除 key.
A message “刪除?” is displayed.
- 3 Press the 執行 or 段落更換 key.
The selected database is deleted and the next database is selected.
If necessary, delete the next database.

Using P-touch Library

P-touch Library allows you to print templates or to manage templates and other data.

Starting P-touch Library


■ For Windows 7

From the Start button, click [All Programs] - [Brother P-touch] - [P-touch Tools] - [P-touch Library].

■ For Windows 8.1/Windows Server 2012

Click [P-touch Library] on [Apps] screen.

When P-touch Library starts, the main window is displayed.

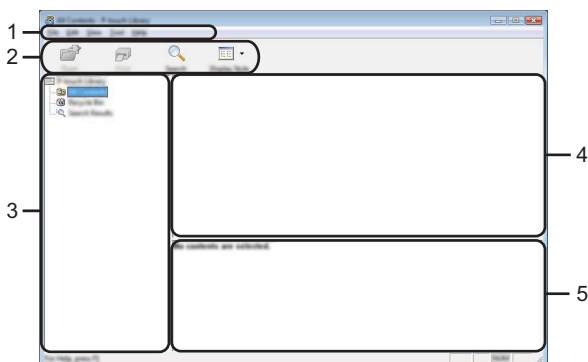

1. Menu bar

Provides access to all available commands, which are grouped under each menu title ([File], [Edit], [View], [Tool], and [Help]) according to their functions.

2. Toolbar

Provides access to frequently used commands.

3. Folder view

Displays a list of folders. When you select a folder, the templates or other data in the selected folder is displayed in the templates list.

4. Templates list

Displays a list of the templates or other data in the selected folder.

5. Preview

Displays a preview of the templates or other data selected in the templates list.

1

2

3

4

5





6

7

8


9

●Explanations of the Toolbar Icons●

Icon	Button name	Function
	Open	Opens the selected template.
	Print	Prints the selected label template with the P-touch.
	Search	Allows you to search for templates or other data that are registered to P-touch Library.
	Display Style	Changes the file display style.

Opening and Editing Templates

Select the template you want to open or edit, and then click [Open].

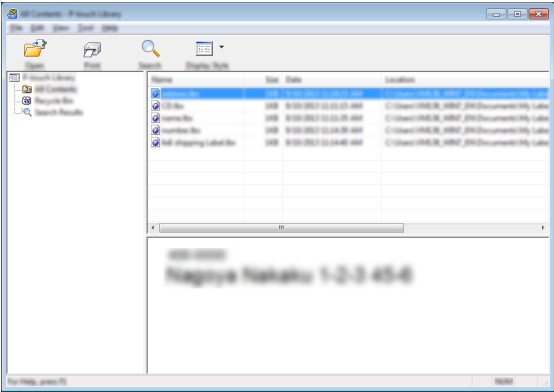


The program that is associated with the template will be started and you can edit the template.

! The program that starts depends on the type of file that is selected. For example, if you select a P-touch Template, P-touch Editor starts.

Printing Templates

Select the template that you want to print and then click [Print].

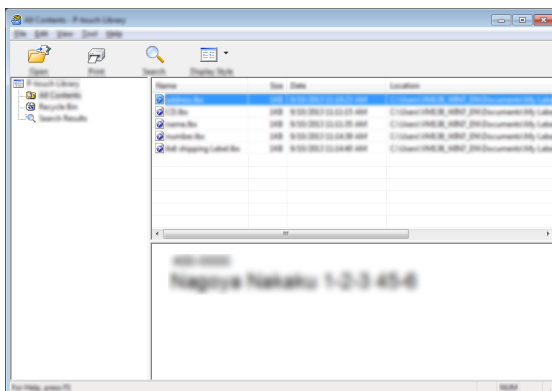


The template is printed using the connected P-touch.

Searching for Templates or Other Data

You can search for templates or other data registered to P-touch Library.

- 1 Click [Search].
The [Search] dialog box is displayed.

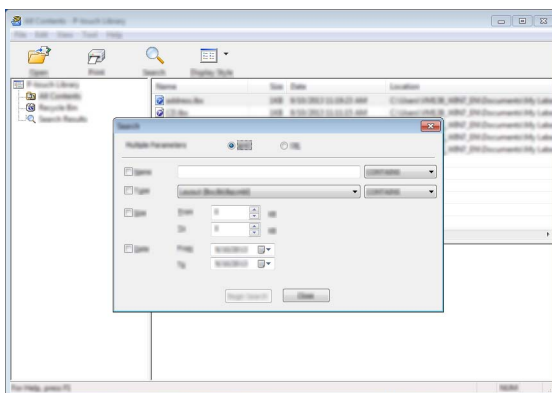

- 2 Specify the search criteria.
The following search criteria are available.

1

2

3

4

5

6


7

8

9

Setting	Details
Multiple Parameters	Determines how the program searches when multiple criteria are specified. If you select [AND], the program searches for files that satisfy all of the criteria. If you select [OR], the program searches for files that satisfy any of the criteria.
Name	Allows you to search for a template or other data by specifying the file name.
Type	Allows you to search for a template or other data by specifying the file type.
Size	Allows you to search for a template or other data by specifying the file size.
Date	Allows you to search for a template or other data by specifying the file date.

- 3 Click [Begin Search].
The search begins.

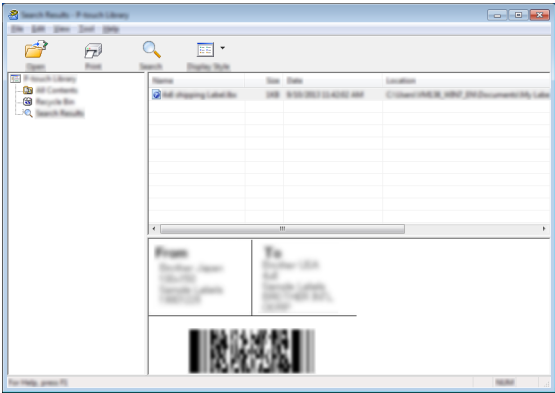

- 4 Close the [Search] dialog box.
The search results can be confirmed by clicking [Search Results] in the folder view.

- You can register templates or other data to P-touch Library by dragging and dropping it into the [All Contents] folder or to the folder view. You can also configure P-touch Editor to register templates to P-touch Library automatically, using the following procedure.
1. From the P-touch Editor menu, select [Tools] - [Options].
 2. In the [Options] dialog box, click [Registration Settings] in the [General] tab.
 3. Select the timing for registering templates created with P-touch Editor, and then click [OK].

NETWORK

● NETWORK

Configuring the Network Settings

First, you must configure the wireless network settings of your P-touch to communicate with your network.

You can select the network type, configure or display the network settings, and so on, using the **設定** key.

You can also use [Communication settings] in the Printer Setting Tool for detailed configuration.

Refer to the Network User's Guide for the network settings. You can download it from the Brother support website support.brother.com.

1

2

3

4

5

6

7

8


9

RESETTING & MAINTENANCE

Resetting the P-touch


You can reset the internal memory of your P-touch when you want to clear all saved label files, or in the event the P-touch is not operating correctly.

Resetting the Data to Factory Settings Using the P-touch Keyboard

 All text, format settings, option settings and stored label files are cleared when you reset the P-touch. Language and unit settings will also be cleared.


■ To reset all the labels and customised settings

Turn off the P-touch. Press and hold down the **Shift** and **倒退** keys. While holding down the **Shift** and **倒退** keys, press the **Power** key once and then release the **Shift** and **倒退** keys.

 Release the **Power** key before releasing the other keys.

■ To reset the customised settings

Turn off the P-touch. Press and hold down the **Shift** and **R** keys. While holding down the **Shift** and **R** keys, press the **Power** key once and then release the **Shift** and **R** keys.

 Release the **Power** key before releasing the other keys.

Resetting the Data Using the Menu Key

Press the **設定** key, select “重設” using the **▲** or **▼** key, and then press the **執行** or **段落更換** key. Select the resetting method using the **▲** or **▼** key and press the **執行** or **段落更換** key. 段落更換

Value	Details
Reset All Settings	Transferred data (templates, databases, and user-defined characters) and the contents in the file memory are NOT cleared. Other data is cleared and all settings except the Wi-Fi® settings are reset to the factory settings.
Erase All Content	Transferred data (templates, databases, and user-defined characters) and the contents in the file memory are cleared. Other data is NOT cleared and settings are NOT reset.
Factory Default	All labels, customized settings and the Wi-Fi settings are reset to the factory settings.
Reset Wi-Fi Settings	All Wi-Fi settings are reset to the factory settings.

Maintenance

Your P-touch should be cleaned on a regular basis to maintain its performance and life span.

💡 Always remove the batteries and disconnect the AC adapter before cleaning the P-touch.

Cleaning the Unit


Wipe any dust and marks from the main unit using a soft, dry cloth. Use a slightly dampened cloth on difficult to remove marks.

💡 Do not use paint thinner, benzene, alcohol or any other organic solvent. These may deform the case or damage the appearance of your P-touch.

Cleaning the Print Head

Streaks or poor quality characters on printed labels generally indicates that the print head is dirty. Clean the print head using a cotton swab or the optional print head cleaning cassette (TZe-CL4).


1. Print head
- Do not touch the print head directly with your bare hands.
 - Refer to the instructions provided with the print head cleaning cassette for directions on how to use it.



Cleaning the Tape Cutter

Tape adhesive can build up on the cutter blades after repeated use, dulling the blade which may result in the tape jamming.

- About once every year, wipe the cutter blade using a dry cotton swab.
- Do not touch the cutter blade directly with your bare hands.



1

2

3

4

5

6


7

8

9

TROUBLESHOOTING

What to do when...


Problem	Solution
The screen “locks”, or the P-touch does not respond normally.	Refer to “Resetting the P-touch” on page 50 and reset the internal memory to the initial settings. If resetting the P-touch does not solve the problem, disconnect the AC adapter and remove the batteries for more than 10 minutes.
The display remains blank after turning on the power.	<ul style="list-style-type: none"> • Check that the batteries are correctly installed and that the AC adapter designed exclusively for your P-touch (provided) is correctly connected. • Check that the rechargeable Li-ion battery is fully charged.
The label is not printed after pressing the 列印 key.	<ul style="list-style-type: none"> • Check that text has been entered and that the tape cassette is installed correctly with sufficient tape remaining. • If the tape is bent, cut off the bent section and thread the tape through the tape exit slot. • If the tape is jammed, remove the tape cassette and then pull out the jammed tape and cut it. Check that the end of the tape passes through the tape guide before reinstalling the tape cassette.
The label is not printed correctly.	<ul style="list-style-type: none"> • Remove the tape cassette and reinstall it, pressing it firmly until it clicks into place. • If the print head is dirty, clean it with a cotton swab or optional print head cleaning cassette (TZe-CL4).
The ink ribbon is separated from the ink roller.	<p>If the ink ribbon is broken, replace the tape cassette. If not, leave the tape uncut and remove the tape cassette, then wind the loose ink ribbon onto the spool as shown in the figure.</p> <p>1. Spool</p> 
The P-touch stops while printing a label.	<ul style="list-style-type: none"> • Replace the tape cassette if striped tape is visible, as this indicates that you have reached the end of the tape. • Replace all batteries or connect the AC adapter directly to the P-touch.
The label is not cut automatically.	<ul style="list-style-type: none"> • Check the Cut Option setting. For details, refer to “Tape Cutting Options” on page 14. <p>Alternatively, press the 送帶&裁切 key to feed and cut the tape.</p>
A tape jam error which cannot be cleared despite following troubleshooting.	Please contact Brother customer service.

Problem	Solution
When printing multiple copies of a label, a message is displayed to confirm whether you want the labels to be cut after each label is printed.	<p>Because the cut labels must not remain in the tape exit slot, the message is displayed.</p> <p>To disable the message display, press the 設定 key, “進階” using the ▲ or ▼ key, and then press the 執行 or 段落更換 key. And select “暫停裁切” using the ▲ or ▼ key, then press the 執行 or 段落更換 key.</p>
I do not know the version number of the firmware for the P-touch.	<p>The version number and other information for the firmware can be confirmed using the following procedure. Press the 設定 key, select “Version Info.” using the ▲ or ▼ key, and then press the 執行 or 段落更換 key.</p>
Printed bar codes cannot be read.	<ul style="list-style-type: none"> • Print labels so that bar codes are aligned with the print head as shown below. <div data-bbox="521 555 835 716" data-label="Image"> </div> <ol style="list-style-type: none"> 1. Print head 2. Bar code 3. Printing orientation <ul style="list-style-type: none"> • Try using another scanner. • We recommend printing the bar codes with [Standard] selected from the [Quality] options. <p>For Windows 8.1 / Windows Server 2012: To display the Quality options, open the printer properties by clicking Control Panel in the Apps screen > Hardware and Sound > Devices and Printers, right-clicking the printer you want to set up, and then clicking Printing preferences.</p> <p>For Windows 7: To display the Quality options, open the printer properties by clicking Start > Devices and Printers, right-clicking the printer you want to set up, and then clicking Printing preferences.</p>
I want to confirm whether I am using the latest version of the software.	<ul style="list-style-type: none"> • Download the P-touch Update Software from Brother support website (support.brother.com) provided to confirm whether you are using the latest version of the software. • Refer to the Quick Setup Guide for details about the P-touch Update Software.

Error Messages

When an error message appears on the display, follow the directions provided below.

Message	Cause/Remedy
請使用專用變壓器！	An incompatible AC adapter is connected. Use an appropriate AC adapter.
電池電量低！	The installed batteries are getting weak.
請更換電池！	The installed batteries are about to run out.
鋰電池請充電！	The battery is low. Please charge the lithium-ion battery.
鋰電池已受損請使用其他電源！	The Li-ion is damaged. Please use an AC adapter, AA size alkaline batteries (LR6) or AA size Ni-MH rechargeable batteries (HR6).
冷卻中重開機前請靜待 XX 分鐘！	High temperature error. Wait for the time stated in the message, and try again.
裁刀出錯！	The tape cutter was closed when you tried to print or feed tape. Turn the P-touch off and then on again before continuing. If tape is twisted in the cutter, remove the tape.
尚未安裝標籤色帶！	There is no tape cassette installed when you try to print or preview a label, or feed tape. Install a tape cassette before continuing.
超過最大允許字數！	The maximum number of characters have already been entered. Edit the text and use fewer characters.
資料未輸入！	There is no text, 符號 or bar code data entered when you try to print or preview a label. Enter data before continuing.
錯誤的數值！	The value entered for setting the tape length, multiple copies or the numbering function is invalid. Enter a valid value for the setting.
標籤色帶已被更換！	The tape cassette selected for printing is different from the tape cassette installed in the P-touch.
最多為 7 行！	The maximum number of lines have already been entered. Limit the number of lines to seven.
最多為 5 行！	There are more than five lines of text when you press the 列印 or 預覽 key while using 18 mm tape. Limit the number of lines to five, or replace with a larger width tape cassette.
最多為 3 行！	There are more than three lines of text when you press the 列印 or 預覽 key while using 12 mm tape. Limit the number of lines to three, or replace with a larger width tape cassette.
最多為 2 行！	There are more than two lines of text when you press the 列印 or 預覽 key while using 9 mm or 6 mm tape. Limit the number of lines to two, or replace with a larger width tape cassette.
最多為 1 行！	There is more than one line of text when you press the 列印 or 預覽 key while using 3.5 mm tape. Limit the number of lines to one, or replace with a larger width tape cassette.
已達段落極限！最多 99 個段落	Exceeded maximum block capacity. Limit the number of blocks to 99.
內容長度超過 xx 時無法列印！	The length of the label to be printed using the text entered is longer than 1 m. Edit the text so that the length of the label is less than 1 m.
請安裝 24 mm 標籤色帶！	A 24 mm tape cassette is not installed when Template or Block Layouts for 24 mm tape is selected. Install a 24 mm tape cassette.

Message	Cause/Remedy
請安裝 18 mm 標籤色帶！	A 18 mm tape cassette is not installed when Template or Block Layouts for 18 mm tape is selected. Install a 18 mm tape cassette.
請安裝 12 mm 標籤色帶！	A 12 mm tape cassette is not installed when Template or Block Layouts for 12 mm tape is selected. Install a 12 mm tape cassette.
請安裝 9 mm 標籤色帶！	A 9 mm tape cassette is not installed when Template or Block Layouts for 9 mm tape is selected. Install a 9 mm tape cassette.
請安裝 6 mm 標籤色帶！	A 6 mm tape cassette is not installed when Template or Block Layouts for 6 mm tape is selected. Install a 6 mm tape cassette.
請安裝 3.5 mm 標籤色帶！	A 3.5 mm tape cassette is not installed when Template or Block Layouts for 3.5 mm tape is selected. Install a 3.5 mm tape cassette.
插入 23.6 mm 熱縮套管卡匣！	A 23.6 mm Heat Shrink Tube is not installed when Template for 23.6 mm Heat Shrink Tube is selected. Install a 23.6 mm Heat Shrink Tube.
插入 17.7 mm 熱縮套管卡匣！	A 17.7 mm Heat Shrink Tube is not installed when Template for 17.7 mm Heat Shrink Tube is selected. Install a 17.7 mm Heat Shrink Tube.
插入 11.7 mm 熱縮套管卡匣！	A 11.7 mm Heat Shrink Tube is not installed when Template for 11.7 mm Heat Shrink Tube is selected. Install a 11.7 mm Heat Shrink Tube.
插入 8.8 mm 熱縮套管卡匣！	A 8.8 mm Heat Shrink Tube is not installed when Template for 8.8 mm Heat Shrink Tube is selected. Install a 8.8 mm Heat Shrink Tube.
插入 5.8 mm 熱縮套管卡匣！	A 5.8 mm Heat Shrink Tube is not installed when Template for 5.8 mm Heat Shrink Tube is selected. Install a 5.8 mm Heat Shrink Tube.
輸入的內容超過標籤長度設定！	The length of the label to be printed using the text entered is longer than the length setting. Edit the text to fit with in the set length or change the length setting.
記憶體已滿，無法儲存！	There is not enough internal memory available when you try to save a label file. Delete any unnecessary files to make more memory available for the new label file.
輸入的位數不足！	The number of digits entered in the bar code data does not match the number of digits set in the bar code parameters. Enter the correct number of digits.
首尾請輸入 A,B,C,或 D！	The bar code data entered does not have the required start/stop code (A, B, C, or D required at the beginning and end of the bar code data for the CODABAR protocol). Enter the bar code data correctly.
最多可輸入 5 個條碼	There are already five bar codes entered in the text data when you try to enter a new bar code. You can only use up to five bar codes in each label. You can enter up to two bar codes when  is selected in flag layout.
字體大小過大！	The text size is too large. Select a different size option.
系統錯誤 xx！	Please contact Brother customer service.
請更改兩端空白設定！	The tape length set using the tape length setting is shorter than the total length of the left and right margins applied for the “Large Margin” cutting option. You must select a different cutting option.
闔上蓋子！	The rear cover is open. Close the cover when printing.

1

2

3

4

5

6

7

8

9

Message	Cause/Remedy
色帶錯誤！	Tape that is incompatible with the P-touch has been installed. Use a compatible tape.
已達列印極限！每個色帶最多 297 行	Exceeds max. You can enter up to 297 lines in the whole page and blocks.
段落功能無法使用！	In this setting, you cannot add or delete blocks.
已達列印極限！最多 2 行	When using Self-Laminating Tape, you can print up to two lines.
已達列印極限！最多 3 行	PUNCH-DOWN BLOCK layout allows to print up to 3 lines/block.
此功能需要 9 mm 之標籤帶或更寬的色帶！	PUNCH-DOWN BLOCK layout must use 9mm or wider tape cassettes.
編輯時無法使用排序功能！	Text cannot be edited when you set Sequence Type in PUNCH-DOWN BLOCK to Horizontal or Backbone.
查無資料庫！	The 資料庫 key on the P-touch was pressed while there is no database file saved in the P-touch.
查無資料！	You tried to open a database file which doesn't contain any data.
條碼錯誤！	Bar code labels were attempted to print from a database. The P-touch will display this message when the selected range of the database includes invalid characters/numbers not supported by the bar code protocol.
記憶體已滿！縮減檔案尺寸以繼續	The total data size exceeds the built-in flash memory after editing database records.
此耗材不支援高畫質列印！	Cannot print labels in high resolution mode when non-supported media (fabric tape, heat shrink tube etc.) is installed in the P-touch.
查無此碼！	There is no conversion candidate. Please confirm the text inputted and transform again.

APPENDIX

Specifications

Main Unit

Item	Specification
Display	
Character display	15 characters x 2 lines and guidance area (128 dot x 64 dot)
Screen contrast	5 levels (+2, +1, 0, -1, -2)
Printing	
Print method	Thermal Transfer
Print head	128 dot/180 dpi High resolution mode: Maximum 180 dpi × 360 dpi (when connected to a computer) *1
Print height	18.0 mm max. (when using 24 mm tape) *2
Print speed	AC Adapter: Maximum 30 mm/sec. Batteries: Maximum 20 mm/sec. Actual print speed varies depending on the conditions.
Tape/Tube cassette *5	Brother TZe tape cassette (3.5 mm, 6 mm, 9 mm, 12 mm, 18 mm, 24 mm widths) Brother HSe tube cassette (5.8 mm, 8.8 mm, 11.7 mm, 17.7 mm, 23.6 mm widths)
No. of lines	24 mm tape: 1-7 lines; 18 mm tape: 1-5 lines; 12 mm tape: 1-3 lines; 9 mm tape: 1-2 lines; 6 mm tape: 1-2 lines; 3.5 mm tape: 1 line
Memory (標籤機檔案)	
Memory buffer size	Maximum 18,297 characters
File storage	Maximum 99 files
Memory (transferred)	
File storage	Maximum 99 templates, databases, and images each (total of 6 MB)
Power Supply	
Power supply	Six "AA" alkaline batteries (LR6) *3, Six "AA" Ni-MH rechargeable batteries (HR6) *3, *4, Li-ion Battery (BA-E001), AC adapter (AD-E001).
Auto Power-off	Six "AA" alkaline batteries (LR6)/Six "AA" Ni-MH rechargeable batteries (HR6): 20 min. Li-ion Battery (BA-E001): 30 min. AC adapter (AD-E001): 60 min. (Use the 設定 key to change the Auto Power-off setting for the Li-ion battery or AC adapter.)
Interface	
USB	Ver. 2.0 (Full Speed) (mini-B, Peripheral)
Wireless LAN	IEEE802.11b/g/n (Infrastructure Mode/Ad-hoc mode *6)

Item		Specification
Size		
	Dimensions	Approx. 125.8 mm (W) x 249.9 mm (D) x 94.1 mm (H)
	Weight	Approx. 1,048 g (without tape cassette and batteries)
Other		
	Operating temperature/humidity	10-35 °C/20-80% humidity (without condensation) Maximum wet bulb temperature: 27 °C

*1 The high resolution mode cannot be used with Fabric Tape and Heat Shrink Tube.

*2 Actual character size may be smaller than maximum print height.

*3 Not included.

*4 Visit us at support.brother.com for the latest information about recommended batteries.

*5 The available supplies may vary depending on the country or region.

*6 Not all computers, mobile devices, and operating systems, may support Ad-hoc mode.

Supported Protocols and Security Features


Interface	Wireless	IEEE 802.11b/g/n (Infrastructure Mode) IEEE 802.11b (Ad-hoc Mode)
Network (common)	Protocol (IPv4)	ARP, RARP, BOOTP, DHCP, APIPA (Auto IP), mDNS WINS, NetBIOS name resolution, DNS Resolver, LPR/LPD, Custom Raw Port/Port9100, FTP Server, TFTP client and server, ICMP, LLNMR responder, SNMPv1/v2c
	Protocol (IPv6)	NDP, RA, DNS Resolver, LPR/LPD, mDNS Custom Raw Port/Port9100, FTP Server, SNMPv1, TFTP client and server, ICMP, LLNMR responder, SNMPv1/v2c
Network (Security)	Wireless	SSID (32 chr), WEP 64/128 bit, WPA2-PSK (AES), LEAP, EAP-FAST, PEAP, EAP-TLS, EAP-TTLS

符號





[illegible]

符號

Category	符號
平假名	ああいいうええおおかがきぎくぐけげこご さざしじすずせぜそそただちちつつつてと どなにぬねのはばひびぴふぶぷへべぺほぼ ぽまみむめもややゆゆよよりりるれろわわゐ ゑをんづかけ
片假名	ァァィィウウエエオオカガキギクグケゲコゴ サザシジスズセゼソゾタダチヂッツツツテデト ドナニヌネノハバパヒビピフブプヘベペホボ ポマミムメモヤユヨヨラリルレロウワヰ ヱヲンヴカケ

 The 符號 shown in the table may look slightly different on the P-touch LCD and when printed.

Character Attribute

Attribute	Value	Result	Value	Result
英字形	HEL (Helsinki)	ABCabc	Tennessee	ABCabc
字大小	自動	When 自動 is selected, the text is automatically adjusted to print in the largest size available for each tape width.	51 pt	
	38 pt	ABCabc	13 pt	
	26 pt	ABCabc	10 pt	
	19 pt	ABCabc	6 pt	
字寬	x 2	ABCabc	x 2/3	ABCabc
	x 1	ABCabc	x 1/2	ABCabc
	x3/2	ABCabc		

1

2

3

4

5

6

7

8

9

Attribute	Value	Result	Value	Result
字體	標準	ABCabc	斜體	<i>ABCabc</i>
	粗體	ABCabc		
	中空	ABCabc		
	陰影	ABCabc		
	立體	ABCabc		
字距	標準	AA	較小	AA
底線	無	ABCabc	底線	<u>ABCabc</u>
	刪除線	ABCabc		
對齊	靠左	ABCabc	靠右	ABCabc
	置中	ABCabc	均分	A B C a b c



- The actual printed font size depends on the tape width, number of characters and number of input lines. Once characters reach a minimum size, the selected font will default to a custom font which is based on the Helsinki style. This allows labels to print using the smallest text possible on narrow or multi-line labels.
- All 6 point text is printed in Helsinki except in default setting.

外框

Attribute	Value	Result	Value	Result								
Frame	無	ABCabc	4	<div>ABCabc</div>								
	1	<div>ABCabc</div>	5	<div>ABCabc</div>								
	2	<div>ABCabc</div>	6	<div>ABCabc</div>								
	3	<div>ABCabc</div>	7	<table><tr><td>ABC</td><td>abc</td><td>ABC</td></tr><tr><td>ABC</td><td>abc</td><td>ABC</td></tr><tr><td>ABC</td><td>abc</td><td>ABC</td></tr></table>	ABC	abc	ABC	ABC	abc	ABC	ABC	abc
ABC	abc	ABC										
ABC	abc	ABC										
ABC	abc	ABC										

條碼

Bar Code Settings Table

Attribute	Value
規格	CODE39, CODE128, EAN-8, EAN-13, GS1-128 (UCC/EAN-128), UPC-A, UPC-E, I-2/5 (ITF), CODABAR
寬度	小
	大
底部文字 (characters printed below bar code)	有
	無
檢查碼 (check digit)	無
	有 (only available for the CODE39, I-2/5 and CODABAR protocols)

1

2

3

4

5

6

7

8

9

Special Character List

CODE39

Special Character
-
.
(SPACE)
\$
/
+
%

CODABAR

Special Character
-
\$
:
/
.
+

CODE128, GS1-128 (UCC/EAN-128)

Special Character	Special Character	Special Character
(SPACE)	\	DC3
!]	DC4
"	^	NAK
#	-	SYN
\$	NUL	ETB
%	.	CAN
&	SOH	EM
'	STX	SUB
(ETX	ESC
)	EOT	{
*	ENQ	FS
+	ACK	
,	BEL	GS
-	BS	}
.	HT	RS
/	LF	~
:	VT	US
;	FF	DEL
<	CR	FNC3
=	SO	FNC2
>	SI	FNC4
?.	DLE	FNC1
@	DC1	
[DC2	

Notes on Using P-touch Transfer Manager (For Windows)

Since some P-touch Editor functions are not available with the P-touch, keep the following points in mind when using P-touch Editor to create templates.

You can check a preview of the printed template before the created template is transferred to the P-touch. Refer to “Transferring the Label Template to P-touch Transfer Manager” on page 29 for details.

Notes on Creating Templates

- The P-touch is loaded with 14 fonts. Some of the text in the template that is transferred to the P-touch will be printed using similar fonts and character sizes that are loaded in the P-touch. As a result, the printed label may differ from the image of the template created in P-touch Editor.
- Depending on the text object setting, the character size may be automatically reduced or some of the text may not be printed. If this occurs, change the text object setting.
- Although character styles can be applied to individual characters with P-touch Editor, styles can only be applied to a block of text with the P-touch. In addition, some character styles are not available on the P-touch.
- A numbering field specified with P-touch Editor cannot be transferred.
- Backgrounds specified with P-touch Editor are not compatible with the P-touch.
- Date and Time objects using the “At Printing” setting on P-touch Editor will not be printed.
- A P-touch Editor layout that uses the split printing function (enlarging the label and printing it on 2 or more labels) cannot be transferred.
- Only the first seven lines of text typed into a database field is read by the P-touch.
- Fields that overflow print area may not print completely.

Notes on Transferring Templates

- The printed label may differ from the image that appears in the Preview area of P-touch Transfer Manager.
- If a bar code not loaded on the P-touch is transferred to the P-touch, the bar code will be converted into an image if it is a 2-dimensional bar code. The image of the converted bar code cannot be edited. If the bar code is a 1-dimensional bar code containing a bar code protocol not compatible with the P-touch, an error will occur and the template cannot be transferred.
- All transferred objects that cannot be edited by the P-touch are converted into images.
- Grouped objects will be converted into a single bitmap, from which the data cannot be edited with the P-touch keyboard.

Notes on Transferring Data Other Than Templates

- If the number or order of fields in a database are changed and only the database (*.csv file) is transferred to update it, the database may not link correctly with the template. In addition, the first line of data in the transferred file must be recognised by the P-touch as “field names”.
- Downloaded logos, 符號 and graphics into the P-touch will automatically be scaled (to 8 sizes) like the resident font or any of the resident symbol in the library.

1

2

3

4

5

6

7

8

9

brother