

Software Developer's Manual

ESC/P Brother Command Reference

PJ-722/723/762/763/763MFi/773

Version 1.00

The Brother logo is a registered trademark of Brother Industries, Ltd.

Brother is a registered trademark of Brother Industries, Ltd.

© 2015 Brother Industries, Ltd. All rights reserved.

BarStar Pro Encode Library (DataMatrix, MaxiCode, PDF417, RSS, CODE93, POSTNET, AZTEC, MSI)

Copyright (c) 2007 AINIX Corporation. All rights reserved.

QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries.

QR Code Generating Program Copyright © 2008 DENSO WAVE INCORPORATED

Each owner whose software title is mentioned in this document has a Software License Agreement specific to its proprietary programs.

Any trade names and product names of companies appearing on Brother products, related documents and any other materials are all trademarks or registered trademarks of those respective companies.

IMPORTANT - PLEASE READ CAREFULLY

Note

This documentation ("Documentation") provides information that will assist you in controlling your Printer PJ-7XX (where "7XX" is the model name).

You may use the Documentation only if you first agree to the following conditions.

If you do not agree to the following conditions, you may not use the Documentation.

Condition of Use

You may use and reproduce the Documentation to the extent necessary for your own use of your Printer Model ("Purpose"). Unless expressly permitted in the Documentation, you may not;

- (i) copy or reproduce the Documentation for any purpose other than the Purpose,
- (ii) modify, translate or adapt the Documentation, and/or redistribute it to any third party,
- (iii) rent or lease the Documentation to any third party, or,
- (iv) remove or alter any copyright notices or proprietary rights legends included within the Documentation.

No Warranty

- a. Any updates, upgrades or alteration of the Documentation or Printer Model will be performed at the sole discretion of Brother. Brother may not respond to any request or inquiry about the Documentation.
- b. THIS DOCUMENTATION IS PROVIDED TO YOU "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. BROTHER DOES NOT REPRESENT OR WARRANT THAT THIS DOCUMENTATION IS FREE FROM ERRORS OR DEFECTS.
- c. IN NO EVENT SHALL BROTHER BE LIABLE FOR ANY DIRECT, INDIRECT, PUNITIVE, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER, ARISING OUT OF THE USE, INABILITY TO USE, OR THE RESULTS OF USE OF THE DOCUMENTATION OR ANY SOFTWARE PROGRAM OR APPLICATION YOU DEVELOPED IN ACCORDANCE WITH THE DOCUMENTATION.

Contents

Introduction	1
What is ESC/P?.....	2
1. Using ESC/P Brother Commands	3
2. Examples of Using ESC/P Brother Commands	5
3. ESC/P Command Limitations.....	11
3.1 Print area.....	11
3.2 Characters.....	12
3.2.1 Character sizes.....	12
3.2.2 Character pitches	13
3.3 Print position.....	14
3.3.1 Characters.....	14
3.3.2 Bitmaps, barcodes and downloaded images	14
3.4 Line feed amount.....	15
4. Control Code List	16
5. Control Command Details	20
5.1 Character/style selection commands.....	20
ESC R Select international character set	20
ESC q Select character style	21
ESC k Select font.....	22
ESC t Select character code set	22
5.2 Text printing commands.....	23
ESC 4 Apply italic style	23
ESC 5 Cancel italic style	23
ESC E Apply bold style	24
ESC F Cancel bold style	24
ESC G Apply double-strike printing	25
ESC H Cancel double-strike printing	25
ESC P Apply pica pitch (10 cpi).....	26
ESC M Apply elite pitch (12 cpi).....	27
ESC g Apply micron pitch (15 cpi)	28
ESC p Specify proportional characters	29
ESC W Specify double-width characters	29
SO Specify auto-canceling stretched characters	30
ESC SO Specify auto-canceling stretched characters	30
SI Specify compressed characters.....	31
ESC SI Specify compressed characters.....	31
DC2 Cancel compressed characters	32
DC4 Cancel auto-canceling double-width characters	32
ESC – Apply/cancel underlining.....	33
ESC ! Global formatting	34
ESC SP Specify character spacing.....	35
ESC X Specify character size.....	36
5.3 Line feed commands	37
ESC 0 Specify line feed of 1/8 inch	37
ESC 2 Specify line feed of 1/6 inch	37
ESC 3 Specify minimum line feed	38
ESC A Specify line feed of n/60 inch	38
5.4 Horizontal movement commands	39
ESC I Specify left margin	39
ESC Q Specify right margin	41

CR	Carriage return	42
ESC D	Specify horizontal tab position	43
HT	Perform horizontal tab	44
ESC \$	Specify absolute horizontal position	45
ESC \	Specify relative horizontal position	45
ESC a	Specify alignment	46
5.5	Vertical movement commands	47
LF	Line feed	47
FF	Page feed	47
ESC J	Forward paper feed	48
ESC B	Specify vertical tab position	49
VT	Perform vertical tab	50
ESC (V	Specify absolute vertical position	51
ESC (v	Specify relative vertical position	52
5.6	Paper formatting commands	53
ESC (c	Specify page format	53
ESC (C	Specify page length	54
5.7	Printer control commands	56
ESC @	Initialize	56
5.8	Graphics commands	57
ESC *	Select bit image <for 203dpi printers>	57
ESC *	Select bit image <for 300dpi printers>	61
ESC K	8-bit single-density bit image	67
ESC L	8-bit double-density bit image	67
ESC Y	8-bit double-speed double-density bit image	68
ESC Z	8-bit quadruple-density bit image	68
5.9	Advanced commands	69
ESC i B	Barcode	69
ESC i Q	2D barcode (QR Code)	73
ESC i P	Specify QR Code version	76
ESC i V	2D barcode (PDF417)	77
ESC i D	2D barcode (DataMatrix)	80
ESC i M	2D barcode (MaxiCode)	83
ESC i J	2D barcode (Aztec)	85
ESC i G	Specify font setting	87
ESC i F	Print downloaded data	88
ESC i a	Switch command mode	92
ESC i S	Status information request	93
ESC i L	Specify landscape orientation	95
5.10	Advanced static commands	96
ESC iXQ2	Select default character style	96
ESC iXQ1	Retrieve default character style	97
ESC iXk2	Select default font	98
ESC iXk1	Retrieve default font	99
ESC iXX2	Specify default character size	100
ESC iXX1	Retrieve default character size	101
ESC iX32	Specify default line feed	101
ESC iX31	Retrieve default line feed	102
ESC iXA2	Select default alignment	102
ESC iXA1	Retrieve default alignment	103
ESC iX(2	Specify default page length	104
ESC iX(1	Retrieve default page length	104
ESC iXL2	Select default landscape orientation	105
ESC iXL1	Retrieve default landscape orientation	105
ESC iXj2	Select default international character set	106

ESC iXj1	Retrieve default international character set	107
ESC iXm2	Select default character code set	108
ESC iXm1	Retrieve default character code set	108
ESC iXE2	Specify barcode margin setting.....	109
ESC iXE1	Retrieve barcode margin setting	109
Appendix A: Character Code Tables		110
Character code tables		110
International character set table		114
Appendix B: Introducing the Brother Developer Center		115

Introduction

This material provides the necessary information for directly controlling PJ-7XX.

This information is provided assuming that the user has full understanding of the operating system being used and basic mastery of communication interfaces in a developer's environment.

Read the model names that appear in the screens in this manual as the name of your printer.

We accept no responsibility for any problems caused by programs that you develop using the information provided in this material, affecting software, data or hardware, including the PJ-7XX, and any problems resulting directly or indirectly from them. Use this material only if you accept these terms.

This material shall not be reproduced, in part or in full, without prior approval. In addition, this material shall not be used as evidence in a lawsuit or dispute in a way that is unfavorable towards our company.

These ESC/P Brother commands have been adapted specifically for this company.

What is ESC/P?

ESC/P is one type of control codes used for printers. With the codes introduced in this document, various documents can be created and printed. In this document, ESC/P codes are provided as both ASCII and binary codes.

When sending codes to the printer, make sure that the binary codes are used, otherwise the printer cannot parse the codes.

1. Using ESC/P Brother Commands

Below is a description of the flow for creating documents.

Also refer to "[2. Examples of Using ESC/P Brother Commands](#)".

(1) Start ESC/P

- | | |
|-----------------------------|--|
| 1. Switch the command mode. | - Switch command mode (ESC i a 4) Note: ESC/P Brother mode |
| 2. Initialize | - Initialize (ESC @) |



(2) Format settings

- | | |
|----------------------------------|--|
| 1. Select the orientation. | - Specify landscape orientation (ESC i L) |
| 2. Specify the page size. | - Specify page length (ESC (C) |
| 3. Specify print area. | - Specify page format (ESC (c)
- Specify left/right margins (ESC I, ESC Q) |
| 4. Specify the line feed amount. | - Specify line feed amount (ESC 0, ESC 2, ESC 3, ESC A) |
| 5. Specify tab positions. | - Specify horizontal tab position (ESC D)
- Specify vertical tab position (ESC B) |



(3) Print operations

- | | |
|--|---|
| 1. Specify the print position. | - Specify the vertical position (ESC (v, ESC (V, VT, ESC J)
- Specify the horizontal position (ESC \$, ESC \, HT, ESC a) |
| 2. Transfer the print data (one line). | - Transfer necessary text operation codes (see (4)), bit images, barcodes, and downloaded data (see (5)) |
| 3. End of the line. | - Feed the paper (CR, LF) |
| 4. Repeat 1–3 above. | |
| 5. End of the page. | - Feed the page (FF) |
| 6. Repeat 1–5 above. | |
| 7. End of the document. | |

(4) Text operations

1. Specify the character set.
 - Select font (ESC k)
 - Select character code (ESC t)
 - Select international character set (ESC R)
 - Specify character size (ESC X)
 - Specify the character spacing (ESC P, ESC M, ESC SP)
 2. Specify the character style.
 - Specify character style
(ESC 4, ESC 5, ESC E, ESC F, ESC G, ESC H, ESC W, SO,
ESC SO, SI, ESC SI, DC2, DC4, ESC -, ESC !)
 3. Specify character codes.
- Repeat 1–3 above as necessary.

(5) Bit images, barcodes, and image data

1. Specify bit images.
 - (ESC *, ESC K, ESC L, ESC Y, ESC Z)
2. Specify barcodes.
 - (ESC i B)
3. Specify 2D barcodes.
 - (ESC i Q, ESC i V, ESC i D, ESC i M, ESC i J)
4. Print the downloaded data
 - (ESC i F)

An image data has to be transferred and registered to the printer first.

2. Examples of Using ESC/P Brother Commands

Set Basic setup first.

Basic set up : Specify ESC/P Brother command mode

ESC i a Switch command mode

ASCII:	ESC	i	a	n
Decimal:	27	105	97	n
Hexadecimal:	1B	69	61	n

Parameters

- n: Command mode
 0 or 48: ESC/P Legacy / Raster mode
 3 or 51: P-touch Template mode
 4 or 52 ESC/P Brother mode


Description

- Switches the command mode to ESC/P Legacy / Raster mode, P-touch Template mode and ESC/P Brother mode.
- Dynamically switches between the 3 modes.
- Since this is a dynamic command, after the printer is turned off and on again, the setting returns to the previously setting.

Entered Command

ESC i a 04h

This is the document that will be made.

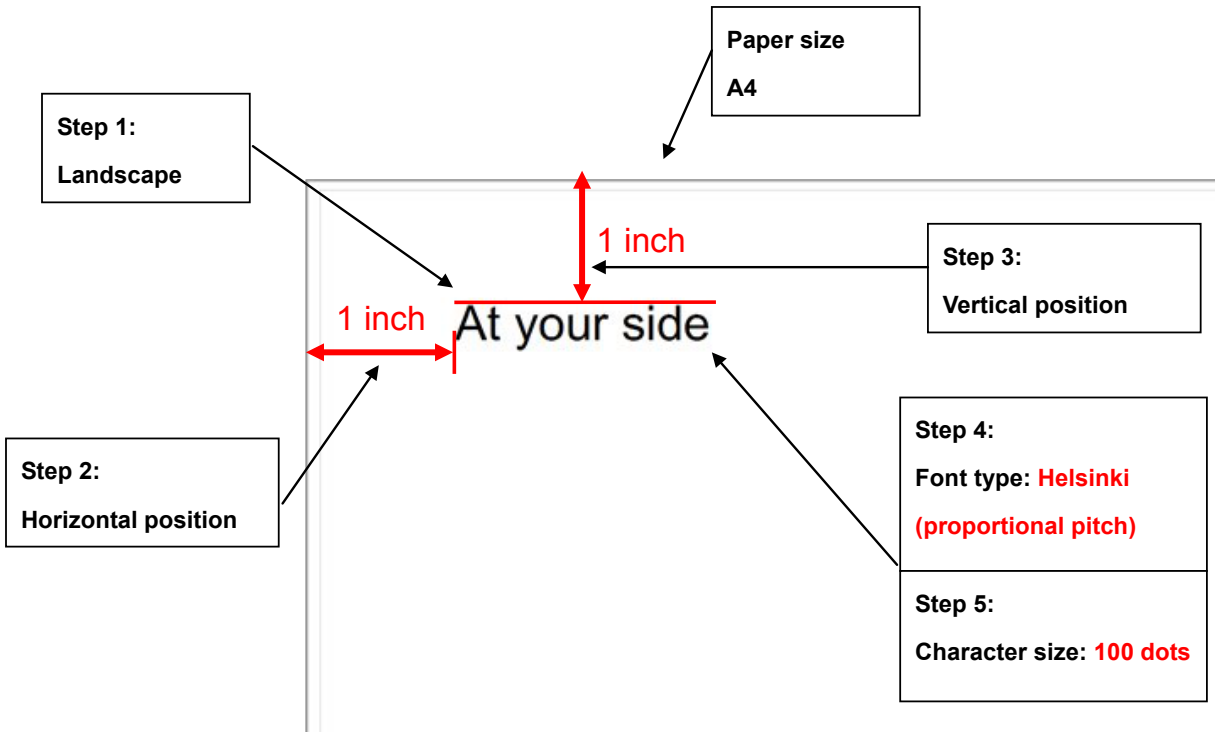

In order to make this document, the following six steps are required.

Step 1: Select the landscape orientation.

ESC i L Specify landscape orientation

ASCII:	ESC	i	L	n
Decimal:	27	105	76	n
Hexadecimal:	1B	69	4C	n

Parameters

n=0, 1 or 48, 49

Description

- Applies or cancels the landscape orientation.
 - n=1 or 49 ("1"): Applies the landscape orientation.
 - n=0 or 48 ("0"): Cancels the landscape orientation.
- Using this command clears all text.
- Before entering text, specify the paper orientation with this command.
- When the printer is turned on, the landscape orientation is canceled.


Entered command

ESC i L 01h

Step 2: Specify the horizontal position.

ESC \$ Specify absolute horizontal position

ASCII:	ESC	\$	n1	n2
Decimal:	27	36	n1	n2
Hexadecimal:	1B	24	n1	n2

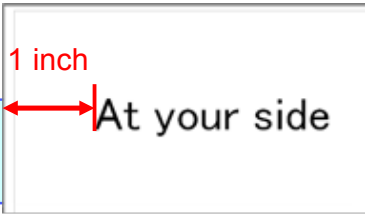

Parameters

0≤n1≤255, 0≤n2≤255

Description

- Specifies the absolute print position (in dots) for the next data.
- An absolute print position specifies the next print position as a number of dots from the left margin.
- n1 and n2 indicate the number of dots from the left margin.
(Number of dots=n1+n2*256)
- The dot spacing is calculated as 1/203 inch.
- The maximum number of dots that can be specified with n1 and n2 depends on the media.
- This command is available only with left alignment.

1 inch=203 dots

Horizontal position=n1+n2*256=203

|| ||
203 0
|| ||
CBh 00h

Entered command nL nH

ESC \$	CBh	00h
--------	-----	-----

Example: A case 203dpi printer is used

Step 3: Specify the vertical position.**ESC (V Specify absolute vertical position**

ASCII:	ESC	(V	nL	nH	mL	mH
Decimal:	27	40	86	nL	nH	mL	mH
Hexadecimal:	1B	28	56	nL	nH	mL	mH

Parameters

nL=2
 nH=0
 0≤mL≤255
 0≤mH≤127

Description

- Specifies the vertical print position as an absolute position from the top margin position.
- Vertical position=mL+mH*256+top margin
- The absolute vertical position is measured from the top margin position when this command was specified.
- If a position extending beyond the bottom margin is specified, printing starts.
- There is no restriction on the amount of movement back (upward) from the current position.
- With left alignment, the print position for the next line becomes the end position of the current line.
 (The horizontal position does not move to the left margin.)
- With right alignment and center alignment, the horizontal position moves to the beginning of the line.
- Auto-canceling double-width characters specified with SO or ESC SO are canceled.


1 inch=203 dots**Vertical position=n1+n2*256=203**

109	0
CBh	00h

Entered command nL nH mL mH

ESC (V 02h 00h CBh 00h

Example: A case 203dpi printer is used

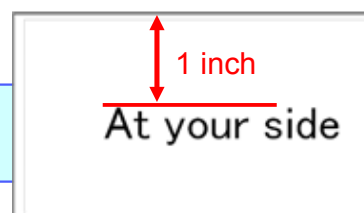**Step 4: Select the font type.****ESC k Select font**

ASCII:	ESC	k	n
Decimal:	27	107	n
Hexadecimal:	1B	6B	n

Parameters

1≤n≤3, 9≤n≤11

Description

- Selects the font.

Bitmap Fonts		Outline Fonts	
n=1	Letter Gothic Bold (fixed pitch)	n=9	Letter Gothic Bold (fixed pitch)
n=2	Brussels (proportional pitch)	n=10	Brussels (proportional pitch)
n=3	Helsinki (proportional pitch)	n=11	Helsinki (proportional pitch)

- The default value is n=1 (Letter Gothic Bold (fixed pitch)).
- If the font is changed from a bitmap font to outline font, the character size is changed to the default setting (28 dots).
- If the font is changed from an outline font to bitmap font, the character size is changed to default setting (32 dots).

n=11=0Bh**Entered command** n

ESC k 0Bh



Step 5: Specify the character size.

ESC X Specify character size

ASCII:	ESC	X	m	nL	nH
Decimal:	27	88	m	nL	nH
Hexadecimal:	1B	58	m	nL	nH

Parameters

Character width:	The value of m is irrelevant.				
Character size:	<Bitmap fonts> Valid only with: nL=24, 32, 48 dots nH=0		<Outline fonts> The maximum is: nL=144 nH=1		

At your side

Character size: **100 dots**

Description

- This command is used only to change the size.
- Outline must not be specified.
- The character width cannot be specified.
- The character size is specified as $n=nL+nH*256$ dots.
- With bitmap fonts, only n=24, 32 and 48 are valid.
- With outline fonts, n=400 is the maximum.
- The commands for specifying stretched characters, compressed characters and the character spacing (SO, ESC W, ESC I, ESC SP) remain available.


Character size= $n1+n2*256=100$ dots

100	0
64h	00h

Entered command	m	nL	nH
ESC X	00h	64h	00h

Example: A case 203dpi printer is used


All commands together will make the example document shown below.

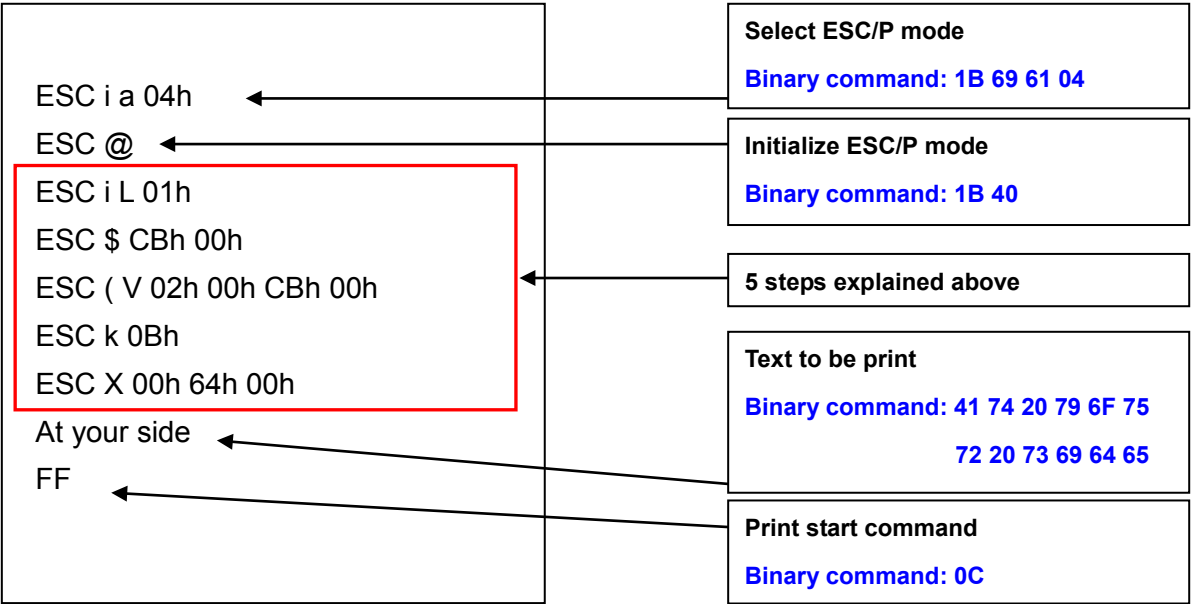

However, these commands should be converted to binary data before sent to the printer, as shown below.
Here is the captured converted binary data.

```
1B 69 61 04 1B 40 1B 69 4C 01 1B 24 CB 00 1B 28  
56 02 00 CB 00 1B 6B 0B 1B 58 00 64 00 41 74 20  
79 6F 75 72 20 73 69 64 65 0C
```

When the printer receives above binary commands, the document shown below is printed.

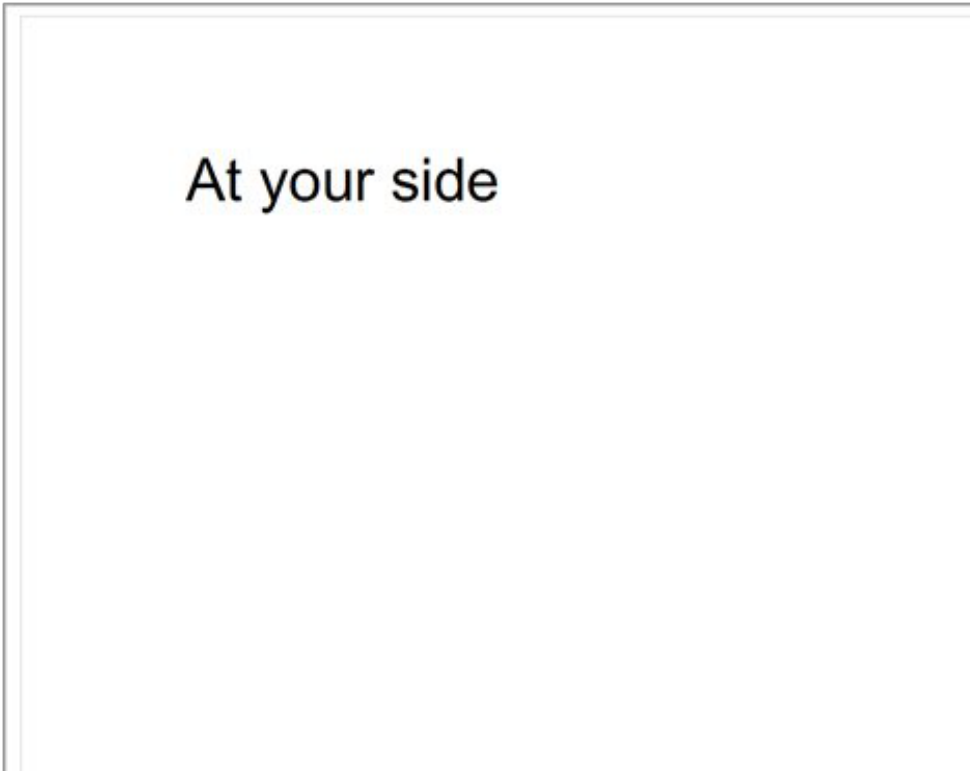

3. ESC/P Command Limitations

3.1 Print area


[Paper types and sizes]

- Thermal cut paper: A4/Letter/Legal/A5/A5(Long Edge) sizes and any size
- Thermal roll paper: 210 mm (width)

* Any size is within a range of 101.6- to 215.9-mm wide and 50.8- to 1000.0-mm long.

[Print area]

The printable area differs depending on the paper type; however, with any paper listed above, the top margin, left margin and page width of the print area are the same as with A4 paper. If the page length (8-inch page width) has been specified, the length specified with ESC/P will be applied as the page length.

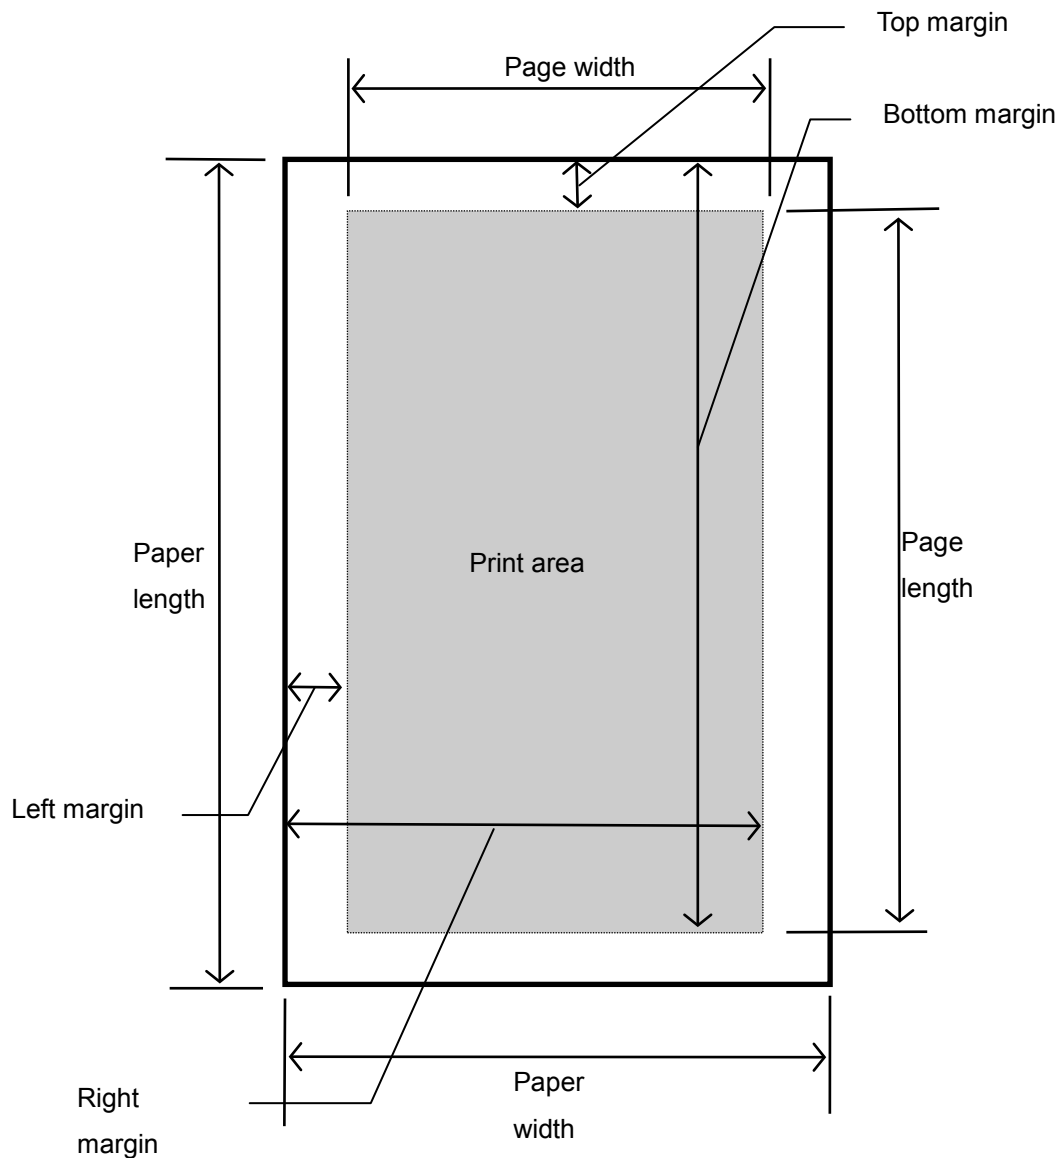

3.2 Characters

This system uses single-byte character codes and is installed with 3 bitmap fonts (Letter Gothic Bold and Helsinki) and 3 outline fonts (Brussels and Helsinki).

Fixed pitch or proportional pitch can be specified for any of the fonts.

However, there are fonts that are better with a fixed pitch and fonts that are better with a proportional pitch.


The fonts that are better with a fixed pitch are: Letter Gothic Bold.

The font that is better with a proportional pitch are: Brussels, Helsinki.

Each bitmap font has three sizes: 24 dots, 32 dots, and 48 dots.

3.2.1 Character sizes

Each font is available in full size, compressed size (half width), double width, double height and half width, double height, and quadruple size.

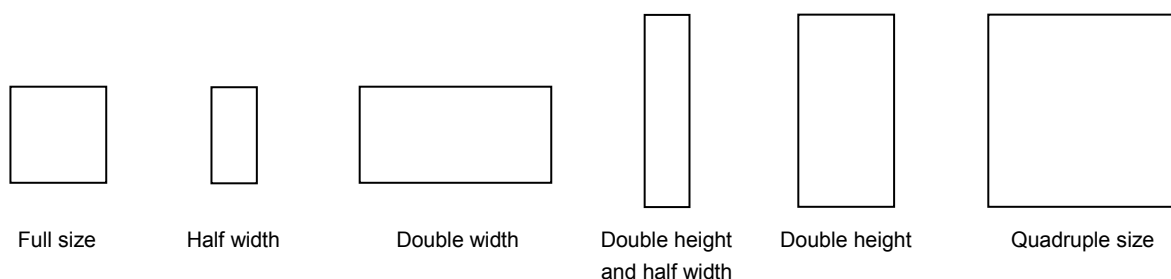

The actual character size is slightly smaller than the nominal size (the parameter value received with the size command). This varies depending on the font.

Nominal (dots)	24	32	48
Height (dots)	21	28	44
Width (dots)	11	16	26

The above example is for Letter Gothic Bold (full size, no character styles applied).

The line-drawing characters (┌ ┐ └ ┘ ┐ ┌ ┘ └ , etc.) and shaded characters have their own pitch regardless of the specified font and pitch (proportional or fixed) settings.

3.2.2 Character pitches

Pitch refers to the spacing between neighboring characters.

When characters are arranged with a fixed pitch, they will be evenly spaced.

If characters extend over several lines, they will align in straight rows.




When characters are arranged with a proportional pitch, the spacing will vary depending on the character.

(For example, “W” is wide but “I” is narrow.)

As a result, the excess space between characters is eliminated and the text appears more compact.



If a fixed pitch is applied to a font that is better with a proportional pitch, all characters are given the same width as the widest character in the font.

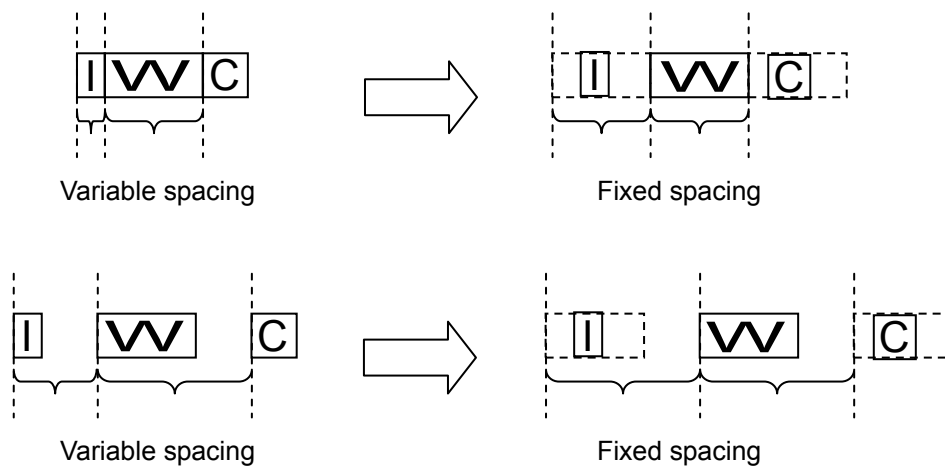

This makes it possible to evenly space the characters of a proportional-pitch font without having to change the font.

If a proportional pitch is applied to a font that is better with a fixed pitch, all characters are given the same width, appearing the same as with a fixed pitch.

3.3 Print position


The print position is the standard position for printing characters, bitmaps, and barcodes.

There is a horizontal print position and vertical print position, which are the reference points for vertical position movement and horizontal position movement.

3.3.1 Characters


Characters are arranged with their top edges aligned with the print position.

The baseline of each character is the bottom edge of the character, regardless of size, font, etc.

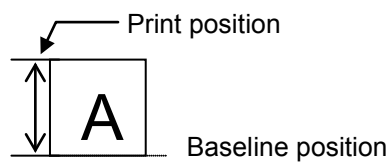

All characters on a single line are printed with a baseline positions that is the same for each character.

If a single line consists of characters with different heights, the characters are aligned with the baseline of the tallest character on the line.

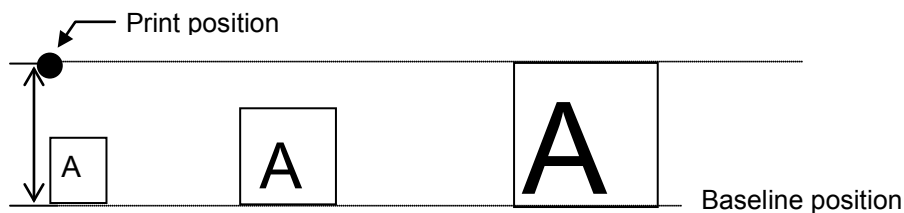


Underlines are drawn 4 dots below the baseline position.

3.3.2 Bitmaps, barcodes and downloaded images

These types of image data are treated in the same way as characters and are printed with the bottom edge of the image aligned with the baseline.

3.4 Line feed amount

The amount of line feed is the amount of vertical movement from the print position of one line to the print position of the next line.

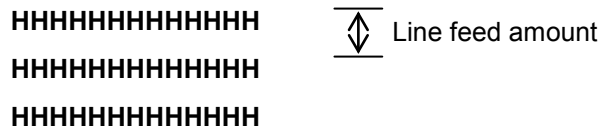

The line feed amount is specified with ESC 0, ESC 2, ESC A, and ESC 3.

- Within a single line of text, the tallest character is determined, and the baseline is moved so that the top edge of that character is at the vertical print position.
- The tallest character within a line becomes the line height.
- If characters are underlined, 4 dots are added to the line height.
- If the line height is greater than the specified line feed amount, the line height is used as the actual line feed amount.

In this way, even if the specified line feed amount is small, the upper and lower lines will not overlap.

4. Control Code List

Character/style selection commands (Refer to section [5.1 Character/style selection commands.](#))

ASCII Code	Binary Code	Description
ESC R	1B 52	Select international character set
ESC q	1B 71	Select character style
ESC k	1B 6B	Select font
ESC t	1B 74	Select character code set

Text printing commands (Refer to section [5.2 Text printing commands.](#))

ASCII Code	Binary Code	Description
ESC 4	1B 34	Apply italic style
ESC 5	1B 35	Cancel italic style
ESC E	1B 45	Apply bold style
ESC F	1B 46	Cancel bold style
ESC G	1B 47	Apply double-strike printing
ESC H	1B 48	Cancel double-strike printing
ESC P	1B 50	Apply pica pitch (10 cpi)
ESC M	1B 4D	Apply elite pitch (12 cpi)
ESC g	1B 67	Apply micron pitch (15 cpi)
ESC p	1B 70	Specify proportional characters
ESC W	1B 57	Specify double-width characters
SO	0E	Specify auto-canceling stretched characters
ESC SO	1B 0E	Specify auto-canceling stretched characters
SI	0F	Specify compressed characters
ESC SI	1B 0F	Specify compressed characters
DC2	12	Cancel compressed characters
DC4	14	Cancel auto-canceling double-width characters
ESC -	1B 2D	Apply/cancel underlining
ESC !	1B 21	Global formatting
ESC SP	1B 20	Specify character spacing
ESC X	1B 58	Specify character size

Line feed commands (Refer to section [5.3 Line feed commands.](#))

ASCII Code	Binary Code	Description
ESC 0	1B 30	Specify line feed of 1/8 inch
ESC 2	1B 32	Specify line feed of 1/6 inch
ESC 3	1B 33	Specify minimum line feed
ESC A	1B 41	Specify line feed of n/60 inch

Horizontal movement commands (Refer to section [5.4 Horizontal movement commands.](#))

ASCII Code	Binary Code	Description
ESC I	1B 6C	Specify left margin
ESC Q	1B 51	Specify right margin
CR	0D	Carriage return
ESC D	1B 44	Specify horizontal tab position
HT	09	Perform horizontal tab
ESC \$	1B 24	Specify absolute horizontal position
ESC \	1B 5C	Specify relative horizontal position
ESC a	1B 61	Specify alignment

Vertical movement commands (Refer to section [5.5 Vertical movement commands.](#))

ASCII Code	Binary Code	Description
LF	0A	Line feed
FF	0C	Page feed
ESC J	1B 4A	Forward paper feed
ESC B	1B 42	Specify vertical tab position
VT	0B	Perform vertical tab
ESC (V	1B 28 56	Specify absolute vertical position
ESC (v	1B 28 76	Specify relative vertical position

Paper formatting commands (Refer to section [5.6 Paper formatting commands.](#))

ASCII Code	Binary Code	Description
ESC (c	1B 28 63	Specify page format
ESC (C	1B 28 43	Specify page length

Printer control commands (Refer to section [5.7 Printer control commands.](#))

ASCII Code	Binary Code	Description
ESC @	1B 40	Initialize (defaults)

Graphics commands (Refer to section [5.8 Graphics commands.](#))

ASCII Code	Binary Code	Description
ESC *	1B 2A	Select bit image.
ESC K	1B 4B	8-bit single-density bit image
ESC L	1B 4C	8-bit double-density bit image
ESC Y	1B 59	8-bit double-speed double-density bit image
ESC Z	1B 5A	8-bit quadruple-density bit image

Advanced commands (Refer to section [5.9 Advanced commands.](#))

ASCII Code	Binary Code	Description
ESC i B	1B 69 42	Barcode
ESC i Q	1B 69 51	2D barcode (QR Code)
ESC i P	1B 69 50	Specify QR Code version
ESC i V	1B 69 56	2D barcode (PDF417)
ESC i D	1B 69 44	2D barcode (DataMatrix)
ESC i M	1B 69 4D	2D barcode (MaxiCode)
ESC i J	1B 69 4A	2D barcode (Aztec)
ESC i G	1B 69 47	Specify font setting
ESC i F	1B 69 46	Print downloaded data
ESC i a	1B 69 61	Switch command mode
ESC i S	1B 69 53	Status information request
ESC i L	1B 69 4C	Specify landscape orientation

Advanced static commands (Refer to section [5.10 Advanced static commands.](#))

ASCII Code	Binary Code	Description
ESC iXQ2	1B 69 58 51 32	Select default character style
ESC iXQ1	1B 69 58 51 31	Retrieve default character style
ESC iXk2	1B 69 58 6B 32	Select default font
ESC iXk1	1B 69 58 6B 31	Retrieve default font
ESC iXX2	1B 69 58 58 32	Specify default character size
ESC iXX1	1B 69 58 58 31	Retrieve default character size
ESC iX32	1B 69 58 33 32	Specify default line feed
ESC iX31	1B 69 58 33 31	Retrieve default line feed
ESC iXA2	1B 69 58 41 32	Select default alignment
ESC iXA1	1B 69 58 41 31	Retrieve default alignment
ESC iX(2	1B 69 58 28 32	Specify default page length
ESC iX(1	1B 69 58 28 31	Retrieve default page length
ESC iXL2	1B 69 58 4C 32	Select default landscape orientation
ESC iXL1	1B 69 58 4C 31	Retrieve default landscape orientation
ESC iXj2	1B 69 58 6A 32	Select default international character set
ESC iXj1	1B 69 58 6A 31	Retrieve default international character set
ESC iXm2	1B 69 58 6D 32	Select default character code set
ESC iXm1	1B 69 58 6D 31	Retrieve default character code set
ESC iXE2	1B 69 58 45 32	Specify barcode margin setting
ESC iXE1	1B 69 58 45 31	Retrieve barcode margin setting

5. Control Command Details

5.1 Character/style selection commands

ESC R Select international character set

ASCII:	ESC	R	n
Decimal:	27	82	n
Hexadecimal:	1B	52	n

Parameters

0≤n≤13, 64

Description

- Selects the character set, and switches some of the character codes in the code table according to the value of n.
 - n=0: U.S.A.
 - n=1: France
 - n=2: Germany
 - n=3: U.K.
 - n=4: Denmark I
 - n=5: Sweden
 - n=6: Italy
 - n=7: Spain I
 - n=8: Japan
 - n=9: Norway
 - n=10: Denmark II
 - n=11: Spain II
 - n=12: Latin America
 - n=13: South Korea
 - n=64: Legal
- The following 12 codes are switched.
 - 23h, 24h, 40h, 5Bh, 5Ch, 5Dh, 5Eh, 60h, 7Bh, 7Ch, 7Dh, 7Eh
- The default setting is n=0 (U.S.A.)

Example

Code: 5Ch ESC R 08h 5Ch FF
 Print result: \ ¥

ESC q Select character style

ASCII:	ESC	q	n
Decimal:	27	113	n
Hexadecimal:	1B	71	n

Parameters
 $0 \leq n \leq 3$
Description

- Selects the character style.
 - n=0: None (normal characters)
 - n=1: Outline
 - n=2: Shadow
 - n=3: Shadow and outline

Example

Code: ABC ESC q 02h ABC ESC q 00h ABC FF
 Print result: ABCABCABC

ESC k Select font

ASCII:	ESC	k	n
Decimal:	27	107	n
Hexadecimal:	1B	6B	n

Parameters
 $1 \leq n \leq 3, 9 \leq n \leq 11$
Description

- Selects the font.

Bitmap Fonts		Outline Fonts	
n=1	Letter Gothic Bold (fixed pitch)	n=9	Letter Gothic Bold (fixed pitch)
n=2	Brussels (proportional pitch)	n=10	Brussels (proportional pitch)
n=3	Helsinki (proportional pitch)	n=11	Helsinki (proportional pitch)

- The default value is n=1 (Letter Gothic Bold (fixed pitch)).
- If the font is changed from a bitmap font to outline font, the character size is changed to the default setting (28 dots).
- If the font is changed from an outline font to bitmap font, the character size is changed to default setting (32 dots).

ESC t Select character code set

ASCII:	ESC	t	n
Decimal:	27	116	n
Hexadecimal:	1B	74	n

Parameters
 $0 \leq n \leq 3, 12$
Description

- From the four built-in character code sets, selects the character code set used.
 - n=0: Standard character code set
 - n=1: Eastern European character code set
 - n=2: Western European character code set
 - n=3: Reserved
 - n=12: Cyrillic character code set
- The default setting is n=0.

5.2 Text printing commands

ESC 4 Apply italic style

ASCII:	ESC	4
Decimal:	27	52
Hexadecimal:	1B	34

Parameters

None

Description

- Prints the subsequent text in italics.
- This command is valid anywhere in a text line.

ESC 5 Cancel italic style

ASCII:	ESC	5
Decimal:	27	53
Hexadecimal:	1B	35

Parameters

None

Description

- Cancels the italic character style.
- This command is valid anywhere in a text line.

Example

Code: ABC ESC 4 DEF ESC 5 GHI FF
 Print result: *ABC*DEF*GH*I

ESC E Apply bold style

ASCII:	ESC	E
Decimal:	27	69
Hexadecimal:	1B	45

Parameters

None

Description

- Prints the subsequent text in bold.
- This command is valid anywhere in a text line.

ESC F Cancel bold style

ASCII:	ESC	F
Decimal:	27	70
Hexadecimal:	1B	46

Parameters

None

Description

- Cancels the bold style.
- This command is valid anywhere in a text line.

Example

Code: ABC ESC E DEF ESC F GHI FF
 Print result: ABC**DE**FGHI

ESC G Apply double-strike printing

ASCII:	ESC	G
Decimal:	27	71
Hexadecimal:	1B	47

Parameters

None

Description

- Prints the subsequent text in bold.
- This command is valid anywhere in a text line.

ESC H Cancel double-strike printing

ASCII:	ESC	H
Decimal:	27	72
Hexadecimal:	1B	48

Parameters

None

Description

- Cancels the bold style.
- This command is valid anywhere in a text line.

Example

Code:	ABC ESC G DEF ESC H GHI FF
Print result:	ABC DE FGHI

ESC P Apply pica pitch (10 cpi)

ASCII:	ESC	P
Decimal:	27	80
Hexadecimal:	1B	50

Parameters

None

Description

- Prints the subsequent text with the pica pitch (10 characters/inch).
- The character spacing is 20 dots (30 dots for 300dpi printers).
- If the character width is 20(or 30) dots or less, the character spacing is specified as 20(or 30) minus the character width.
- If the character width exceeds 20(or 30) dots, the character spacing is specified as the character width.
(The spacing between characters is 0 dot.)

In this case, the pitch does not exactly equal the pica pitch.


- With double-width characters, the character spacing is doubled (40(or 60) dots).
- With half-width characters, the character spacing is halved (10(or 15) dots).
- When the character spacing is changed with ESC SP, the setting is updated.
- This command is invalid when proportional pitch is selected.
- In outline fonts, the spacing between characters is 0 dot.

Setting (dots)		Full Width			Double Width			Half Width		
		24	32	48	24	32	48	24	32	48
Width (dots)	Letter Gothic Bold	11	16	26	22	32	52	6	8	13
	Brussels	25	35	56	50	70	112	13	18	28
	Helsinki	21	28	44	42	56	88	11	14	22

The above table refers to characters with a fixed pitch. (Applying styles may increase the size.)

Example

For a 15-dot font at full width:

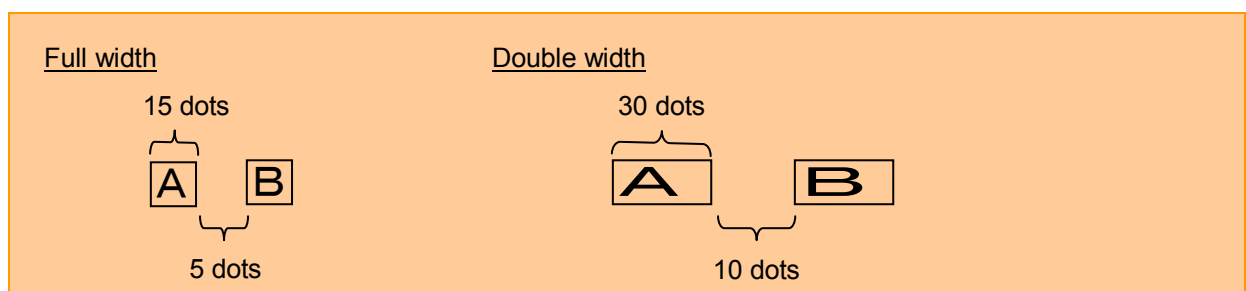

ESC M Apply elite pitch (12 cpi)

ASCII:	ESC	M
Decimal:	27	77
Hexadecimal:	1B	4D

Parameters

None

Description


- Prints the subsequent text with the elite pitch (12 characters/inch).
- The character spacing is 16 dots (25 dots for 300dpi printers).
- If the character width is 16(or 25) dots or less, the character spacing is specified as 16(or 25) minus the character width.
- If the character width exceeds 16(or 25) dots, the character spacing is specified as the character width.
(The spacing between characters is 0 dot.)

In this case, the pitch does not exactly equal the elite pitch.

- With double-width characters, the character spacing is doubled (32(or 50) dots).
- With half-width characters, the character spacing is halved (8(or 13) dots).
- When the character spacing is changed with ESC SP, the setting is updated.
- This command is invalid when proportional pitch is selected.
- In outline fonts, the spacing between characters is 0 dot.

Example

For a 15-dot font at full width:

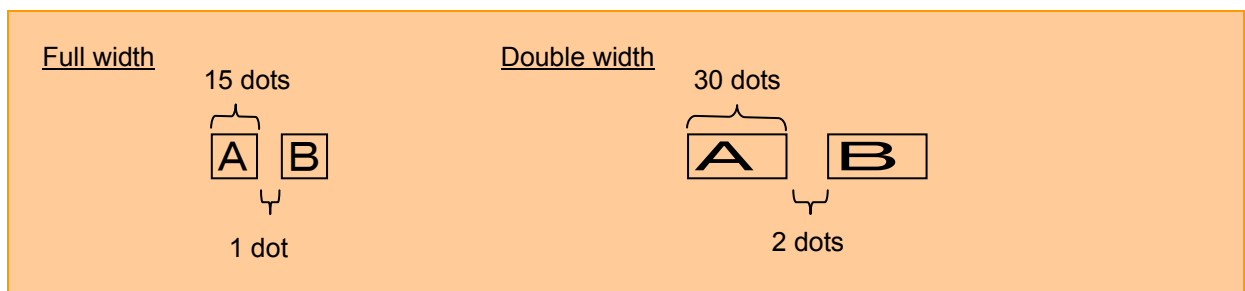

ESC g Apply micron pitch (15 cpi)

ASCII:	ESC	g
Decimal:	27	103
Hexadecimal:	1B	67

Parameters

None

Description


- Prints the subsequent text with the elite pitch (15 characters/inch).
- This command is not applied to 203dpi printers.
- The character spacing is 20 dots.
- If the character width is 20 dots or less, the character spacing is specified as 20 minus the character width.
- If the character width exceeds 20 dots, the character spacing is specified as the character width.
(The spacing between characters is 0 dot.)

In this case, the pitch does not exactly equal the elite pitch.

- With double-width characters, the character spacing is doubled (40 dots).
- With half-width characters, the character spacing is halved (10 dots).
- When the character spacing is changed with ESC SP, the setting is updated.
- This command is invalid when proportional pitch is selected.
- In outline fonts, the spacing between characters is 0 dot.

Example

For a 11-dot font at full width:

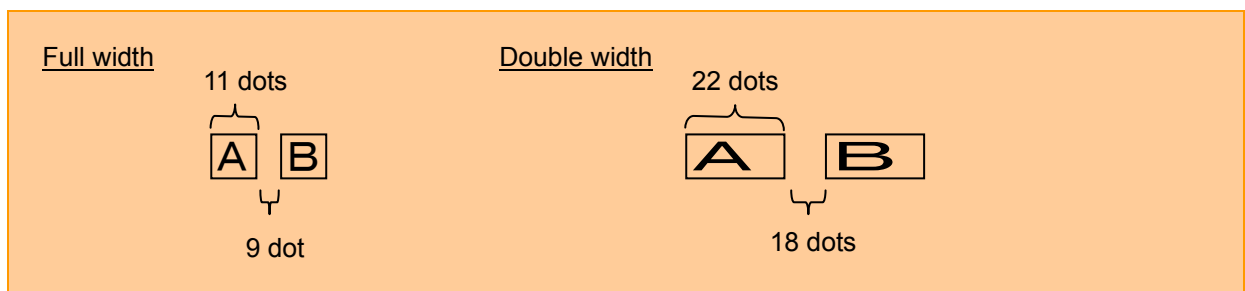

ESC p Specify proportional characters

ASCII:	ESC	p	n
Decimal:	27	112	n
Hexadecimal:	1B	70	n

Parameters

n: 0, 1, 48 ("0"), 49 ("1")

Description

- Specifies proportional characters.
n=1 or 49 ("1"): Specifies proportional characters.
n=0 or 48 ("0"): Cancels proportional characters.
- If proportional characters are specified, the character spacing specified with ESC SP is maintained as is.

ESC W Specify double-width characters

ASCII:	ESC	W	n
Decimal:	27	87	n
Hexadecimal:	1B	57	n

Parameters

n: 0, 1 or 48 ("0"), 49 ("1")

Description

- Specifies double-width characters.
n=1 or 49 ("1"): Specifies double-width characters.
n=0 or 48 ("0"): Cancels double-width characters.
- Double-width characters specified with this command are not canceled with the DC4 or FS DC4 code or a line feed.
- Canceling double-width characters also cancels compressed (half-width) characters.

Example

Code: ABC ESC W 1 ABC ESC W 0 ABC FF
Print result: ABC**ABC**ABC

SO Specify auto-canceling stretched characters

ASCII:	SO
Decimal:	14
Hexadecimal:	0E

Parameters

None

Description

- Prints the subsequent text at double width.
- This command is canceled with DC4, CR, LF, VT, FF, ESC J, or an automatic line feed.
- This command is canceled with ESC \$, ESC \, ESC (V or ESC (v.
- This command can also be canceled with ESC W0.

ESC SO Specify auto-canceling stretched characters

ASCII:	ESC	SO
Decimal:	27	14
Hexadecimal:	1B	0E

Parameters

None

Description

- Same as SO

Example

Code:	ABC ESC SO ABCDEFGHIJK...XYZ FF
Print result:	ABC ABCDEFGHIJK . . . (Automatic line feed) XYZ

SI Specify compressed characters

ASCII:	SI
Decimal:	15
Hexadecimal:	0F

Parameters

None

Description

- Prints the subsequent text at half width.

ESC SI Specify compressed characters

ASCII:	ESC	SI
Decimal:	27	15
Hexadecimal:	1B	0F

Parameters

None

Description

- Same as SI

DC2 Cancel compressed characters

ASCII:	DC2
Decimal:	18
Hexadecimal:	12

Parameters

None

Description

- Cancels compressed characters specified with SI.

DC4 Cancel auto-canceling double-width characters

ASCII:	DC4
Decimal:	20
Hexadecimal:	14

Parameters

None

Description

- Cancels double-width characters specified with ESC SO or SO.
- Does not cancel the ESC W command.

Example

Code:	ABC ESC SO ABCDEF DC4 GHIJK FF
Print result:	ABC ABCDEF GHIJK

ESC – Apply/cancel underlining

ASCII:	ESC	-	n
Decimal:	27	45	n
Hexadecimal:	1B	2D	n

Parameters

n: 0, 1, 2, 3, 4 or 48 ("0"), 49 ("1"), 50 ("2"), 51 ("3"), 52 ("4")

Description

- Applies or cancels underlining.
 - n=4 or 52 ("4"): Applies underlining with a width of 4 dots.
 - n=3 or 51 ("3"): Applies underlining with a width of 3 dots.
 - n=2 or 50 ("2"): Applies underlining with a width of 2 dots.
 - n=1 or 49 ("1"): Applies underlining with a width of 1 dot.
 - n=0 or 48 ("0"): Cancels underlining.
- This command is valid anywhere in a text line.
- The underlining specified with this command is a continuous line.
- Spaces between characters and words are also underlined.
- Areas with the "specify absolute horizontal position" (ESC \$) and "specify relative horizontal position" (ESC \) commands are not underlined.
- 4 dots is added to the line feed amount for lines that include underlined characters.
- The underline is positioned as follows:

Underline	Underline Position
1 dot wide	Between 2 dots and 3 dots below the characters
2 dots wide	Between 2 dots and 3 dots below the characters
3 dots wide	Between 1 dot and 3 dots below the characters
4 dots wide	Between 1 dot and 4 dots below the characters

ABCDE ABCDE ABCDE
 (1-dot width) (3-dot width)

Example

Code: ABC ESC - 1 ABC ESC - 0 ABC FF
 Print result: ABCABCABC

ESC ! Global formatting

ASCII:	ESC	!	n
Decimal:	27	33	n
Hexadecimal:	1B	21	n

Parameters
 $0 \leq n \leq 255$
Description

- Specifies a combination of print modes.
- Specifies modes depending on the bit value of n.
- When the ESC ! code is used, a combination of multiple print modes can be specified at one time.
- The priority order is from Bit 5 to Bit 2.
- Bit 0 is available only if Bit 1 is 0.
- Selected character styles are canceled, and the characters return to the normal style.
- Canceling double-width characters also cancels compressed (half-width) characters.

Bit	7	6	5	4	3	2	1	0
1	Underline	Italics	Double width	Double height	Bold	Compressed	Proportional	12 cpi
0	Cancel	Cancel	Cancel	Cancel	Cancel	Cancel	Cancel	10 cpi

Example

- To apply underlining and specify double-width characters at the same time:

Code: ABC ESC ! A0h ABC ESC ! 00h ABC FF
 Print result: ABCABCABC

ESC SP Specify character spacing

ASCII:	ESC	SP	n
Decimal:	27	32	n
Hexadecimal:	1B	20	n

Parameters

$$0 \leq n \leq 127$$
Description

- Specifies the character spacing.
- n indicates the number of dots.
- The default setting is 0 dot.
- With double-width characters, the character spacing is doubled; with half-width characters, it is halved.

ESC X Specify character size

ASCII:	ESC	X	m	nL	nH
Decimal:	27	88	m	nL	nH
Hexadecimal:	1B	58	m	nL	nH

Parameters

Character width:	The value of m is irrelevant.				
Character size:	<Bitmap fonts> Valid only with: nL=24, 32, 48 dots nH=0		<Outline fonts> The maximum is: nL=144 nH=1		

Description

- This command is used only to change the size.
- Outline must not be specified.
- The character width cannot be specified.
- The character size is specified as $n=nL+nH*256$ dots.
- With bitmap fonts, only n=24, 32 and 48 are valid.
- With outline fonts, n=400 is the maximum.
- The commands for specifying stretched characters, compressed characters and the character spacing (SO, ESC W, ESC !, ESC SP) remain available.

Example

For “ABC” at a 24-dot size and “DEF” at a 48-dot size:

```
Code:      ESC k 01h
           ESC X 00h 18h 00h ABC
           ESC k 09h
           ESC X 00h 30h 00h DEF FF

Print result: ABCDEF
```

5.3 Line feed commands

ESC 0 Specify line feed of 1/8 inch

ASCII:	ESC	0
Decimal:	27	48
Hexadecimal:	1B	30

Parameters

None

Description

- Specifies a line feed of 1/8 inch (about 0.32 cm).

ESC 2 Specify line feed of 1/6 inch

ASCII:	ESC	2
Decimal:	27	50
Hexadecimal:	1B	32

Parameters

None

Description

- Specifies a line feed of 1/6 inch (about 0.42 cm).

ESC 3 Specify minimum line feed

ASCII:	ESC	3	n
Decimal:	27	51	n
Hexadecimal:	1B	33	n

Parameters
 $0 \leq n \leq 255$
Description

- Specifies a line feed of n dots per line.

ESC A Specify line feed of n/60 inch

ASCII:	ESC	A	n
Decimal:	27	65	n
Hexadecimal:	1B	41	n

Parameters
 $0 \leq n \leq 255$
Description

- Specifies a line feed of n/60 inch.

5.4 Horizontal movement commands

ESC I Specify left margin

ASCII:	ESC	I	n
Decimal:	27	108	n
Hexadecimal:	1B	6C	n

Parameters

$0 \leq n \leq 255$


$0 \leq \text{left margin} < \text{right margin}$

Description

- The left margin and the right margin use the left edge of the physically printable area as the reference.
- The area between the left edge of the physically printable area and the specified number of columns is specified as an unprinted area. The left margin position is the right edge of the specified column.
(Character width*n)
- The setting is in the range $0 \leq (\text{character width} * n) \leq x$. Settings outside that range are ignored. However, x is a value dependent on the media.
- The area between the left edge (first column) to the nth column is specified as an unprinted area.
- The position of the left margin is the character width (when this command was specified)*n from the left edge.

The character width when the margin specified includes the settings for the character spacing, full-width character spacing or half-width character spacing. In addition, when a pitch of 10 cpi , 12 cpi or 15 cpi, compressed characters or double-width characters are specified, that character width is considered as the unit.

However, character styles that increase the character width are not applied.

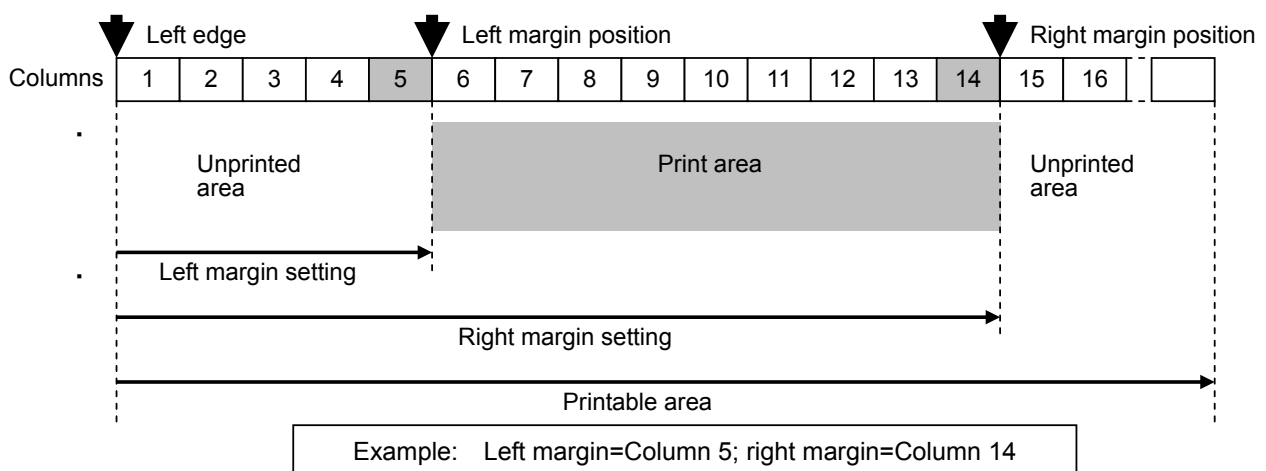

- The horizontal print position is moved to the left margin position.
- If the left margin setting is not at the beginning of the line, the left margin is specified after a line feed.
The beginning of the line indicates the left margin position for left alignment; for right and center alignment, it means that no image or character is entered on the line.
- Even if the character width is changed after the left margin has been specified, the left margin position does not change.
- A left margin setting that puts the left margin position to the right of the right margin position is ignored.
- The left margin should be specified at least one column less than the right margin.
- If the difference between the right margin position and the left margin position is less than one character, that character is ignored.
- When proportional pitch is specified with the ESC p command, a character width of 10 cpi is applied.
- If the print media is continuous length tape, the printing orientation is landscape and the page length is not specified, commands specifying the left margin are ignored.

Example

To specify the left margin at Column 3:

Code: ABC CR ESC I 03h EFGHIJ FF

Print result: | ABC
 | EFGHIJ

ESC Q Specify right margin

ASCII:	ESC	Q	n
Decimal:	27	81	n
Hexadecimal:	1B	51	n

Parameters
 $1 \leq n \leq 255$

Left margin < character width (when the command was specified) * n ≤ printable area

Description

- The left margin and the right margin use the left edge of the physically printable area as the reference.
- The right margin position is the right edge of the specified column. (Character width * n)
- The setting is in the range $0 \leq (\text{character width} * n) \leq x$. Settings outside that range are ignored. However, x is a value dependent on the media.
- Left margin ≤ print area < right margin
- The position of the right margin is the character width (when the command was specified) * n from the left edge.

The character width when the margin is specified includes the settings for the character spacing, full-width character spacing or half-width character spacing. In addition, when a pitch of 10 cpi, 12 cpi or 15cpi, compressed characters or double-width characters are specified, that character width is considered as the unit.

However, character styles that increase the character width are not applied.

- The horizontal print position is moved to the left margin position.
- If the right margin setting is not at the beginning of the line, the right margin is specified after a line feed. The beginning of the line indicates the left margin position for left alignment; for right and center alignment, it means that no image or character is entered on the line.
- Even if the character width is changed after the right margin has been specified, the right margin position does not change.
- A right margin setting that puts the right margin position to the left of the left margin position is ignored.
- The right margin should be specified at least one column (greater than the left margin).
- If the difference between the right margin position and the left margin position is less than one character, that character is ignored.
- When proportional pitch is specified with the ESC p command, a character width of 10 cpi is applied.
- If the print media is continuous length tape, the printing orientation is landscape and the page length is not specified, commands specifying the right margin are ignored.

CR **Carriage return**

ASCII:	CR
Decimal:	13
Hexadecimal:	0D

Parameters

None

Description


- Ends input of a line, and waits for input of the next line.
- The next print position becomes the beginning of the next line.
- A line feed command immediately after the carriage return is ignored.
- Auto-canceling double-width characters specified with SO or ESC SO are canceled.
- Same process as LF

ESC D Specify horizontal tab position

ASCII:	ESC	D	$[n]_k$	NUL
Decimal:	27	68	$[n]_k$	0
Hexadecimal:	1B	44	$[n]_k$	00h

Parameters
 $1 \leq n \leq 255, 0 \leq k \leq 32$
Description

- The horizontal tab position is the character width (when the command was specified)*n from the left margin.
 - Enter n values in ascending order and end the settings with NUL.
 - If an n value is smaller than a previous one, tab setting is ended.
 - Even if the character width is changed after the horizontal tab positions have been specified, the horizontal tab position settings do not change.
 - ESC D NUL cancels all horizontal tab positions.
 - If the left margin is moved, the horizontal tab positions are also moved by the same amount.
 - Up to 32 horizontal tab positions can be specified. However, horizontal tab positions beyond the right margin are invalid and only become valid when a change in the right margin setting or left margin setting moves the print area to include those tab positions.
 - The character width when the horizontal tabs are specified includes the settings for the character spacing, full-width character spacing or half-width character spacing. In addition, when a pitch of 10 cpi, 12 cpi, or 15 cpi, compressed characters or double-width characters are specified, that character width is considered as the unit.
 - When proportional pitch is specified with ESC p, horizontal tab positions are specified at 10 cpi.
 - When the printer is turned on, a horizontal tab position is specified every 8 columns at 10 cpi.
- Even if the character width is changed before the horizontal tab positions has been specified, the horizontal tab positions do not change.

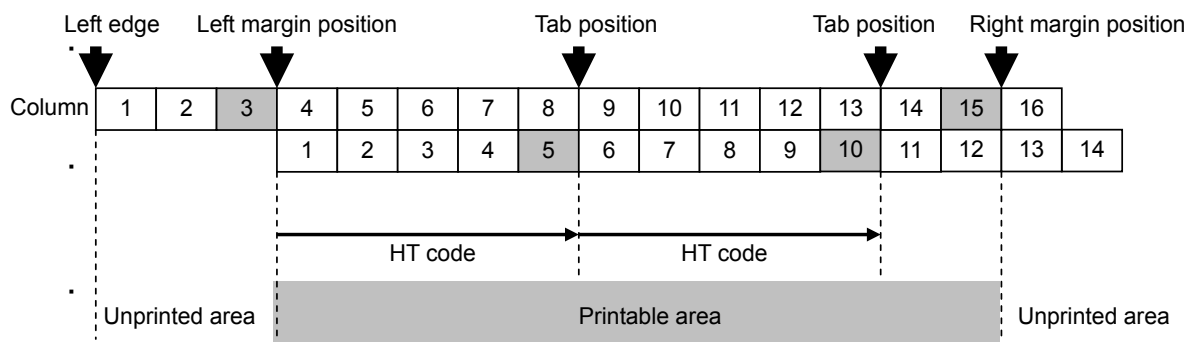**Example:**

After the left margin is specified as Column 3 and the right margin as Column 15, horizontal tabs were specified at Column 5 and Column 10, and HT were performed.

HT Perform horizontal tab

ASCII:	HT
Decimal:	9
Hexadecimal:	09

Parameters

None

Description

- Moves the horizontal print position to the nearest horizontal tab position to the right of the input position.
- If there is no horizontal tab position to the right of the input position, or if the next horizontal tab position is beyond the right margin, the HT command is ignored.
- If underlining is specified, the space between the current position and the next horizontal tab position is not underlined.
- When the printer is turned on, a horizontal tab position is specified every 8 columns at 10 cpi.
Even if the character width is changed before the horizontal tab positions have been specified, the horizontal tab positions do not change.
- This command is available only with left alignment.

Example

To specify horizontal tabs at Column 4, Column 8, and Column 12, and perform horizontal tabs:

Code:	ESC D 04h 08h 0Ch 00h
	123456789012 CR A HT B HT C HT D FF
Print result:	123456789012
	A B C D

ESC \$ Specify absolute horizontal position

ASCII:	ESC	\$	n1	n2
Decimal:	27	36	n1	n2
Hexadecimal:	1B	24	n1	n2

Parameters

$0 \leq n1 \leq 255, 0 \leq n2 \leq 255$

Description

- Specifies the absolute print position (in dots) for the next data.
- An absolute print position specifies the next print position as a number of dots from the left margin.
- n1 and n2 indicate the number of dots from the left margin.
(Number of dots = $n1 + n2 * 256$)
- The maximum number of dots that can be specified with n1 and n2 depends on the media.
- This command is available only with left alignment.

ESC \ Specify relative horizontal position

ASCII:	ESC	\	n1	n2
Decimal:	27	92	n1	n2
Hexadecimal:	1B	5C	n1	n2

Parameters

$0 \leq n1 \leq 255, 0 \leq n2 \leq 255$

Description

- Specifies the horizontal print position (in dots) as a relative position from the current position.
- A relative position specifies the next print position as a number of dots from the current position.
- n1 and n2 indicate the number of dots from the current position. (Number of dots = $n1 + n2 * 256$)
- Left margin position \leq horizontal position after moving $<$ right margin position
Horizontal position after moving = $n1 + n2 * 256$
- The specified value for moving to the left is expressed as a two's complement. It is determined by the following equation.
 $n1 + n2 * 256 = 65536 - \text{distance actually moved}$
- This command is available only with left alignment.

ESC a Specify alignment

ASCII:	ESC	a	n
Decimal:	27	97	n
Hexadecimal:	1B	61	n

Parameters

0≤n≤3 or "0"≤n≤"3"

Description

- Prints the subsequent text with the alignment described below, according to the value of n.
 - n=0 or 48 ("0"): Applies left alignment.
 - n=1 or 49 ("1"): Applies center alignment.
 - n=2 or 50 ("2"): Applies right alignment.
 - n=3 or 51 ("3"): Applies nothing.
- The default setting is n=0.
- Data is aligned between the left and right margins by entering a CR, LF, and FF code or by buffer printing.
- If the alignment setting is not at the beginning of the line, the alignment is specified after a line feed.

The beginning of the line indicates the left margin position for left alignment;
for right and center alignment, it means that no image or character is entered on the line.
- HT, ESC \ and ESC \$ are ignored when n=1 or n=2.
- If the print media is continuous length tape, the printing orientation is landscape and the page length is not specified, commands specifying alignment are ignored.

5.5 Vertical movement commands

LF **Line feed**

ASCII:	LF
Decimal:	10
Hexadecimal:	0A

Parameters

None

Description

- Feeds the paper by the amount specified by a line feed command (ESC 0, ESC 2, ESC 3, ESC A).
- The print position becomes the beginning of the next line.
- The default value is a line feed of 48 dots.
- A carriage return immediately after a line feed is ignored.
- Auto-canceling double-width characters specified with SO or ESC SO are canceled.
- Same process as CR

FF **Page feed**

ASCII:	FF
Decimal:	12
Hexadecimal:	0C

Parameters

None

Description

- Starts the printing.
- The previously entered data string of characters and commands is cleared after being printed.
- At this time, auto-canceling double-width characters specified with SO or ESC SO are canceled.

ESC J Forward paper feed


ASCII:	ESC	J	n
Decimal:	27	74	n
Hexadecimal:	1B	4A	n

Parameters

$0 \leq n \leq 255$

Description

- Ends input for the current line and moves the vertical print position forward by 1 dot.
- If the bottom margin setting is exceeded, printing starts.
- With left alignment, the print position for the next line becomes the end position of the current line.
(The horizontal position does not move to the left margin.)
With right alignment and center alignment, the horizontal position moves to the beginning of the line.
- Auto-canceling double-width characters specified with SO or ESC SO are canceled.

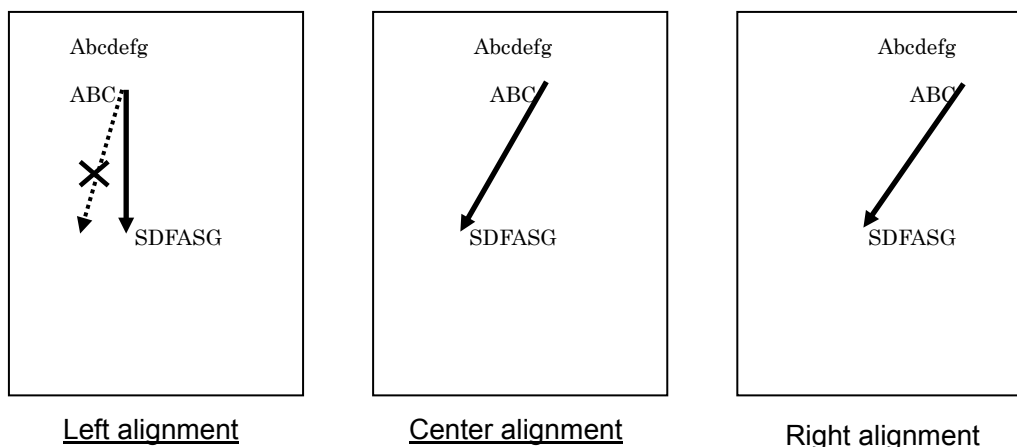

Example: Performing a forward paper feed after the second line

ESC B Specify vertical tab position

ASCII:	ESC	B	$[n]_k$	NUL
Decimal:	27	66	$[n]_k$	0
Hexadecimal:	1B	42	$[n]_k$	00h

Parameters $1 \leq n \leq 255$ $0 \leq k \leq 16$ Description

- The vertical tab position is the line feed amount (when this command was specified)*n from the top margin.
- Enter n values in ascending order and end the settings with NUL.
- If an n value is smaller than a previous one, tab setting is ended.
- Up to 16 vertical tabs can be specified.
- ESC B NUL cancels all vertical tab positions.
- Vertical tab positions can be specified regardless of the setting of the bottom margin position. However, vertical tab positions outside the print area (beyond the bottom margin position) are invalid and only become valid when a change in the top margin setting or bottom margin setting moves the print area to include those tab positions.
- Use VT to move to the vertical tab position.
- When changing vertical tab positions, specify all positions again.
- If the top margin is moved, the vertical tab positions are also moved by the same amount.
- Even if the line feed amount is changed after the vertical tab positions have been specified, the vertical tab position settings do not change.
- Performing a VT when no vertical tabs have been specified is equal to performing a CR.

VT Perform vertical tab


ASCII:	VT
Decimal:	11
Hexadecimal:	0B

Parameters

None

Description

- Moves the print position to the nearest vertical tab position down from the input position.
- The next horizontal print position becomes the beginning of the line.
- If the next vertical tab position extends beyond the bottom margin, or if there is no vertical tab position specified below the current position, VT is performed as if it is (moves to the TOF position of the next page).

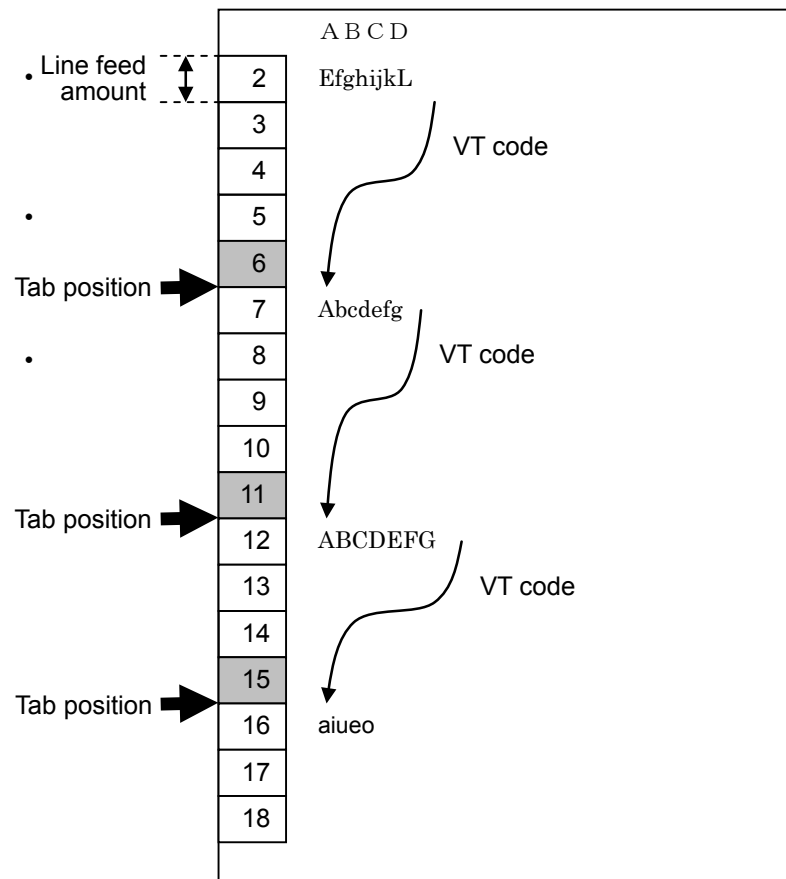

Example: Vertical tabs are specified at Lines 6, 11, and 15, and data is entered while VT are performed.

- When all vertical tab positions have been canceled by an initialization or with ESC B NUL, performing VT is equal to performing CR.
- Auto-canceling double-width characters specified with SO or ESC SO are canceled.

ESC (V Specify absolute vertical position

ASCII:	ESC	(V	nL	nH	mL	mH
Decimal:	27	40	86	nL	nH	mL	mH
Hexadecimal:	1B	28	56	nL	nH	mL	mH

Parameters

nL: 2

nH: 0

 $0 \leq mL \leq 255$ $0 \leq mH \leq 127$ **Description**

- Specifies the vertical print position as an absolute position from the top margin position.
Vertical position = $mL + mH * 256 + \text{top margin}$
- The absolute vertical position is measured from the top margin position when this command was specified.
- If a position extending beyond the bottom margin is specified, printing starts.
- There is no restriction on the amount of movement back (upward) from the current position.
- With left alignment, the print position for the next line becomes the end position of the current line.
(The horizontal position does not move to the left margin.)
With right alignment and center alignment, the horizontal position moves to the beginning of the line.
- Auto-canceling double-width characters specified with SO or ESC SO are canceled.

ESC (v Specify relative vertical position

ASCII:	ESC	(v	nL	nH	mL	mH
Decimal:	27	40	118	nL	nH	mL	mH
Hexadecimal:	1B	28	76	nL	nH	mL	mH


Parameters

nL: 2

nH: 0

 $0 \leq mL \leq 255$ $0 \leq mH \leq 63, 192 \leq mH \leq 255$ $-16384 \leq (mL + mH * 256) \leq 16383$ **Description**

- Specifies the vertical print position as a relative position from the current position.
Vertical position after movement = $mL + mH * 256 + \text{current position}$
- When moving upwards, the specified value is expressed as a two's complement.
It is determined by the following equation.
 $mL + mH * 256 = 65536 - \text{distance actually moved}$
- Settings moving the print position above the top margin are ignored.
- If a position extending beyond the bottom margin is specified, printing starts.
- With left alignment, the print position for the next line becomes the end position of the current line.
(The horizontal position does not move to the left margin.)
With right alignment and center alignment, the horizontal position moves to the beginning of the line.
- Auto-canceling double-width characters specified with SO or ESC SO are canceled.

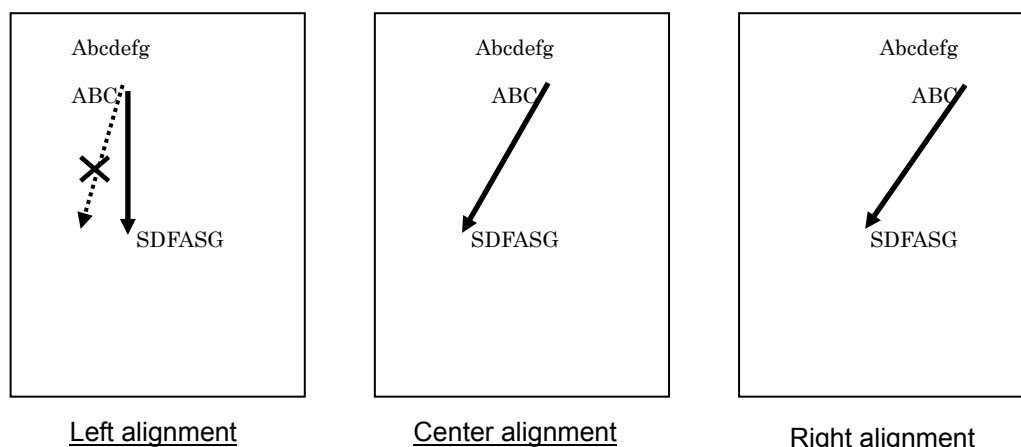

Example: Moving to a vertical position specified after the second line

5.6 Paper formatting commands

ESC (c Specify page format

ASCII:	ESC	(c	nL	nH	tL	tH	BL	BH
Decimal:	27	40	99	nL	nH	tL	tH	BL	BH
Hexadecimal:	1B	28	63	nL	nH	tL	tH	BL	BH

Parameters

nL: 4, nH: 0

$(tL+tH*256) < (BL+BH*256)$

Top margin < bottom margin

Description

- Specifies settings for the top and bottom margins.
- The physically printable area depends on the media.
The top margin and the bottom margin are specified in units of 1 dot using the top edge of the physically printable area as the reference.
(The left margin and the right margin use the left edge of the physically printable area as the reference.)
- Top margin = $tL+tH*256$
- Bottom margin = $BL+BH*256$
- The top margin position is the TOF in the vertical direction.
- All previously entered text is cleared.
- When this command is used previously specified top and bottom margins are canceled.
- A standard unit is not used.
- If the print media is continuous length tape, the printing orientation is landscape and the page length is not specified, commands specifying the page format are ignored.

ESC (C Specify page length

ASCII:	ESC	(C	nL	nH	mL	mH
Decimal:	27	40	67	nL	nH	mL	mH
Hexadecimal:	1B	28	43	nL	nH	mL	mH

Parameters

nL: 2, nH: 0

$0 \leq (mL + mH * 256) < 8192$ (for 203dpi printers)

$0 \leq (mL + mH * 256) < 12000$ (for 300dpi printers)

Description

- Specifies the page length.
- * A page length 0 indicates the Auto setting.
- The unit is 1 dot.
- Page length = $mL + mH * 256$
- The current paper position is the TOF.
- The top and bottom margins are canceled with ESC (c.
- All previously entered text is cleared.
- A standard unit is not used.
- This command is available only with continuous length tape.

Inch, mm, and dot conversion table

inch	mm	Number of dots (203dpi)	Number of dots (300dpi)
0	0.0	0	0
1	25.4	203	300
2	50.8	406	600
3	76.2	609	900
4	101.6	812	1200
5	127.0	1015	1500
6	152.4	1218	1800
7	177.8	1421	2100
8	203.2	1624	2400
9	228.6	1827	2700
10	254.0	2030	3000
11	279.4	2233	3300
12	304.8	2436	3600
13	330.2	2639	3900
14	355.6	2842	4200
15	381.0	3045	4500
16	406.4	3248	4800
17	431.8	3451	5100
18	457.2	3654	5400
19	482.6	3857	5700

inch	mm	Number of dots (203dpi)	Number of dots (300dpi)
20	508.0	4060	6000

5.7 Printer control commands

ESC @ Initialize

ASCII:	ESC	@
Decimal:	27	64
Hexadecimal:	1B	40

Parameters

None

Description

- Returns all commands to their default settings. (See below.)

Item	Default
Input buffer	Saved
Text buffer	Cleared
Print buffer	Cleared
Top margin	0 dot
Bottom margin	Depends on media
Left margin	0 dot
Right margin	Depends on media
Line feed amount	48 dots
Horizontal tab positions	Horizontal tab every 8 characters (based on a character width of 10 cpi)
Vertical tab positions	None
Character size	32 dots
Character spacing	0 dot
International character set	USA
Character style	Canceled
Compressed	Canceled
Horizontal print position	Top margin position (TOF position)
Vertical print position	Left margin position
Landscape setting	Canceled
Page length setting	Canceled
Font	Letter Gothic Bold

5.8 Graphics commands

ESC * Select bit image <for 203dpi printers>

ASCII:	ESC	*	m	n1	n2	Data
Decimal:	27	42	m	n1	n2	Data
Hexadecimal:	1B	2A	m	n1	n2	Data

Parameters

m: 0, 1, 2, 3, 4, 6, 32, 33, 38, 39

$0 \leq n1 \leq 255$, $0 \leq n2 \leq 11$

The image data is as follows:

- $n1 + n2 * 256$ bytes when $m = 0, 1, 2, 3, 4, 6$
- $(n1 + n2 * 256) * 3$ bytes when $m = 32, 33, 38, 39$

Description

- Refer to [“ESC * Select bit image <for 300dpi printers>”](#) for 300dpi printers.
- Selects and outputs a bit image according to the value of m.
- n1 and n2 indicate the number of dot positions.
 - n1: The remainder from dividing the number of dot positions by 256
 - n2: The quotient from dividing the number of dot positions by 256

m	Horizontal Dot Density	Vertical Dot Density	Horizontal Dot Resolution	Vertical Dot Resolution
0	60 dpi	60 dpi	4/203 inch	4/203 inch
1	120 dpi	60 dpi	2/203 inch	4/203 inch
2	120 dpi	60 dpi	2/203 inch	4/203 inch
3	240 dpi	60 dpi	1/203 inch	4/203 inch
4	80 dpi	60 dpi	3/203 inch	4/203 inch
6	90 dpi	60 dpi	3/203 inch	4/203 inch
32	60 dpi	180 dpi	4/203 inch	1/203 inch
33	120 dpi	180 dpi	2/203 inch	1/203 inch
38	90 dpi	180 dpi	3/203 inch	1/203 inch
39	180 dpi	180 dpi	1/203 inch	1/203 inch


- Horizontally neighboring dots are not omitted.

Limitations:

A maximum of 63 can be used with this command.


When m=0, 1, 2, 3, 4, 6

- n1 and n2 indicate the number of dot positions.
 - n1: The remainder from dividing the number of dot positions by 256
 - n2: The quotient from dividing the number of dot positions by 256

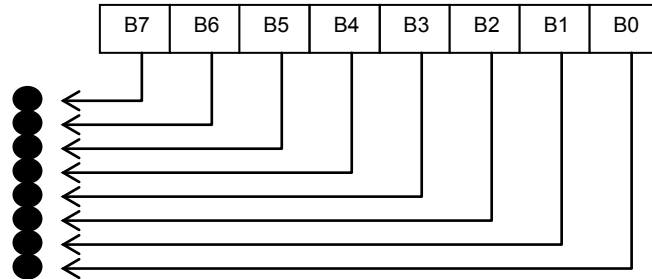


Relationship between the image data and the dots

- First, the data is lined up in one row as follows:

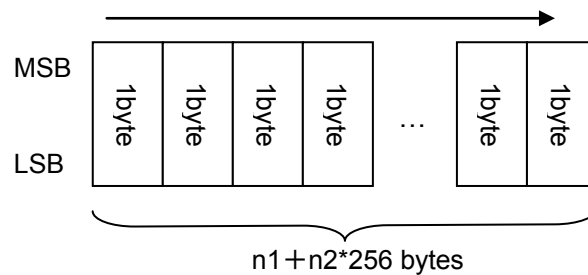

- One dot of the image data is enlarged as follows, according to the value of m.

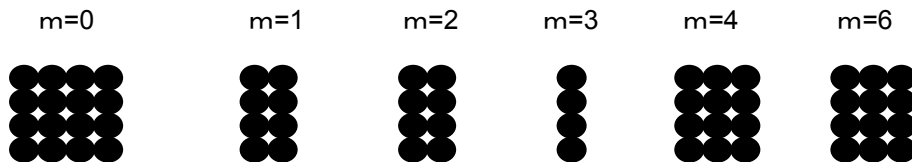


- As a result, the image is sized depending on the value of m, as follows:

m=0	32 dots vertically × (n1 + n2 * 256) * 4 dots horizontally
m=1	32 dots vertically × (n1 + n2 * 256) * 2 dots horizontally
m=2	32 dots vertically × (n1 + n2 * 256) * 2 dots horizontally
m=3	32 dots vertically × (n1 + n2 * 256) * 1 dots horizontally
m=4	32 dots vertically × (n1 + n2 * 256) * 3 dots horizontally
m=6	32 dots vertically × (n1 + n2 * 256) * 3 dots horizontally


When m=32, 33, 38, 39

- n1 and n2 indicate the number of dot positions.
 - n1: The remainder from dividing the number of dot positions by 256
 - n2: The quotient from dividing the number of dot positions by 256

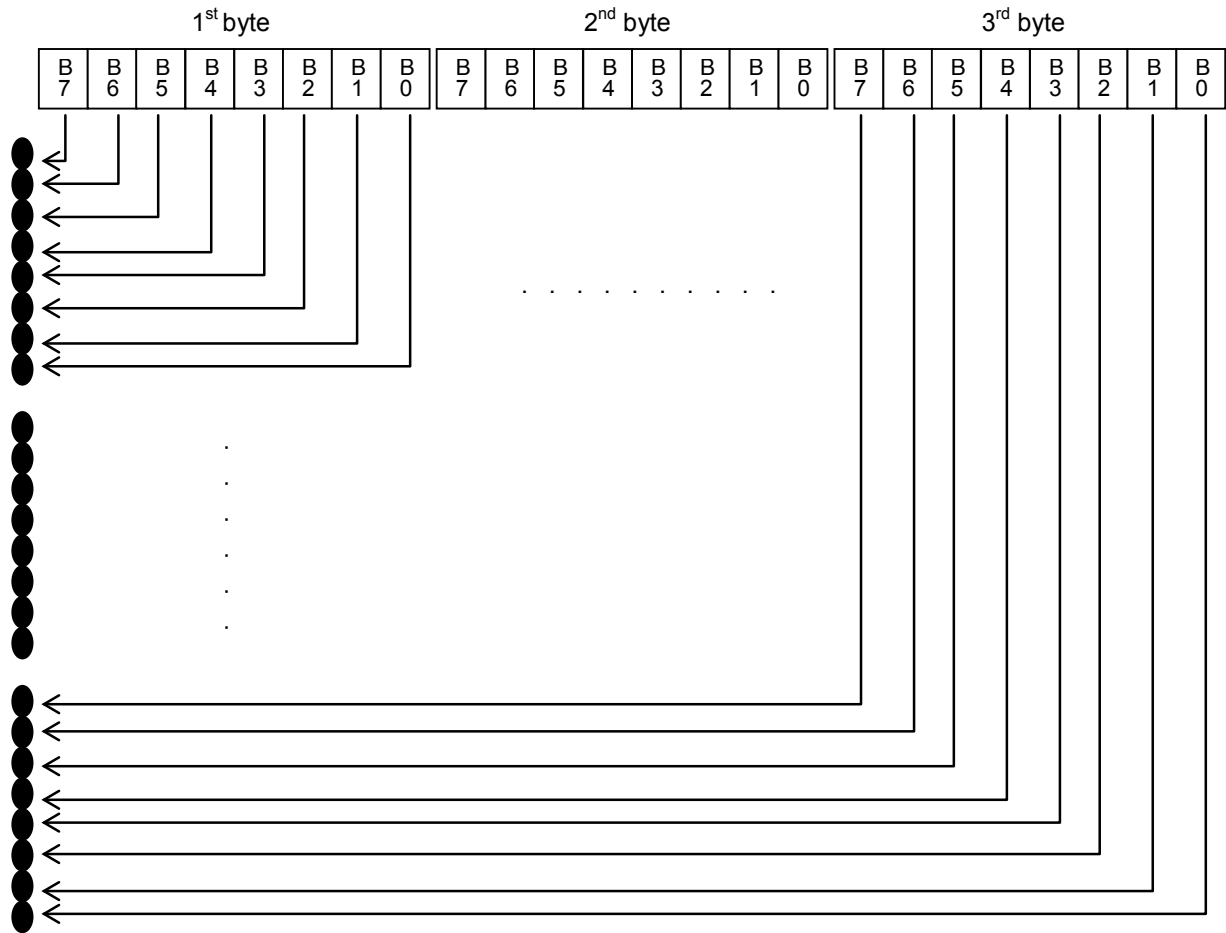


Relationship between the image data and the dots

First, the data is lined up in three rows as follows:

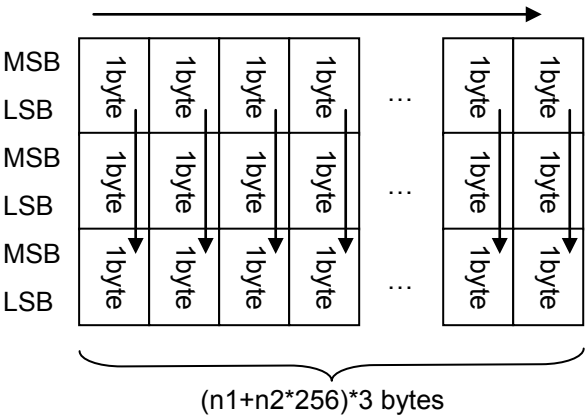

- One dot of the image data is enlarged as follows, according to the value of m.



- As a result, the image is sized depending on the value of m, as follows:

m=32	24 dots vertically × (n1 + n2 × 256) × 4 dots horizontally
m=33	24 dots vertically × (n1 + n2 × 256) × 2 dots horizontally
m=38	24 dots vertically × (n1 + n2 × 256) × 3 dots horizontally
m=39	24 dots vertically × (n1 + n2 × 256) × 1 dots horizontally

ESC * Select bit image <for 300dpi printers>

ASCII:	ESC	*	m	n1	n2	Data
Decimal:	27	42	m	n1	n2	Data
Hexadecimal:	1B	2A	m	n1	n2	Data

Parameters

m: 0, 1, 2, 3, 4, 6, 32, 33, 38, 39, 40, 71, 72, 73

$0 \leq n1 \leq 255$, $0 \leq n2 \leq 11$

The image data is as follows:

- $n1 + n2 * 256$ bytes when $m = 0, 1, 2, 3, 4, 6$
- $(n1 + n2 * 256) * 3$ bytes when $m = 32, 33, 38, 39, 40$
- $(n1 + n2 * 256) * 6$ bytes when $m = 71, 72, 73$

Description

- Refer to "[ESC * Select bit image <for 203dpi printers>](#)" for 203dpi printers.
- Selects and outputs a bit image according to the value of m.
- n1 and n2 indicate the number of dot positions.
 - n1: The remainder from dividing the number of dot positions by 256
 - n2: The quotient from dividing the number of dot positions by 256

m	Horizontal Dot Density	Vertical Dot Density	Horizontal Dot Resolution	Vertical Dot Resolution
0	60 dpi	60 dpi	6/300 inch	6/300 inch
1	120 dpi	60 dpi	3/300 inch	6/300 inch
2	120 dpi	60 dpi	3/300 inch	6/300 inch
3	240 dpi	60 dpi	2/300 inch	6/300 inch
4	80 dpi	60 dpi	4/300 inch	6/300 inch
6	90 dpi	60 dpi	4/300 inch	6/300 inch
32	60 dpi	180 dpi	6/300 inch	2/300 inch
33	120 dpi	180 dpi	3/300 inch	2/300 inch
38	90 dpi	180 dpi	4/300 inch	2/300 inch
39	180 dpi	180 dpi	2/300 inch	2/300 inch
40	300 dpi	180 dpi	1/300 inch	2/300 inch
71	180 dpi	360 dpi	2/300 inch	1/300 inch
72	360 dpi	360 dpi	1/300 inch	1/300 inch
73	360 dpi	360 dpi	1/300 inch	1/300 inch


- Horizontally neighboring dots are not omitted.

Limitations:

A maximum of 63 can be used with this command.


When m=0, 1, 2, 3, 4, 6

- n1 and n2 indicate the number of dot positions.
 - n1: The remainder from dividing the number of dot positions by 256
 - n2: The quotient from dividing the number of dot positions by 256

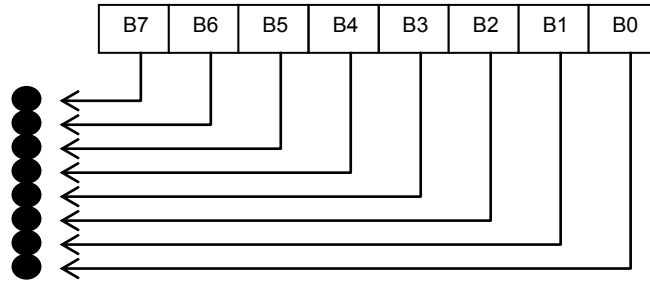


Relationship between the image data and the dots

- First, the data is lined up in one row as follows:

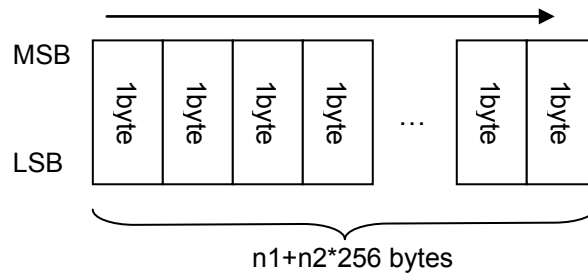

- One dot of the image data is enlarged as follows, according to the value of m.

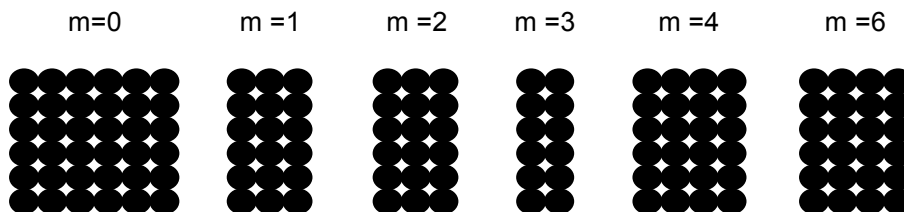


- As a result, the image is sized depending on the value of m, as follows:

m=0	48 dots vertically×(n1+n2*256)*6 dots horizontally
m=1	48 dots vertically×(n1+n2*256)*3 dots horizontally
m=2	48 dots vertically×(n1+n2*256)*3 dots horizontally
m=3	48 dots vertically×(n1+n2*256)*2 dots horizontally
m=4	48 dots vertically×(n1+n2*256)*4 dots horizontally
m=6	48 dots vertically×(n1+n2*256)*4 dots horizontally


When m=32, 33, 38, 39, 40

- n1 and n2 indicate the number of dot positions.
 - n1: The remainder from dividing the number of dot positions by 256
 - n2: The quotient from dividing the number of dot positions by 256

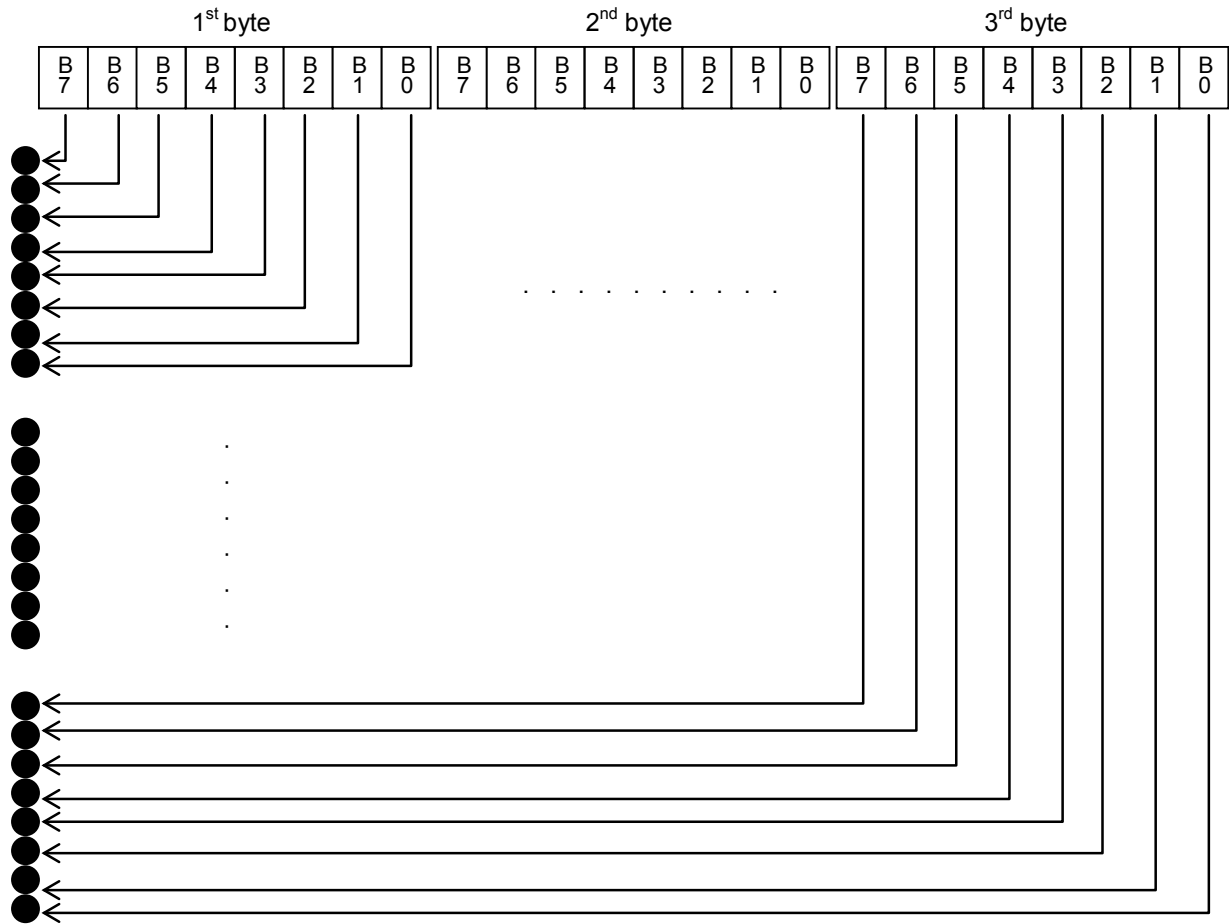


Relationship between the image data and the dots

First, the data is lined up in three rows as follows:

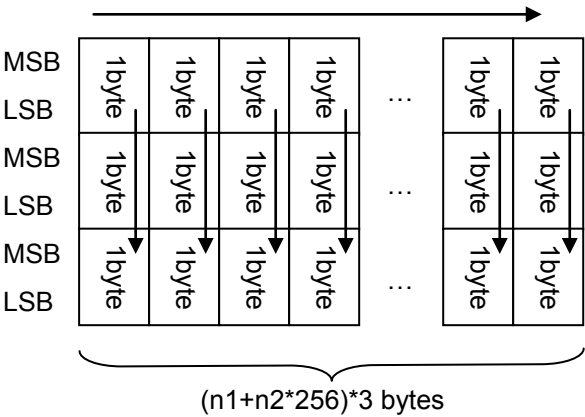

- One dot of the image data is enlarged as follows, according to the value of m.

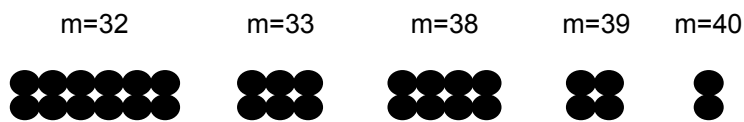


- As a result, the image is sized depending on the value of m, as follows:

m=32	48 dots vertically × (n1 + n2 × 256) × 6 dots horizontally
m=33	48 dots vertically × (n1 + n2 × 256) × 3 dots horizontally
m=38	48 dots vertically × (n1 + n2 × 256) × 4 dots horizontally
m=39	48 dots vertically × (n1 + n2 × 256) × 2 dots horizontally
m=40	48 dots vertically × (n1 + n2 × 256) × 1 dot horizontally


When m=71, 72, 73

- n1 and n2 indicate the number of dot positions.
n1: The remainder from dividing the number of dot positions by 256
n2: The quotient from dividing the number of dot positions by 256

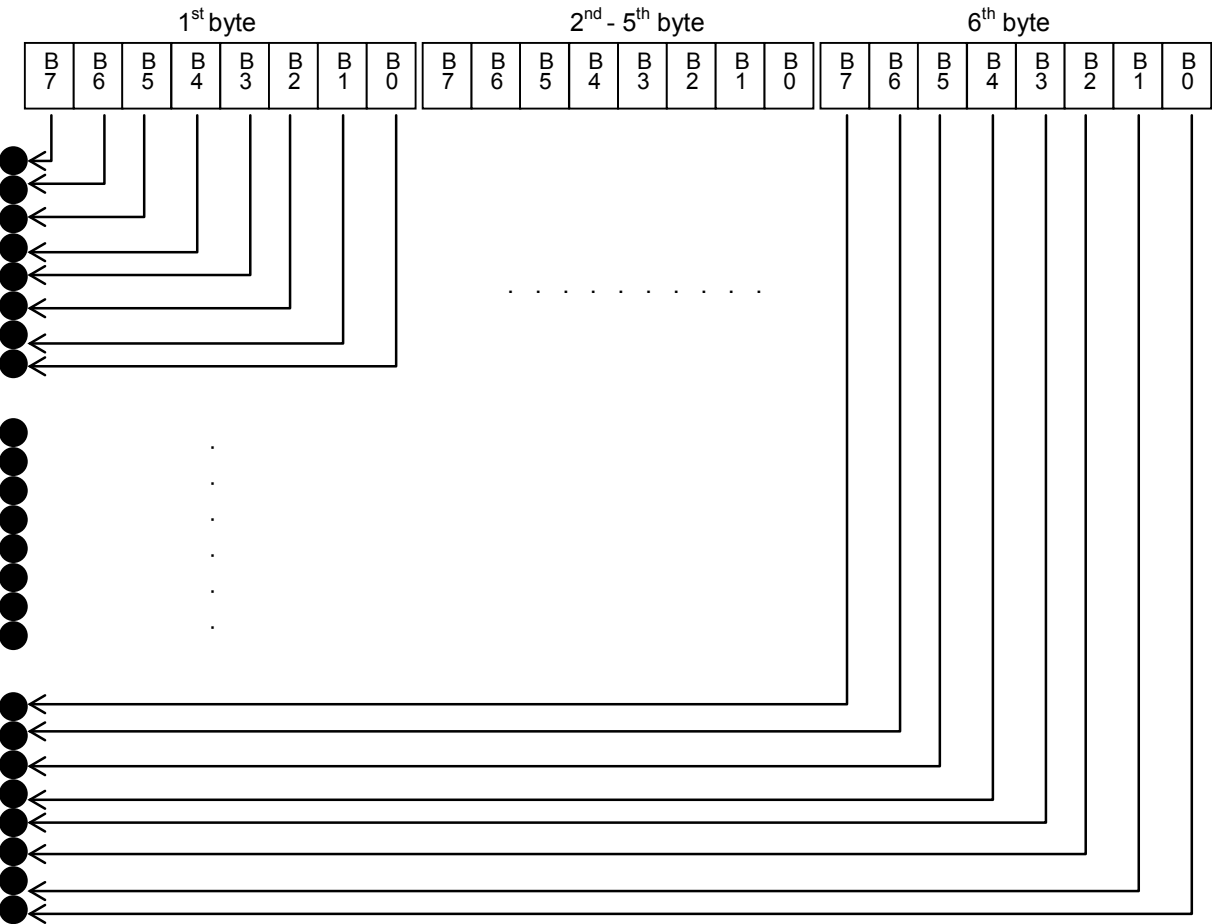


Relationship between the image data and the dots

First, the data is lined up in six rows as follows:

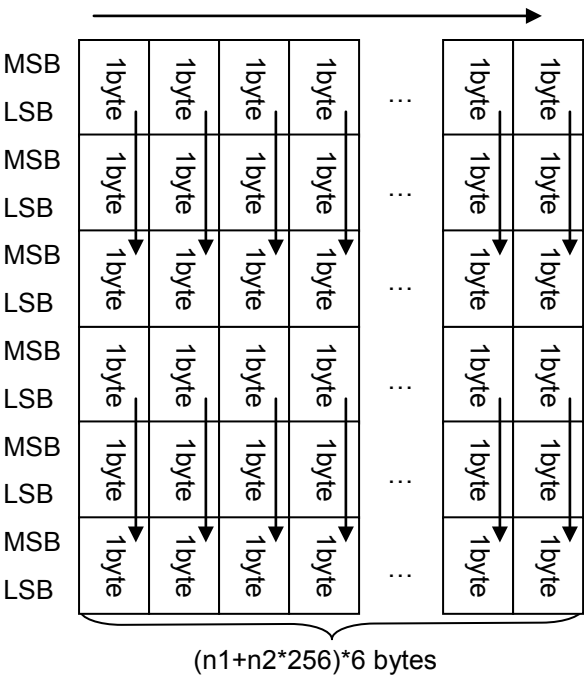

- One dot of the image data is enlarged as follows, according to the value of m.



- As a result, the image is sized depending on the value of m, as follows:

m=71	48 dots vertically×(n1+n2*256)*2 dots horizontally
m=72	48 dots vertically×(n1+n2*256)*1 dot horizontally
m=73	48 dots vertically×(n1+n2*256)*1 dot horizontally

ESC K 8-bit single-density bit image

ASCII:	ESC	K	n1	n2	Data
Decimal:	27	75	n1	n2	Data
Hexadecimal:	1B	4B	n1	n2	Data

Parameters

$0 \leq n1 \leq 255$, $0 \leq n2 \leq 3$

The data contains $n1 + n2 * 256$ bytes of image data.

Description

Specifies that an 8-bit single-density bit image is printed with the number of dot positions indicated by n1 and n2.

- Same behavior as M=0 specified in ESC *.

ESC L 8-bit double-density bit image

ASCII:	ESC	L	n1	n2	Data
Decimal:	27	76	n1	n2	Data
Hexadecimal:	1B	4C	n1	n2	Data

Parameters

$0 \leq n1 \leq 255$, $0 \leq n2 \leq 3$

The data contains $n1 + n2 * 256$ bytes of image data.

Description

Specifies that an 8-bit double-density bit image is printed with the number of dot positions indicated by n1 and n2.

- Same behavior as M=1 specified in ESC *.

ESC Y 8-bit double-speed double-density bit image

ASCII:	ESC	Y	n1	n2	Data
Decimal:	27	89	n1	n2	Data
Hexadecimal:	1B	59	n1	n2	Data

Parameters

$0 \leq n1 \leq 255, 0 \leq n2 \leq 3$

The data contains $n1 + n2 * 256$ bytes of image data.

Description

- Same as for an 8-bit double-density bit image. Horizontally neighboring dots are not omitted.

ESC Z 8-bit quadruple-density bit image

ASCII:	ESC	Z	n1	n2	Data
Decimal:	27	90	n1	n2	Data
Hexadecimal:	1B	5A	n1	n2	Data

Parameters

$0 \leq n1 \leq 255, 0 \leq n2 \leq 7$

The data contains $n1 + n2 * 256$ bytes of image data.

Description

Specifies that an 8-bit quadruple-density bit image is printed with the number of dot positions indicated by n1 and n2.

- Same behavior as M=3 specified in ESC *.
- Horizontally neighboring dots are not omitted.

5.9 Advanced commands

ESC i B Barcode

ASCII:	ESC	i [Parameters]	B or b [Barcode data]	Backslash
Decimal:	27	105 [Parameters]	66 or 98 [Barcode data]	92
Hexadecimal:	1B	69 [Parameters]	42 or 62 [Barcode data]	5C
Format:	ESC	i <u>[Parameters]</u>	<u>B or b [Barcode data]</u>	<u>[Backslash]</u>
		(1)	(2) (3)	(4)

Parameters**(1) [Parameters]: Barcode parameters**

T or t (type)	t0: CODE39 t1: ITF (I-2/5) t5: EAN-8, EAN-13, UPC-A t6: UPC-E t9: CODABAR ta: CODE128 tb: GS1-128 (UCC/EAN-128) tc: RSS symbols td: CODE93 te: POSTNET tf: UPC/EAN EXTENSION tg: MSI
s (style)	Ignored
p (number of passes)	Ignored
R or r (characters below barcode)	r0: OFF r1: ON
u (units of measurement)	Ignored
x (horizontal position)	Ignored
y (vertical offset)	Ignored

h (height)	<p>h n1 n2 Height=$n1+n2*256$ (dots) $48 \leq \text{height} \leq 480$ If height<48, height=48. If height>480, height=480.</p> <p>However, the height is as shown below with tc.</p> <p>131≤height≤832 (RSS-14 Standard) 71≤height≤832 (RSS-14 Truncated) 71≤height≤832 (RSS-14 Stacked) 239≤height≤832 (RSS-14 Stacked Omni) 62≤height≤832 (RSS Limited) 134≤height≤832 (RSS Expanded) If height<min., height=min. If height>max., height=max.</p>
w (width)	<p>w0: extra small w1: small w2: medium w3: large</p>
E or e (parentheses deletion)	<p>e0: ON e1: OFF</p>
o (RSS symbols model)	<p>o0: RSS-14 Standard o1: RSS-14 Truncated o2: RSS-14 Stacked o3: RSS-14 Stacked Omnidirectional o4: RSS Limited o5: RSS Expanded Standard o6: RSS Expanded Stacked</p>
c (number of horizontal characters for RSS Expanded Stacked)	<p>c: o. of horizontal characters This must be an even value where $2 \leq \text{no. of horizontal characters} \leq 20$.</p>
z (ratio between thick and thin bars)	<p>z0: (3:1) z1: (2.5:1) z2: (2:1)</p>
f (equalize bar lengths)	<p>f0: OFF f1: ON</p>

(A barcode with a large number of stacked rows may be considered out of specifications and unreadable by the reader.)

Note

- * For parameter numerals 0–9, both 00h–09h and 30h–39h are recognized.
- * The parameter types a, b, c, d, e, f and g are recognized even when uppercase.
- * The parameter “parentheses deletion” is available only when GS1-128 (UCC/EAN-128) is selected.
- * The parameter “ratio between thick and thin bars” is available only when t0, t1 or t9 is selected.
- * The parameter “equalize bar lengths” is available only when t5 or t6 is selected.
- * If any other type is selected, these parameters are ignored.
- * When there is no type command or an invalid type command has been specified, CODE39 is specified.
- * The number of characters that can be entered for each barcode type is as follows:
 - t0: 1–50 characters (“*” is not included)
 - t1: 1–64 characters
 - t5: 7 characters (for EAN-8)
12 characters (for EAN-13)
11 characters (for UPC-A)
 - t6: 6 characters
 - t9: 3–64 characters (Must begin and end with A, B, C, or D.)
 - ta: 1–64 characters
 - tb: 1–64 characters
 - tc: 3–15 characters (begins with “01”) (except with RSS Expanded)
1–64 numbers or 1–40 letters* (for RSS Expanded)
* ISO646 characters can be printed.
(numbers, letters, spaces, !, ", %, &, ', (,), *, +, ,, -, ., /, :, ;, <, =, >, ? and _)
 - td: 1–64 characters
 - te: 5 characters, 9 characters, 11 characters
 - tf: 2 characters, 5 characters
 - tg: 1–14 characters

(2) B or b: Beginning of barcode data**(3) [Barcode data]: Barcode data**

? (Generate check digit):

Generates a check digit when “?” is in the barcode data.

The position of “?” is irrelevant as long as it is within the barcode data.

With POSTNET, CODE93, UPC/EAN EXTENSION, CODE128 and GS1-128(UCC/EAN-128), no check digit is generated.

If “?” is inserted, it is treated as barcode data.

(4) [Backslash]: End of barcode

Barcode Type	Command
POSTNET, UPC/EAN EXTENTION, CODE39, ITF(I-2/5), EAN-8, EAN-13, UPC-A, UPC-E, CODABAR, RSS symbols, MSI	ESC i [Parameter] B or b [Barcode data] \
CODE93, CODE128, GS1-128 (UCC/EAN-128)]	ESC i [Parameter] B or b [Barcode data] \\\

Description

- Specifies a barcode image.
- Any data extending beyond the right margin is ignored.
- Since the check digit is generated automatically from the barcode data, the check digit is not sent as barcode data. Since the length of the barcode data is also checked, the data would not be correctly recognized if the check digit data was present.
- With CODE39, ITF (I-2/5), CODABAR, CODE128, GS1-128 (UCC/EAN-128) or RSS Expanded, the buffer length for the barcode image is about 22 cm. A barcode longer than 22 cm will not be printed.
- The characters that can be printed with CODE128 and GS1-128 (UCC/EAN-128) are the 128 ASCII characters and the special codes FNC1, FNC2, FNC3 and FNC4.

Codes assigned to the special codes:

FNC1: 86h

FNC2: 81h

FNC3: 80h

FNC4: 84h

- The control codes and special codes appear as spaces when characters are printed below CODE128 and GS1-128 (UCC/EAN-128) barcodes.
- Special code FNC1 can also be printed with RSS Expanded.

This special code also appears as a space when characters are printed below the barcode.

Code assigned to the special code:

FNC1: 86h

- With only UPC/EAN EXTENSION, the data is printed above the barcode..

Example

For barcode type CODE39, with no characters printed below the barcode, a size of large (width) × 480 dots (height), without parentheses, a ratio between thick and thin bars of 3:1, and bar lengths not equalized, the command will be as shown below.

```
ESC i t0 r0 w3 h E0h 01h e0 z0 f1 B 123456789 \
```

ESC i Q 2D barcode (QR Code)

ASCII:	ESC	i	Q or q	Data
Decimal:	27	105	81 or 113	Data
Hexadecimal:	1B	69	51 or 71	Data
Format:	ESC	i	Q or q	<u>[Parameters]</u> <u>[Barcode data]</u> <u>\\</u>
			(1)	(2) (3)

Parameters**(1) [Parameters]**

Unlike with 1D barcodes, all parameters must be specified in order, starting from the top.

If a value other than those listed is entered for a parameter, that parameter is specified with its default value.

1. Cell size	[1-byte decimal] 1 [1-byte decimal] 2 [1-byte decimal] 3 [1-byte decimal] 4 [1-byte decimal] 5 [1-byte decimal] 6 [1-byte decimal] 8 [1-byte decimal] 10	Specifies the dot size per cell side. Prints 1 dot per cell side. Prints 2 dots per cell side. Prints 3 dots per cell side. (default value) Prints 4 dots per cell side. Prints 5 dots per cell side. Prints 6 dots per cell side. Prints 8 dots per cell side. Prints 10 dots per cell side.
2. Symbol type	[1-byte decimal] 1 [1-byte decimal] 2 [1-byte decimal] 3	Model 1 Model 2 (default value) Micro QR
3. Structured Append setting	[1-byte decimal] 0 [1-byte decimal] 1	Not partitioned. (default value) Partitioned (*1)
4. Code number	[1-byte decimal] 1–16	Indicates the number of the symbol in a partitioned QR Code.
5. Number of partitions	[1-byte decimal] 2–16	Indicates the total number of symbols in a partitioned QR Code.
6. Parity data	[1-byte hexadecimal] 00-FF	Value (in bytes) of exclusively OR'ing all the print data (print data before partition)
7. Error correction level	[1-byte decimal] 1 [1-byte decimal] 2 [1-byte decimal] 3 [1-byte decimal] 4	High-density level: L 7% Standard level: M 15% (default value) High-reliability level: Q 25% Ultra-high-reliability level: H 30% (*2)
8. Data input method	[1-byte decimal] 0 [1-byte decimal] 1	Auto input (default value) Manual input Selects whether numbers, English alphanumeric characters, kanji characters or binary characters are entered.

(*1) With Micro QR, the Structured Append setting is invalid, and the default setting is used.

(*2) With Micro QR, error correction level 4 is invalid, and the default setting is used.

(*3) Some barcode readers cannot recognize a barcode with the cell size specified as 1 dot or 2 dots.

What is the QR Code Structured Append setting?

QR Codes have Structured Append settings.

A long character string can be partitioned into 2 to 16 partitions and printed.

With ESC/P commands, it is necessary to enter only the number of partitions.

For example, if the print data is partitioned into 3 partitions, the barcode data is as follows:

```
ESC i Q or q [1st parameter] [1st set of barcode data] \\
ESC i Q or q [2nd parameter] [2nd set of barcode data] \\
ESC i Q or q [3rd parameter] [3rd set of barcode data] \\
```

Refer to the following for specifying settings for 3 through 6 in [Parameters].

3. Structured append setting: This determines whether or not the barcode data is partitioned. If the data is not partitioned, enter 0.
When not partitioning, the values of 4 (code number), 5 (number of partitions), and 6 (parity data) are ignored; therefore, enter 0 as a dummy value for these parameters.
4. Code number: This indicates which number the ESC/P command for that QR Code is.
For example, if it is for the second of four partitions, this is 2; for the fourth this is 4.
5. Number of partitions: This is the number of partitions.
6. Parity data: This is the value (in bytes) of exclusively OR'ing all the print data (print data before partition). Entering the same value as for the partitioned QR Code ESC/P command indicates that these codes are linked.

What is exclusive OR'ing in bytes?

The data is exclusively OR'ed (XOR'ed) in bytes and in order.

For example, putting a character string into hexadecimal gives 31h, 32h, 33h, 34h.

Character	OR'ed (XOR'ed) in bytes	Results
XOR of 31h and 32h	0011 0001 ^= 0011 0010	0000 0011 (03h)
↓		
XOR of 03h and 33h	0000 0011 ^= 0011 0011	0011 0000 (30h)
↓		
XOR of 30h and 34h	0011 0000 ^= 0011 0100	0000 0100 (04h) Therefore, the parity is 04h.

Note

If this parity value is incorrect, the correct QR Code is not generated.

Summary

Printing the character string “123456789” with a cell size of 4 dots, Model 2, standard error correction level, and automatic data input

Without Structured Append	ESC i Q 04h 02h 00h 00h 00h 00h 02h 00h “123456789” \\\
With Structured Append [Three partitions]	ESC i Q 04h 02h 01h 01h 03h 31h 02h 00h “123” \\\ ESC i Q 04h 02h 01h 02h 03h 31h 02h 00h “456” \\\ ESC i Q 04h 02h 01h 03h 03h 31h 02h 00h “789” \\\ (The parity for the character string “123456789” is 31h.)

(2) [Barcode data]: Barcode data

When manual input is selected in 8 (data input method), the barcode data must be preceded with one of the following single-byte alphanumeric characters.

Barcode Type	Preceded Character	Example
Number input	N or n	-
Alphanumeric character input	A or a	ESC i Q [other parameters] 1 A012345678aBcDe \\\
Kanji character input	K or k	ESC i Q [other parameters] 1 K kanji character input \\\
Binary character input	B or b+4-digit number	ESC i Q [other parameters] 1 B0005##### \\\ With the “4-digit number”, specify the number of binary characters to actually be entered. For example, if 12 binary characters are to be entered, specify: B 0012 (30h, 30h, 31h, 32h)

The number of barcode data characters that can be entered depends on the model type and the input method.

Model 1	707 English alphanumeric characters, 1167 numbers, 486 binary bytes, 299 kanji characters
Model 2	4296 English alphanumeric characters, 7089 numbers, 2953 binary bytes, 1817 kanji characters
Micro QR	21 English alphanumeric characters, 35 numbers, 15 binary bytes, 9 kanji characters

Note

The numbers listed above are for an error correction level at a high-density level (L 7%).

If the standard level or higher is set, the number of characters that can be entered may decrease. In addition, even if the characters are entered with the high-density level (L) specified, the number of characters that can be entered may decrease due to compression.

(3) \\\: End of barcode

There must be three backslashes to end 2D barcode.

Example

Refer to the section "[Summary](#)".

ESC i P Specify QR Code version

ASCII:	ESC	i	P	n
Decimal:	27	105	80	n
Hexadecimal:	1B	69	50	n

Parameters

$0 \leq n \leq 40$

Description

- The barcode size can be fixed.
- The default value is 0.
- The available versions differ depending on the symbol type used.

If a setting other than those listed is specified, the setting returns to its default.

The following settings are available for each symbol type.

Model1 (0–14), Model2 (0–40), MicroQR (0–4)

ESC i V 2D barcode (PDF417)

ASCII:	ESC	i	V or v	Data
Decimal:	27	105	86 or 118	Data
Hexadecimal:	1B	69	56 or 76	Data
Format:	ESC	i	V or v	<u>[Parameters]</u> <u>[Barcode data]</u> <u>\\</u>
				(1) (2) (3)

Parameters**(1) [Parameters]**

Unlike with 1D barcodes, all parameters must be specified in order, starting from the top.

If a value other than those listed is entered for a parameter, that parameter is specified with its default value.

1. Cell size	[1-byte decimal] 1 [1-byte decimal] 2 [1-byte decimal] 3 [1-byte decimal] 4 [1-byte decimal] 5 [1-byte decimal] 6 [1-byte decimal] 8 [1-byte decimal] 10	Specifies the dot size per cell side. Prints 1 dot per cell side. Prints 2 dots per cell side. Prints 3 dots per cell side. (default value) Prints 4 dots per cell side. Prints 5 dots per cell side. Prints 6 dots per cell side. Prints 8 dots per cell side. Prints 10 dots per cell side.
2. Symbol type	[1-byte decimal] 0 [1-byte decimal] 1 [1-byte decimal] 2 [1-byte decimal] 3	Standard (default value) Truncate MicroPDF417 standard MicroPDF417 Code128 emulation
3. Data input method	[1-byte decimal] 0 [1-byte decimal] 1	Auto input (default value) Binary input
4. Error correction capacity-type	[1-byte decimal] 0 [1-byte decimal] 1	Level input setting (default value) Percentage input setting
5. Error correction capacity-value		
- Level input	[2-byte decimal] 0–8	Specifies the level. (The default value is 0.)
- Percentage input	[2-byte decimal] 0–400	Specifies the percentage. (The default value is 10.)
6. Symbol size (X direction)	[1-byte decimal] 0 [1-byte decimal] 1–30 *0 and 1–4 with MicroPDF417	Auto setting (default value) Manual settings
7. Symbol size (Y direction)	[1-byte decimal] 0 [1-byte decimal] 3–90 *0 and 4–44 with MicroPDF417	Auto setting (default value) Manual settings

8. Aspect value	[2-byte decimal] 1–1000	Specifies the aspect value. Actually, this is 0.01–10.0, but since the decimal point cannot be entered, a value multiplied by 100 is entered. The default value is 50. (The actual value is 0.5.)
-----------------	-------------------------	---

Note

- * Some barcode readers cannot recognize a barcode with the cell size specified as 1 dot or 2 dots.
- * If a setting for the symbol size (X direction) or symbol size (Y direction) has been specified manually, the aspect value setting is ignored.
- * If a setting for the symbol size (X direction) or the symbol size (Y direction) has been entered manually, the bar code may not be printed or an unreadable bar code may be printed.
- * If both a large cell size and a high level error correction capacity have been specified, printing may not be possible due to a full print buffer.

[With symbol type MicroPDF417]

- * Since the error correction capacity is automatically determined from the symbol size (X direction) setting, the settings for “error correction capacity and type” and “error correction capacity-value” are ignored.
- * The aspect value setting is ignored.
- * The following table shows the values available for the symbol size (Y direction) according to the symbol size (X direction) setting. If an invalid setting is specified for the symbol size (Y direction), the default setting is specified.

Symbol Size (X Direction)	Symbol Size (Y Direction)											
Auto	Auto											
1	Auto	11	14	17	20	24	28					
2	Auto	8	11	14	17	20	23	26				
3	Auto	6	8	10	12	15	20	26	32	38	44	
4	Auto	4	6	8	10	12	15	20	26	32	38	44

(2) Barcode data

The numbers of barcode data characters that can be entered are as follows.

1850 alphanumeric characters, 2710 numbers, 1108 binary bytes

Note

The numbers listed above are for an error correction level at a high-density level (L 7%). If the standard level or higher is set, the number of characters that can be entered may decrease. In addition, even if the characters are entered with the high-density level (L) specified, the number of characters that can be entered may decrease due to compression.

[With symbol type MicroPDF417]

Maximum of 250 alphanumeric characters, maximum of 366 numbers, maximum of 150 bytes of binary data

However, the following table shows the maximum amount of information allowed according to the settings for symbol size (X direction) and symbol size (Y direction).

X	Y	Maximum Amount of Information Allowed		
		Alphanumeric Characters	Numbers	Binary
1	11	6	8	3
1	14	12	17	7
1	17	18	26	10
1	20	22	32	13
1	24	30	44	18
1	28	38	55	22
2	8	14	20	8
2	11	24	35	14
2	14	36	52	21
2	17	46	67	27
2	20	56	82	33
2	23	64	93	38
2	26	72	105	43
3	6	10	14	6
3	8	18	26	10
3	10	26	38	15
3	12	34	49	20
3	15	46	67	27
3	20	66	96	39
3	26	90	132	54
3	32	114	167	68
3	38	138	202	82
3	44	162	237	97
4	4	14	20	8
4	6	22	32	13
4	8	34	49	20
4	10	46	67	27
4	12	58	85	34
4	15	76	111	45
4	20	106	155	63
4	26	142	208	85
4	32	178	261	106
4	38	214	313	128
4	44	250	366	150

(3) \\\: End of barcode

There must be three backslashes to end 2D barcodes.

ESC i D 2D barcode (DataMatrix)

ASCII:	ESC	i	D or d	data
Decimal:	27	105	68 or 100	data
Hexadecimal:	1B	69	44 or 64	data
Format:	ESC	i	D or d	<u>[Parameters]</u> <u>[Barcode data]</u> <u>\\\</u>
			(1)	(2) (3)

Parameters**(1) [Parameters]**

Unlike with 1D barcodes, all parameters must be specified in order, starting from the top.

If a value other than those listed is entered for a parameter, that parameter is specified with its default value.

1. Cell size	[1-byte decimal] 1 [1-byte decimal] 2 [1-byte decimal] 3 [1-byte decimal] 4 [1-byte decimal] 5 [1-byte decimal] 6 [1-byte decimal] 8 [1-byte decimal] 10	Specifies the dot size per cell side. Prints 1 dot per cell side. Prints 2 dots per cell side. Prints 3 dots per cell side. (default value) Prints 4 dots per cell side. Prints 5 dots per cell side. Prints 6 dots per cell side. Prints 8 dots per cell side. Prints 10 dots per cell side.
2. Symbol type	[1-byte decimal] 0 [1-byte decimal] 1	ECC200 square (default value) ECC200 rectangular
3. Vertical size	[1-byte decimal] 0 [1-byte decimal] 10 [1-byte decimal] 12 [1-byte decimal] 14 [1-byte decimal] 16 [1-byte decimal] 18 [1-byte decimal] 20 [1-byte decimal] 22 [1-byte decimal] 24 [1-byte decimal] 26 [1-byte decimal] 32 [1-byte decimal] 36 [1-byte decimal] 40 [1-byte decimal] 44 [1-byte decimal] 48 [1-byte decimal] 52 [1-byte decimal] 64 [1-byte decimal] 72 [1-byte decimal] 80 [1-byte decimal] 88 [1-byte decimal] 96 (continued to the next page)	[ECC200 square] Vertical no. of cells: AUTO (default value) Vertical no. of cells: 10 cells Vertical no. of cells: 12 cells Vertical no. of cells: 14 cells Vertical no. of cells: 16 cells Vertical no. of cells: 18 cells Vertical no. of cells: 20 cells Vertical no. of cells: 22 cells Vertical no. of cells: 24 cells Vertical no. of cells: 26 cells Vertical no. of cells: 32 cells Vertical no. of cells: 36 cells Vertical no. of cells: 40 cells Vertical no. of cells: 44 cells Vertical no. of cells: 48 cells Vertical no. of cells: 52 cells Vertical no. of cells: 64 cells Vertical no. of cells: 72 cells Vertical no. of cells: 80 cells Vertical no. of cells: 88 cells Vertical no. of cells: 96 cells

3. Vertical size (continued)	(continued from the previous page) [1-byte decimal] 104 [1-byte decimal] 120 [1-byte decimal] 132 [1-byte decimal] 144 [1-byte decimal] 0 [1-byte decimal] 8 [1-byte decimal] 12 [1-byte decimal] 16	Vertical no. of cells: 104 cells Vertical no. of cells: 120 cells Vertical no. of cells: 132 cells Vertical no. of cells: 144 cells [ECC200 rectangular] Vertical no. of cells: AUTO (default value) Vertical no. of cells: 8 cells Vertical no. of cells: 12 cells Vertical no. of cells: 16 cells
4. Horizontal size	[1-byte decimal] x [1-byte decimal] 0 [1-byte decimal] 18 [1-byte decimal] 32 [1-byte decimal] 26 [1-byte decimal] 36 [1-byte decimal] 36 [1-byte decimal] 48	[ECC200 square] Horizontal no. of cells: Same value as vertical size (x) [ECC200 rectangular] (1) When the vertical size is AUTO Horizontal no. of cells: AUTO (default value) (2) When the vertical size is 8 cells Horizontal no. of cells: 18 cells Horizontal no. of cells: 32 cells (3) When the vertical size is 12 cells Horizontal no. of cells: 26 cells Horizontal no. of cells: 36 cells (4) When the vertical size is 16 cells Horizontal no. of cells: 36 cells Horizontal no. of cells: 48 cells
5. Reserved	[1-byte decimal]×5 0	5 bytes of dummy data (0) is sent.

Note

Some barcode readers cannot recognize a barcode with the cell size specified as 1 dot or 2 dots.

If the vertical size is specified as a value other than those listed for ECC200 square, the AUTO setting is selected. If the horizontal size is specified as a value different from the vertical size, the setting is changed to the same value as the horizontal size.

If the vertical or horizontal size for ECC200 rectangular is specified as a value other than those listed, the AUTO setting is selected.

(2) [Barcode data]: Barcode data

The maximum number of barcode data characters that can be entered is listed below.

2335 alphanumeric characters, 3116 numbers, 1556 bytes of binary data

Note

The numbers of characters that can be entered (as listed above) are for the maximum vertical × horizontal cell settings (144 cells × 144 cells). The number of characters that can be entered may decrease, depending on the specified settings.

(3) \\\: End of barcode

There must be three backslashes to end 2D barcodes.

Example

For data “12345” with symbol type ECC square at 40 × 40 with a 3-dot cell size, the command will be as shown below.

```
ESC i D 03h 00h 28h(40d) 28h 00h 00h 00h 00h 00h “12345” \\\
```


ESC i M 2D barcode (MaxiCode)

ASCII:	ESC	i	M or m	data
Decimal:	27	105	77 or 109	data
Hexadecimal:	1B	69	4D or 6D	data
Format:	ESC	i	M or m	<u>[Parameters]</u> \ <u>[Barcode data]</u> \
			(1)	(2) (3) (4)

Parameters**(1) [Parameters]**

If a value other than those listed is entered for a parameter, that parameter is specified with its default value.

1. Symbol type	[1-byte decimal]	0	Standard (default value)
	[1-byte decimal]	1	Full EEC
	[1-byte decimal]	2	Structured carrier message
2. Structured Append setting	[1-byte decimal]	0	With Structured Append (default value)
	[1-byte decimal]	1	Without Structured Append

(2) \ (backslash)

Separator between parameters and barcode data

(3) [Barcode data]: Barcode data

The number of barcode data characters that can be entered is listed below.

Symbol Type	Maximum Amount of Information Allowed	
	Alphanumeric Characters	Numbers
Standard	93	138
Full EEC	77	113
Structured carrier message	84	126


Note

The numbers of characters that can be entered (as listed above) are for when using only the common character set (code set A in the MaxiCode specifications). The number of characters that can be entered may decrease, depending on the characters that are used.

When the symbol type is the structured carrier message, the service class, country code and postal code can be specified separately from the normal data. Specify each value, separated by a backslash and comma (\,), immediately before the normal data.

<postal_code>\,<country_code>\,<service_class>\,<normal_barcode_data>

When “\,” is not used three times, the data is written as shown in the following example.

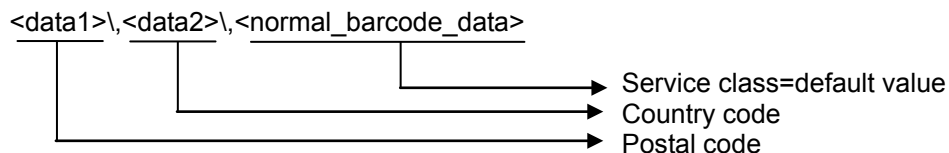

If a value other than those listed is entered for a parameter, that parameter is specified with its default value.

Postal code	9 or less numbers, or 6 or less alphanumeric characters	Ignored when not structured carrier message. Default value: 000000000
Country code	3 or less numbers	Ignored when not structured carrier message. Default value: 000
Service class	3 or less numbers	Ignored when not structured carrier message. Default value: 000

Note

If the postal code is specified as alphanumeric characters, characters other than those listed below are invalid.

A to Z “ # \$ % & ‘ () * + , - . / 0 to 9 :

However, lowercase letters (a to z) are converted to the valid uppercase letters (A to Z).

(4) \\\: End of barcode

There must be three backslashes to end 2D barcodes.

ESC i J 2D barcode (Aztec)

ASCII:	ESC	i	J or j	data
Decimal:	27	105	74 or 106	data
Hexadecimal:	1B	69	4A or 6A	data
Format:	ESC	i	J or j	<u>[Parameters]</u> <u>[Barcode data]</u> <u>\\</u>
				(1) (2) (3)

Parameters**(1) [Parameters]**

If a value other than those listed is entered for a parameter, that parameter is specified with its default value.

1. Cell size	[1-byte decimal] 1 [1-byte decimal] 2 [1-byte decimal] 3 [1-byte decimal] 4 [1-byte decimal] 5 [1-byte decimal] 6 [1-byte decimal] 8 [1-byte decimal] 10	Specifies the dot size per cell side. Prints 1 dot per cell side. Prints 2 dots per cell side. Prints 3 dots per cell side. (default value) Prints 4 dots per cell side. Prints 5 dots per cell side. Prints 6 dots per cell side. Prints 8 dots per cell side. Prints 10 dots per cell side.
2. Symbol type	[1-byte decimal] 0 [1-byte decimal] 1 [1-byte decimal] 2	Full range (default value) Compact Auto setting
3. Error correction capacity	[1-byte decimal] 1–99	[Percentage (default value is 23)]
4. Symbol size	[Full range] [1-byte decimal] 0 [1-byte decimal] 4–32 [Compact] [1-byte decimal] 0 [1-byte decimal] 1–4	Auto setting (default value) Manual settings Auto setting (default value) Manual settings
	Note: Symbol size is fixed as AUTO when Symbol type is specified as AUTO.	
5. Structured Append setting	[1-byte decimal] 0 [1-byte decimal] 1 [1-byte decimal] 2	Not partitioned. (default value) Partitioned Partitioned Specify the number of blocks
6. Number of blocks	[1-byte decimal] 2–26	Partitioned Only valid when the number of blocks is specified (Default it 2)
7. Message ID	Character string (Terminal value is 00h)	Invalid when append setting 0.

(2) [Barcode data]: Barcode data

The maximum number of barcode data characters that can be entered is listed below.

3067 alphanumeric characters, 3832 numbers, 1914 bytes of binary data

Note

The number of characters shown above is only for the Full-Range mode and varies depending on setting.

(3) \\\: End of barcode

There must be three backslashes to end 2D barcodes.

ESC i G Specify font setting

ASCII:	ESC	i	G	n1	n2	data
Decimal:	27	105	71	n1	n2	data
Hexadecimal:	1B	69	47	n1	n2	data

Parameters

n1: 0 (Fixed)

 $1 \leq n2 \leq 16$ **Description**

● Specify font

n2: Specify the length of character string of specified font name.

Data: Character string of font name.

Example

For specifying "HelOb.FNT".

ESC i G 00h 09h HelOb.FNT

ESC i F Print downloaded data

ASCII:	ESC	i	F	P	n
Decimal:	27	105	70	80	n
Hexadecimal:	1B	69	46	50	n


Parameters

n: Minus 1 from the key number assigned when transport the data.

$0 \leq n \leq 254$


Description

- Print a transferred image on a current print position.
- If there is no image data, this command is ignored.

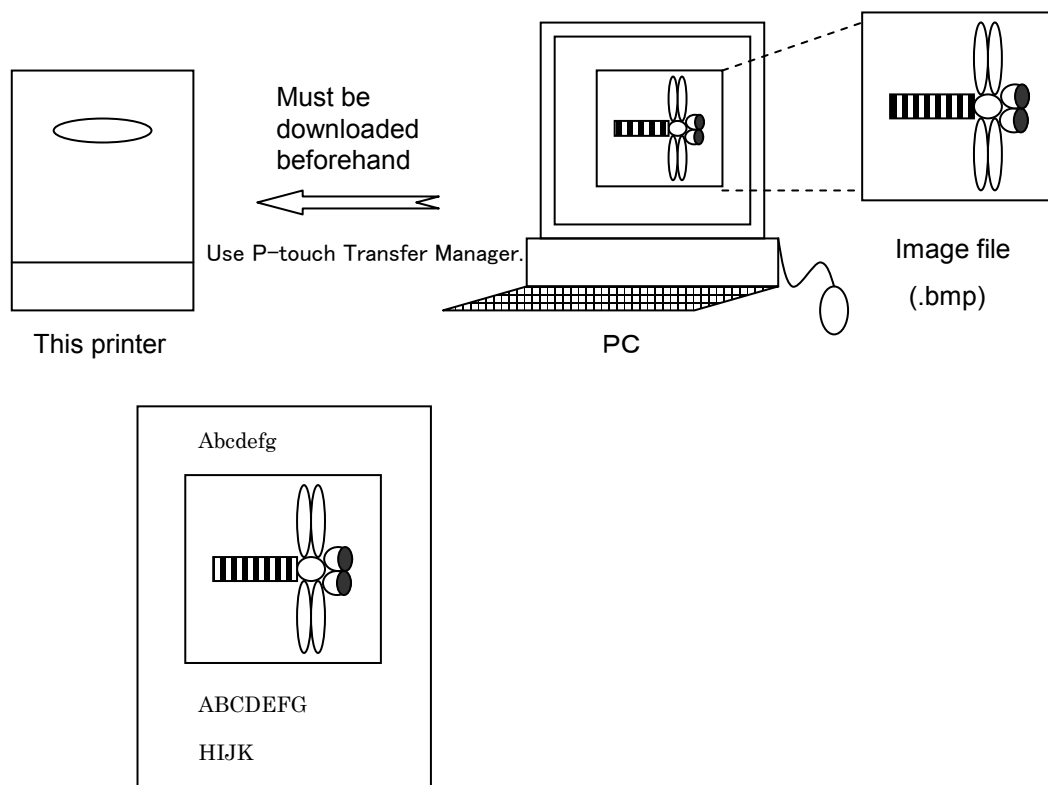


Example: Combination of text and downloaded image

- As with text, if the image data does not all fit on the current line, an automatic line feed is performed, and the data is placed at the beginning of the next line. At that time, the any data that does not fit in the print area is deleted.

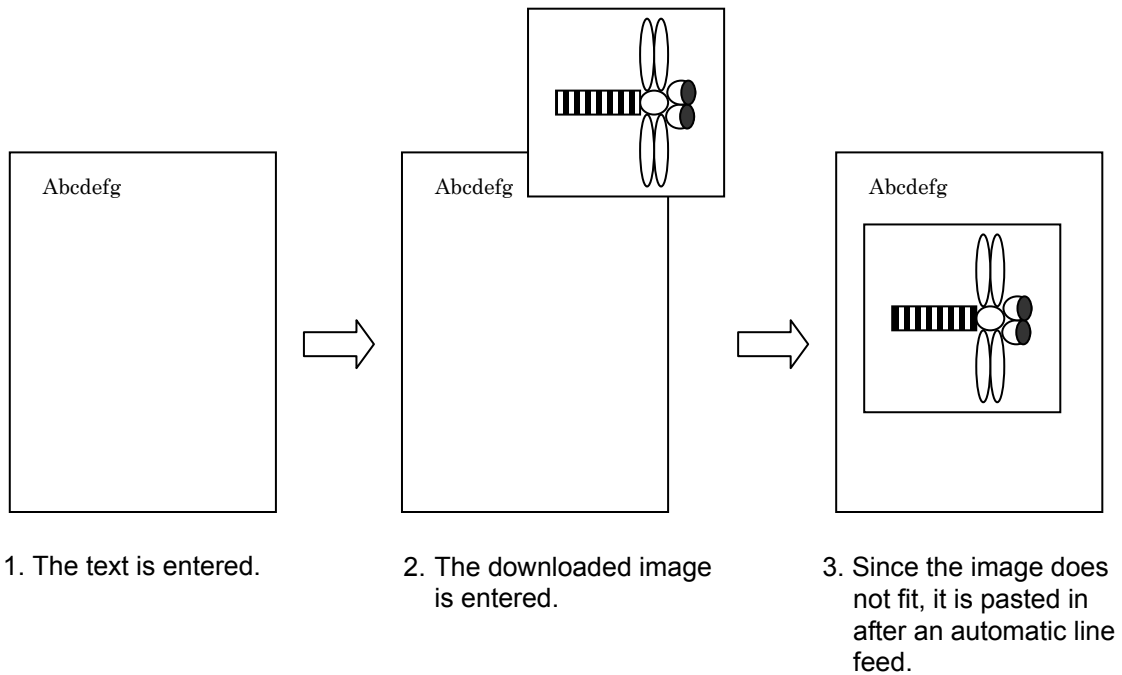


Example: Normal size

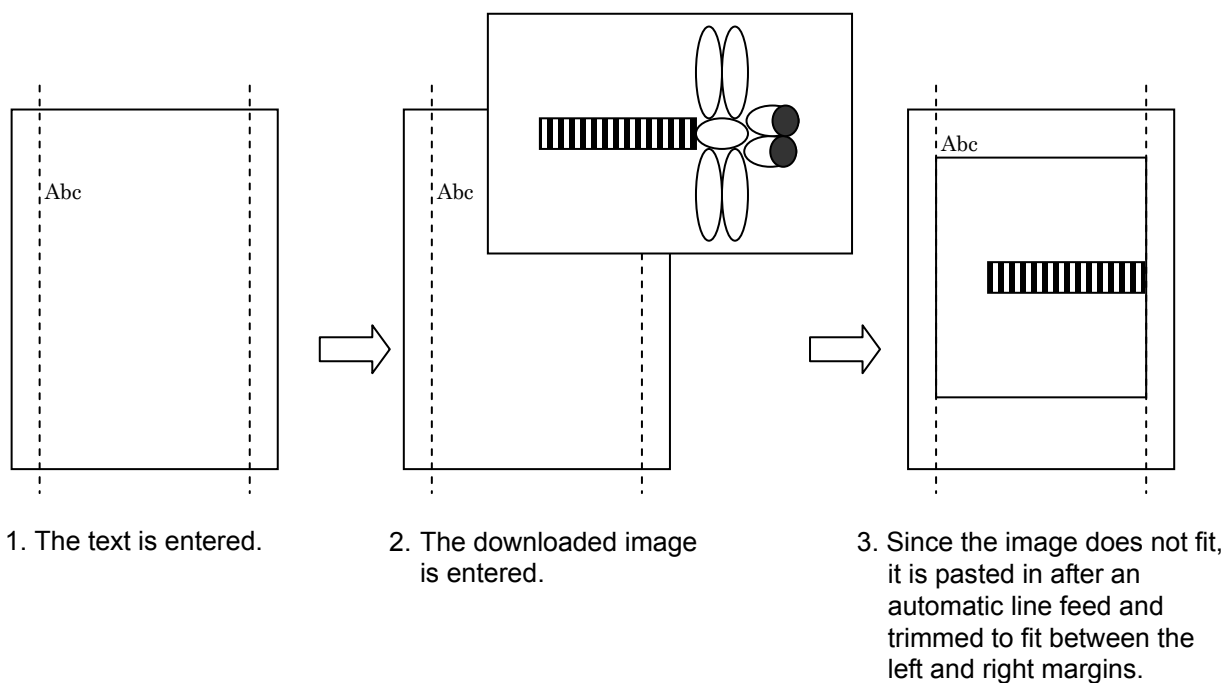

Example: Image larger than the distance between left and right margins

- If the result of pasting in the downloaded image extends beyond the bottom margin position, the image is pasted in after a page feed. However, if the downloaded image is larger than the entire area between the top and bottom margins, the entire image is ignored.

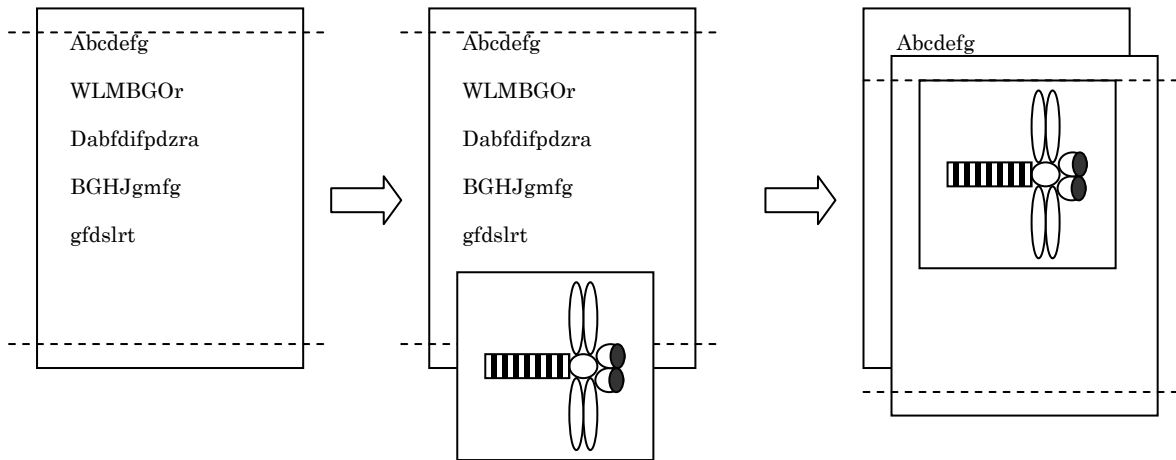


1. The text is entered.

2. The downloaded image is entered.

3. Since the image does not fit, it is pasted in after an automatic page feed.

Example: Image smaller than the distance between the top and bottom margins

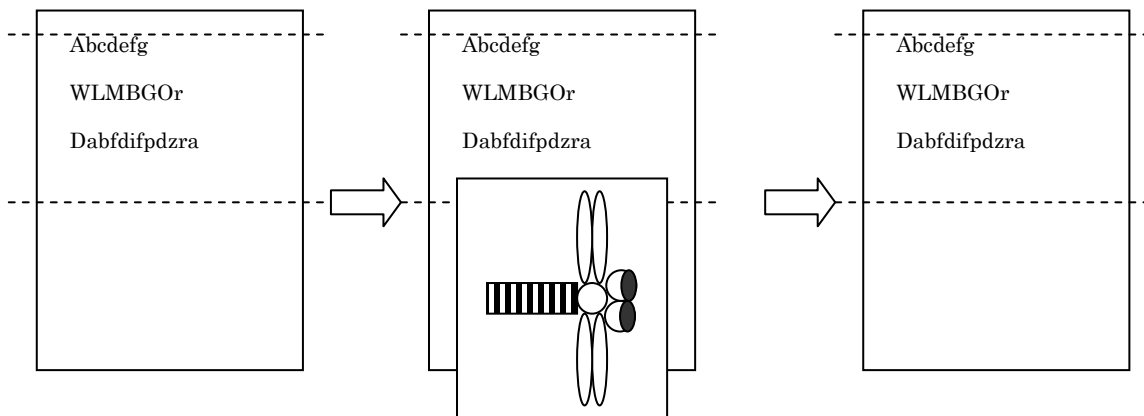

1. The text is entered.

2. The downloaded image is entered.

3. The entire image is ignored.

Example: Image larger than the distance between top and bottom margins

- An image data used by “ESC i F” has to be registered into a printer first. Use P-touch Transfer Manager for transferring the BMP file to a printer for image data registration. A maximum size of memory is 6MB so that the total size of storable data has to be equal to or less than 6MB.
- Image data larger than the media size is handled by deleting the portion of the image that does not fit within the size of the media.

The portion of image data deleted depends on the media orientation.

ESC i a Switch command mode

ASCII:	ESC	i	a	n
Decimal:	27	105	97	n
Hexadecimal:	1B	69	61	n

Parameters

- n: Command mode
- 0 or 48: ESC/P Legacy / Raster mode
- 3 or 51: P-touch Template mode
- 4 or 52 ESC/P Brother mode

Description

- Switches the command mode to ESC/P Legacy / Raster mode, P-touch Template mode and ESC/P Brother mode.
- Dynamically switches between the 3 modes.
- Since this is a dynamic command, after the printer is turned off and on again, the setting returns to the previously setting.

ESC i S Status information request

ASCII:	ESC	i	S
Decimal:	27	105	83
Hexadecimal:	1B	69	53

Parameters

None

Description

- Sends a requests for the printer status.

The printer status consists of 32 bytes.

Order	Offset	Size	Name	Value/Standard
1	0	1	Print head mark	Fixed at 80h
2	1	1	Size	Fixed at 20h
3	2	1	Brother code	Fixed at "B" (42h)
4	3	1	Series code	Fixed at "6" (36h)
5	4	1	Model code	PJ-722: Fixed at "6" (36h) PJ-723: Fixed at "7" (37h) PJ-762: Fixed at "8" (38h) PJ-763: Fixed at "9" (39h) PJ-763MFi: Fixed at "A" (41h) PJ-773: Fixed at "B" (42h)
6	5	1	Country code	Fixed at "0" (30h)
7	6	1	Battery level information	Refer to table (5) below.
8	7	1	Not used	Fixed at 00h
9	8	1	Error information 1	Refer to table (1) below.
10	9	1	Error information 2	Refer to table (2) below.
11	10	1	Media width	Refer to table (6) below.
12	11	1	Media type	Refer to table (3) below.
13	12	1	Number of colors	Fixed at 00h
14	13	1	Media length (higher order bytes)	Fixed at 00h
15	14	1	Media sensor value	Not used
16	15	1	Mode	Fixed at 01h
17	16	1	Density	Fixed at 00h
18	17	1	Media length (lower order bytes)	Fixed at 00h
19	18	1	Status type	Refer to table (4) below.
20	19	1	Phase type	Refer to table (7) below.
21	20	1	Phase number (higher order bytes)	Fixed at 00h
22	21	1	Phase number (lower order bytes)	Fixed at 00h
23	22	1	Notification number	Not used
24	23	1	Expansion area (number of bytes)	Fixed at 00h
25	24	8	Reserved	Fixed at 00h

(1) Error information 1

Flag	Mask	Meaning
Bit 0	01h	Not used
Bit 1	02h	Not used
Bit 2	04h	Not used
Bit 3	08h	Not used
Bit 4	10h	Printer in use
Bit 5	20h	Printer turned off
Bit 6	40h	Not used
Bit 7	80h	Not used

(2) Error information 2

Flag	Mask	Meaning
Bit 0	01h	Not used
Bit 1	02h	Not used
Bit 2	04h	Communication error
Bit 3	08h	Not used
Bit 4	10h	Not used
Bit 5	20h	Not used
Bit 6	40h	Not used
Bit 7	80h	Not used

(3) Media type

Media Type	Value	Remarks
No Paper	00h	
Loaded Paper	01h	

(4) Status type

Status Type	Value	Remarks
No Error	00h	
(Not used)	01h	
Error occurred	02h	
(Not used)	03h - FFh	

(5) Battery level information

Flag	Mask	Meaning
Bit 0	00h	Full battery
Bit 1	01h	Half battery
Bit 2	02h	Low battery
Bit 3	03h	Changing required
Bit 4	04h	AC adapter in use

(6) Media width

Media width	Value	Remarks
No Paper	00h	
Loaded Paper	D2h	

(7) Phase type

Phase type	Value	Remarks
Idle	00h	
Printing	01h	

ESC i L Specify landscape orientation


ASCII:	ESC	i	L	n
Decimal:	27	105	76	n
Hexadecimal:	1B	69	4C	n

Parameters

n: 0, 1 or 48, 49

Description

- Applies or cancels the landscape orientation
n=1 or 49 ("1"): Applies the landscape orientation.
n=0 or 48 ("0"): Cancels the landscape orientation.
- Using this command clears all text.
- Before entering text, specify the paper orientation with this command.
- The setting specified by "ESC iXL2"(default landscape setting) is valid for the landscape orientation when the printer is turned on.

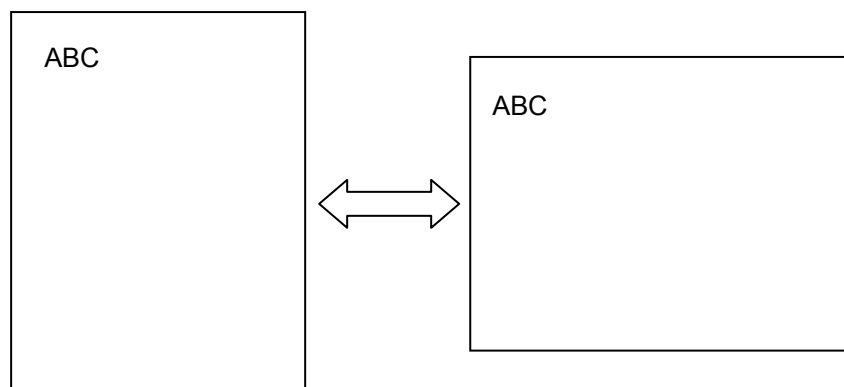

5.10 Advanced static commands

ESC iXQ2 Select default character style

ASCII:	ESC	i	X	Q	2	n1	n2	n3
Decimal:	27	105	88	81	50	n1	n2	n3
Hexadecimal:	1B	69	58	51	32	n1	n2	n3

Parameters

n1: 01h (Fixed)

n2: 00h (Fixed)

00h≤n3≤04h

Description

- Selects the default character style.
 - n3=00h: None (normal characters) (*Manufacturer's default)
 - n3=01h: Bold
 - n3=02h: Outline
 - n3=03h: Shadow
 - n3=04h: Shadow and outline
- This command is a static command.

Remarks

- Invalid if n3 is a value other than 00h through 04h

ESC iXQ1 Retrieve default character style

ASCII:	ESC	i	X	Q	1	n1	n2
Decimal:	27	105	88	81	49	n1	n2
Hexadecimal:	1B	69	58	51	31	n1	n2

Parameters

n1: 00h (Fixed)

n2: 00h (Fixed)

Description

- The default character style setting is returned as 3-byte data.

[1]	01h (Fixed)
[2]	00h (Fixed)
[3]	Setting 00h: None (normal characters) 01h: Bold 02h: Outline 03h: Shadow 04h: Shadow and outline

- The retrieved value is a value specified by a static command.

ESC iXk2 Select default font

ASCII:	ESC	i	X	k	2	n1	n2	n3
Decimal:	27	105	88	107	50	n1	n2	n3
Hexadecimal:	1B	69	58	6B	32	n1	n2	n3

Parameters

n1: 01h (Fixed)

n2: 00h (Fixed)

01h≤n3≤03h, 09h, 0Ah≤n3≤0Bh

Description

- Selects the default font.
 - n3=01h: Letter Gothic Bold (bitmap) (*Manufacturer's default)
 - n3=02h: Brussels (bitmap)
 - n3=03h: Helsinki (bitmap)
 - n3=09h: Letter Gothic Bold (outline)
 - n3=0Ah: Brussels (outline)
 - n3=0Bh: Helsinki (outline)
- This command is a static command.

Remarks

- Invalid if n3 is a value outside of the allowable range

ESC iXk1 Retrieve default font

ASCII:	ESC	i	X	k	1	n1	n2
Decimal:	27	105	88	107	49	n1	n2
Hexadecimal:	1B	69	58	6B	31	n1	n2

Parameters

n1: 00h (Fixed)

n2: 00h (Fixed)

Description

- The default font setting is returned as 3-byte data.

[1]	01h (Fixed)
[2]	00h (Fixed)
[3]	Setting 01h: Letter Gothic Bold (bitmap) 02h: Brussels(bitmap) 03h: Helsinki (bitmap) 09h; Letter Gothic Bold (outline) 0Ah: Brussels(outline) 0Bh: Helsinki (outline)

- The retrieved value is a value specified by a static command.

ESC iXX2 Specify default character size

ASCII:	ESC	i	X	X	2	n1	n2	n3	n4
Decimal:	27	105	88	88	50	n1	n2	n3	n4
Hexadecimal:	1B	69	58	58	32	n1	n2	n3	n4

Parameters

n1: 02h (Fixed)

n2: 00h (Fixed)

00h≤n3≤FFh, 00h≤n4≤01h

Description

- Specifies the default character size.
n3+(n4*256): Default character size (dots)
- The following settings (dots) are valid.
The maximum valid setting is n=400.
*The manufacturer's default is 32.
- This command is a static command.

Remarks

- Invalid if the setting is a value outside of the allowable range

ESC iXX1 Retrieve default character size

ASCII:	ESC	i	X	X	1	n1	n2
Decimal:	27	105	88	88	49	n1	n2
Hexadecimal:	1B	69	58	58	31	n1	n2

Parameters

n1: 00h (Fixed)

n2: 00h (Fixed)

Description

- The default character size setting is returned as 4-byte data.

[1]	02h (Fixed)
[2]	00h (Fixed)
[3, 4]	n3 n4 settings n3+(n4*256): Default character size (dots)

- The retrieved value is a value specified by a static command.

ESC iX32 Specify default line feed

ASCII:	ESC	i	X	3	2	n1	n2	n3	n4
Decimal:	27	105	88	51	50	n1	n2	n3	n4
Hexadecimal:	1B	69	58	33	32	n1	n2	n3	n4

Parameters

n1: 02h (Fixed)

n2: 00h (Fixed)

00h≤n3≤FFh, 00h≤n4≤02h

Description

- Specifies the default line feed.
n3+(n4*256): Default line feed (dots)
*The manufacturer's default is 48.
- Specified length is from 0 to 2 inches.
- This command is a static command.

Remarks

- Invalid if the setting is a value outside of the allowable range

ESC iX31 Retrieve default line feed

ASCII:	ESC	i	X	3	1	n1	n2
Decimal:	27	105	88	51	49	n1	n2
Hexadecimal:	1B	69	58	33	31	n1	n2

Parameters

n1: 00h (Fixed)

n2: 00h (Fixed)

Description

- The default line feed setting is returned as 4-byte data.

[1]	02h (Fixed)
[2]	00h (Fixed)
[3, 4]	n3 n4 settings n3+(n4*256): Default line feed (dots)

- The retrieved value is a value specified by a static command.

ESC iXA2 Select default alignment

ASCII:	ESC	i	X	A	2	n1	n2	n3
Decimal:	27	105	88	65	50	n1	n2	n3
Hexadecimal:	1B	69	58	41	32	n1	n2	n3

Parameters

n1: 01h (Fixed)

n2: 00h (Fixed)

00h≤n3≤02h

Description

- Selects the default alignment.
 - n3=00h: Left alignment (*Manufacturer's default)
 - n3=01h: Center alignment
 - n3=02h: Right alignment
- This command is a static command.

Remarks

- Invalid if n3 is a value outside of the allowable range

ESC iXA1 Retrieve default alignment

ASCII:	ESC	i	X	A	1	n1	n2
Decimal:	27	105	88	65	49	n1	n2
Hexadecimal:	1B	69	58	41	31	n1	n2

Parameters

n1: 00h (Fixed)

n2: 00h (Fixed)

Description

- The default alignment setting is returned as 3-byte data.

[1]	01h (Fixed)
[2]	00h (Fixed)
[3]	Setting 00h: Left alignment 01h: Center alignment 02h: Right alignment

- The retrieved value is a value specified by a static command.

ESC iX(2) Specify default page length

ASCII:	ESC	i	X	(2	n1	n2	n3	n4
Decimal:	27	105	88	40	50	n1	n2	n3	n4
Hexadecimal:	1B	69	58	28	32	n1	n2	n3	n4

Parameters

n1: 02h (Fixed)

n2: 00h (Fixed)

00h≤n3≤FFh, 00h≤n4≤11h (for 203dpi printers)

00h≤n3≤FFh, 00h≤n4≤19h (for 300dpi printers)

Description

- Specifies the default page length.
n3+(n4*256): Default page length (dots)
*A default page length 0 indicates the Auto setting.
*The manufacturer's default is 0.
- Specified length is from 1 to 22 inches.
- This command is a static command.

Remarks

- Invalid if the setting is a value outside of the allowable range

ESC iX(1) Retrieve default page length

ASCII:	ESC	i	X	(1	n1	n2
Decimal:	27	105	88	40	49	n1	n2
Hexadecimal:	1B	69	58	28	31	n1	n2

Parameters

n1: 00h (Fixed)

n2: 00h (Fixed)

Description

- The default page length setting is returned as 4-byte data.

[1]	02h (Fixed)
[2]	00h (Fixed)
[3, 4]	n3 n4 settings n3+(n4*256): Default page length (dots) *A default page length of 0 indicates the Auto setting.

- The retrieved value is a value specified by a static command.

ESC iXL2 Select default landscape orientation

ASCII:	ESC	i	X	L	2	n1	n2	n3
Decimal:	27	105	88	76	50	n1	n2	n3
Hexadecimal:	1B	69	58	4C	32	n1	n2	n3

Parameters

n1: 01h (Fixed)

n2: 00h (Fixed)

00h≤n3≤01h

Description

- Selects the default landscape orientation setting.
 - n3=00h: Cancel landscape orientation (*Manufacturer's default)
 - n3=01h: Apply landscape orientation
- This command is a static command.

Remarks

- Invalid if n3 is a value outside of the allowable range

ESC iXL1 Retrieve default landscape orientation

ASCII:	ESC	i	X	L	1	n1	n2
Decimal:	27	105	88	76	49	n1	n2
Hexadecimal:	1B	69	58	4C	31	n1	n2

Parameters

n1: 00h (Fixed)

n2: 00h (Fixed)

Description

- The default landscape orientation setting is returned as 3-byte data.

[1]	01h (Fixed)
[2]	00h (Fixed)
[3]	Setting 00h: Cancel landscape orientation 01h: Apply landscape orientation

- The retrieved value is a value specified by a static command.

ESC iXj2 Select default international character set

ASCII:	ESC	i	X	j	2	n1	n2	n3
Decimal:	27	105	88	106	50	n1	n2	n3
Hexadecimal:	1B	69	58	6A	32	n1	n2	n3

Parameters

n1: 01h (Fixed)
n2: 00h (Fixed)
00h≤n3≤0Dh, 40h

Description

- Selects the default international character set.
 - n3=00h: U.S.A. (*Manufacturer's default)
 - n3=01h: France
 - n3=02h: Germany
 - n3=03h: U.K.
 - n3=04h: Denmark I
 - n3=05h: Sweden
 - n3=06h: Italy
 - n3=07h: Spain I
 - n3=08h: Japan
 - n3=09h: Norway
 - n3=0Ah: Denmark II
 - n3=0Bh: Spain II
 - n3=0Ch: Latin America
 - n3=0Dh: South Korea
 - n3=40h: Legal
- This command is a static command.

Remarks

- Invalid if n3 is a value outside of the allowable range

ESC iXj1 Retrieve default international character set

ASCII:	ESC	i	X	j	1	n1	n2
Decimal:	27	105	88	106	49	n1	n2
Hexadecimal:	1B	69	58	6A	31	n1	n2

Parameters

n1: 00h (Fixed)

n2: 00h (Fixed)

Description

- The default international character set setting is returned as 3-byte data.

[1]	01h (Fixed)
[2]	00h (Fixed)
[3]	Setting 00h: U.S.A. 01h: France 02h: Germany 03h: U.K. 04h: Denmark I 05h: Sweden 06h: Italy 07h: Spain I 08h: Japan 09h: Norway 0Ah: Denmark II 0Bh: Spain II 0Ch: Latin America 0Dh: South Korea 40h: Legal

- The retrieved value is a value specified by a static command.

ESC iXm2 Select default character code set

ASCII:	ESC	i	X	m	2	n1	n2	n3
Decimal:	27	105	88	109	50	n1	n2	n3
Hexadecimal:	1B	69	58	6D	32	n1	n2	n3

Parameters

n1: 01h (Fixed)

n2: 00h (Fixed)

00h≤n3≤04hDescription

- Selects the default character code set.
 - n3=00h: Standard character code set (*Manufacturer's default)
 - n3=01h: Eastern European character code set
 - n3=02h: Western European character code set
 - n3=03h: Reserved
 - n3=0Ch: Cyrill character code set
- This command is a static command.

Remarks

- Invalid if n3 is a value outside of the allowable range

ESC iXm1 Retrieve default character code set

ASCII:	ESC	i	X	m	1	n1	n2
Decimal:	27	105	88	109	49	n1	n2
Hexadecimal:	1B	69	58	6D	31	n1	n2

Parameters

n1: 00h (Fixed)

n2: 00h (Fixed)

Description

- The default character code set setting is returned as 3-byte data.

[1]	01h (Fixed)
[2]	00h (Fixed)
[3]	Setting 00h: Standard character code set 01h: Eastern European character code set 02h: Western European character code set 03h: Reserved 0Ch: Cyrill character code set

- The retrieved value is a value specified by a static command.

ESC iXE2 Specify barcode margin setting

ASCII:	ESC	i	X	E	2	n1	n2	n3
Decimal:	27	105	88	69	50	n1	n2	n3
Hexadecimal:	1B	69	58	45	32	n1	n2	n3

Parameters

n1: 01h (Fixed)

n2: 00h (Fixed)

00h≤n3≤01h

Description

- Select an existence of barcode margin.
 - n3=00h: No margin
 - n3=01h: Add margin (*Manufacturer's default)
- This command is a static command.

Remarks

- Invalid if n3 is a value outside of the allowable range

ESC iXE1 Retrieve barcode margin setting

ASCII:	ESC	i	X	E	1	n1	n2
Decimal:	27	105	88	69	49	n1	n2
Hexadecimal:	1B	69	58	45	31	n1	n2

Parameters

n1: 00h (Fixed)

n2: 00h (Fixed)

Description

- Return a barcode margin setting as 3 Bytes data.

[1]	01h (Fixed)
[2]	00h (Fixed)
[3]	Setting 00h: No margin 01h: Add margin

- The retrieved value is a value specified by a static command.

Appendix A: Character Code Tables

Character code tables

(1) Windows1252 (Western Europe)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0			SP	0	@	P		p	€			°	À	Ð	à	ð
1			!	1	A	Q	a	q	~	'	i	±	Á	Ñ	á	ñ
2			"	2	B	R	b	r	,	'	ç	²	Â	Ò	â	ò
3			#	3	C	S	c	s	f	"	£	³	Ã	Ó	ã	ó
4			\$	4	D	T	d	t	,	"	¤	'	Ä	Ô	ä	ô
5			%	5	E	U	e	u	...	•	¥	µ	Å	Õ	å	õ
6			&	6	F	V	f	v	†	-		¶	Æ	Ö	æ	ö
7			'	7	G	W	g	w	‡	—	§	·	Ç	×	ç	÷
8			(8	H	X	h	x	^	~	¨	¸	È	Ø	è	ø
9)	9	I	Y	i	y	‰	™	©	¹	É	Ù	é	ù
A			*	:	J	Z	j	z	Š	Š	ª	º	Ê	Ú	ê	ú
B			+	;	K	[k	{	<	>	«	»	Ë	Û	ë	û
C			,	<	L	\	l		Œ	Œ	¬	¼	Ì	Ü	ì	ü
D			-	=	M]	m	}			-	½	Í	Ý	í	ý
E			.	>	N	^	n	~	Ž	Ž	®	¾	Î	Þ	î	þ
F			/	?	O	_	o	DEL		ÿ	¯	¿	Ï	ß	ï	ÿ

Note

" ■ " indicates that a space is printed.

" ■ " indicates that the character will switch when the international character set is changed.

(2) Windows1250 (Eastern Europe)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0			SP	0	@	P		p	€	ť		°	Ř	Đ	ř	ď
1			!	1	A	Q	a	q	À	‘	˘	±	Á	Ň	á	ň
2			"	2	B	R	b	r	,	’	˘	˘	Â	Ň	â	ň
3			#	3	C	S	c	s	˘ L	“	Ł	ł	Ă	Ó	ă	ó
4			\$	4	D	T	d	t	„	”	¤	’	Ä	Ô	ä	ô
5			%	5	E	U	e	u	...	•	Ą	μ	Í	Õ	í	õ
6			&	6	F	V	f	v	†	–		¶	Ć	Ö	ć	ö
7			’	7	G	W	g	w	‡	—	§	·	Ç	×	ç	÷
8			(8	H	X	h	x	İ		”	˘	Č	Ř	č	ř
9)	9	I	Y	i	y	‰	™	©	ą	É	Ů	é	ů
A			*	:	J	Z	j	z	Š	Š	Ş	ş	Ę	Ú	ę	ú
B			+	;	K	[k	{	<	>	«	»	Ě	Ů	ě	ů
C			,	<	L	\	l		Ś	Ś	¬	Ł	Ě	Ü	ś	ü
D			–	=	M]	m	}	Ť	Ť	–	”	Í	Ý	í	ý
E			.	>	N	^	n	~	Ž	ž	®	İ	Î	Ț	î	ț
F			/	?	O	_	o	DEL	Ž	ž	Ž	ž	Ď	ß	ď	·

Note

" ■ " indicates that a space is printed.

" ■ " indicates that the character will switch when the international character set is changed.

(3) Brother standard

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0			SP	0	@	P	`	p	Ç	É	á	☐	L		α	
1			!	1	A	Q	a	q	ü	æ	í	☐	⊥		β	±
2			"	2	B	R	b	r	é	Æ	ó	☐	⊥			
3			#	3	C	S	c	s	â	ô	ú		⊥			¾
4			\$	4	D	T	d	t	ä	ö	ñ	⊥	—			
5			%	5	E	U	e	u	à	ò	Ñ		⊥			§
6			&	6	F	V	f	v	å	û	ª				μ	÷
7			'	7	G	W	g	w	ç	ù	º					
8			(8	H	X	h	x	ê	ÿ	¿	©	ℒ			°
9)	9	I	Y	i	y	ë	Ö	®	¶	¶	⌋		.
A			*	:	J	Z	j	z	è	Ü	€		⊥	⌈	Ω	
B			+	;	K	[k	{	ï	ø	½	¶	⊥	✓	δ	
C			,	<	L	\	l		î	£	¼	¶	⊥	☑		³
D			-	=	M]	m	}	ì	¥	¡	TEL	=		ø	²
E			.	>	N	^	n	~	Ä	Pts	«	FAX	⊥			
F			/	?	O	_	o	DEL	Å	f	»	⌈		☐		

Note

" ■ " indicates that a space is printed.

" ■ " indicates that the character will switch when the international character set is changed.

(4) Windows 1251(Cyrill character code set)

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0			SP	0	@	P	`	p	Ђ	ђ		°	А	Р	а	р
1			!	1	А	Q	а	q	Ѓ	‘	Ў	±	Б	С	б	с
2			"	2	В	Р	В	р	,	'	ѐ	І	В	Т	в	т
3			#	3	С	Ѕ	С	ѕ	ѓ	“	Ј	і	Г	У	г	у
4			\$	4	Д	Т	Д	т	„	”	ѡ	ѓ	Д	Ф	д	ф
5			%	5	Е	U	е	u	...	•	Ѓ	μ	Е	Х	е	х
6			&	6	Ф	В	ф	в	†	—	і	¶	Ж	Ц	ж	ц
7			'	7	Г	W	г	w	‡	—	§	·	З	Ч	з	ч
8			(8	Н	Х	н	х	€		Ё	ё	И	Ш	и	ш
9)	9	І	У	і	у	‰	™	©	№	Й	Щ	й	щ
A			*	:	Ј	Ѕ	ј	ѕ	Љ	љ	Є	є	К	Ъ	к	ъ
B			+	;	К	[к	{	‹	›	«	»	Л	Ы	л	ы
C			,	<	Л	\	І	ı	Њ	њ	¬	ј	М	Ь	м	ь
D			-	=	М]	м	}	Ќ	ќ		Ѕ	Н	Э	н	э
E			.	>	Н	^	н	~	Ћ	ћ	®	ѕ	О	Ю	о	ю
F			/	?	О	_	о		Џ	џ	Ї	ї	П	Я	п	я

Note

" ■ " indicates that a space is printed.

" ■ " indicates that the character will switch when the international character set is changed.

International character set table

Corresponding characters that switch in each language when the international character set is changed

n		23	24	40	5B	5C	5D	5E	60	7B	7C	7D	7E
0	United States (U.S.A)	#	\$	@	[\]	^	`	{		}	~
1	France	#	\$	à	°	ç	§	^	`	é	ù	è	¨
2	Germany	#	\$	§	Ä	Ö	Ü	^	`	ä	ö	ü	ß
3	Britain (U.K.)	£	\$	@	[\]	^	`	{		}	~
4	Denmark I	#	\$	@	Æ	Ø	Å	^	`	æ	ø	å	~
5	Sweden	#	¤	É	Ä	Ö	Å	Ü	é	ä	ö	å	ü
6	Italy	#	\$	@	°	\	é	^	ù	à	ò	è	ì
7	Spain I	Pt	\$	@	ı	Ñ	ı	^	`	¨	ñ	}	~
8	Japan	#	\$	@	[¥]	^	`	{		}	~
9	Norway	#	¤	É	Æ	Ø	Å	Ü	é	æ	ø	å	ü
10	Denmark II	#	\$	É	Æ	Ø	Å	Ü	é	æ	ø	å	ü
11	Spain II	#	\$	á	ı	Ñ	ı	é	`	í	ñ	ó	ú
12	Latin America	#	\$	á	ı	Ñ	ı	é	ü	í	ñ	ó	ú
13	South Korea	#	\$	@	[₩]	^	`	{		}	~
64	Legal	#	\$	§	°	'	"	¶	`	©	®	†	™

Appendix B: Introducing the Brother Developer Center

Useful information for developers, such as applications, tools, SDKs as well as FAQs, are provided in the Brother Developer Center.

<http://www.brother.com/product/dev/index.htm>

brother®