



RJ-2030/2050/2140/2150

Quick Setup Guide

English

Thank you for purchasing the Brother RJ-2030/2050/2140/2150 mobile printer. Read the product's *Quick Setup Guide* and *Product Safety Guide*, before using your printer. For detailed operation instructions, see the *User's Guide* (Brother support website at support.brother.com). We suggest that you keep these documents in a handy place for future reference.

You can download the latest drivers and applications for your printer, read FAQs and troubleshooting tips, and learn about special printing solutions from the Brother support website.

RD Rolls  are genuine Brother roll media that have been tested and certified for use with this product.

To download and install printer drivers and software, visit our website.

install.brother

For more information, see *Driver and Software Installation*.

Available Manuals

You can download the latest manuals from the Brother support website at support.brother.com


Product Safety Guide *1, *2	This guide provides safety information; read it thoroughly before using your printer.
Quick Setup Guide *1, *2	This guide provides basic information about using your printer along with detailed troubleshooting tips.
User's Guide *2	This guide includes the contents of the <i>Quick Setup Guide</i> , and additional information about your printer settings, operations, safety precautions, network connection settings, troubleshooting tips, and maintenance instructions.
AirPrint Guide *2	This guide provides information for using AirPrint to print from an iPad/iPhone/iPod device.
P-touch Template Manual *2	This manual provides information on P-touch Template.
Raster Command Reference *2	This manual provides information about printer control commands for controlling your printer directly.

¹ Printed manual in the box


² PDF manual on the Brother support website

Unpacking Your Printer

Check that the package contains the following before using your printer:




Printer



Rechargeable
Li-ion Battery



Belt Clip



Quick Setup
Guide




Product Safety
Guide



Phillips Screws
(2 ea)

General Description




- | | |
|--------------------------------|--|
| 1 LCD | 11  (Feed) button/OK button
(To feed the paper or print your printer settings) |
| 2 Paper exit slot | 12  Menu button/▼ button |
| 3 Media roll compartment cover | 13  (Power) button/Back button
(To turn your printer on/off) |
| 4 Media roll cover open lever | 14 LED indicator |
| 5 Interface cover | |
| 6 Battery cover | |
| 7 Battery latch | |
| 8 DC connector | |
| 9 Mini-USB port | |
| 10 Battery compartment | |


Battery Installation/Removal

Installing the Battery (PA-BT-003)

1. Move the battery cover lock to the unlock position, and then open the battery cover.

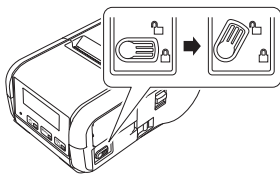


2. Insert the battery into the battery compartment until the battery latch locks into place. Make sure that the terminal end of the battery is facing inwards and oriented correctly as shown. Do NOT use excessive force to install the battery.




1 Battery latch

3. Close the battery cover, and then move the battery cover lock to the lock position.

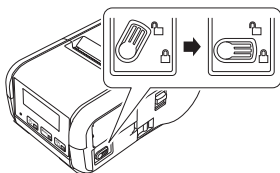


Removing the Battery


1. Move the battery cover lock to the unlock position, and then open the battery cover.

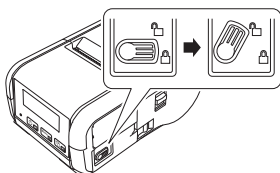

2. While pushing the battery latch, remove the battery.



3. Close the battery cover, and then move the battery cover lock to the lock position.

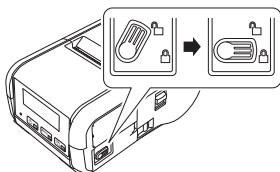


Recharging the Battery

1. Make sure that the rechargeable Li-ion battery is installed in your printer.
2. Use the compatible Brother AC adapter and AC power cord to connect your printer to an AC power socket (see *Recharging the Battery using the AC Adapter (PA-AD-600A) (Optional)*), or use the Brother compatible car adapter to connect your printer to a DC power socket (see *Recharging the Battery using the Car Adapter (Optional)*).
3. The LED indicator light is orange when the battery is charging. When the rechargeable Li-ion battery is fully charged, the LED indicator turns off (when power is turned off) or lights in green (when power is turned on). Disconnect the AC adapter or car adapter from the battery's DC connector.

For more information, see the *User's Guide*.

■ Recharging the Battery using the AC Adapter (PA-AD-600A) (Optional)

1. Make sure that the rechargeable Li-ion battery is installed in your printer.
2. Open the interface cover and connect the AC adapter to your printer.
3. Connect the AC power cord to the AC adapter.
4. Connect the AC power cord to a nearby AC power socket (100 - 240 VAC, 50 - 60 Hz).




1 AC adapter
2 AC power cord

■ Recharging the Battery using the Car Adapter (Optional)

Connect your printer to your vehicle's 12 V DC power socket (cigarette lighter or similar) to charge the rechargeable battery.


1. Make sure that the rechargeable Li-ion battery is installed in your printer.
2. Connect the car adapter to the vehicle's 12 V DC power socket.
3. Open the interface cover and connect the car adapter to your printer.



1 Car adapter

■ Recharging the Battery using the Battery Charger (Optional)

The optional battery charger can also be used for charging the battery outside of the printer. For more information, see the operation manual that is included with the battery charger.



Stopping Rechargeable Li-ion Battery Charging

To stop the battery charging, disconnect the AC adapter or car adapter from the DC connector.

Notes on Using the Rechargeable Li-ion Battery

- High density (dark) printing discharges the battery faster than low density printing. You can adjust the print density setting in the Printer Setting Tool (see the *User's Guide*).
- The battery charging must take place between 5 and 35°C environments, otherwise the battery will not be charged. If the charging stops because the environment temperature is too low or too high, place your printer in an environment with a temperature between 5 and 35°C and try charging again.
- If you use your printer when both the battery is installed and the AC adapter or car adapter is connected, charging may stop even if the battery is not fully charged.

Rechargeable Li-ion Battery Characteristics


To ensure the highest performance and longest life from the battery:

- Do not use or store the battery in a location exposed to extreme high or low temperatures as it may deteriorate more quickly.
- Remove the battery when storing your printer for long periods of time.
- Store batteries with less than a 50% charge in a cool dry place out of direct sunlight.
- Recharge the battery every six months if it is stored for long periods of time.
- It is normal and safe for the printer to become warm while charging. Disconnect the charger and stop using the printer if it becomes hot to the touch.

Setting the Paper or Label Roll


For RJ-2030/2050

1. Pull the cover open lever in the direction shown to open the media roll compartment cover.



1 Cover open lever

2. Insert the media roll into the media roll compartment with the roll feeding from the bottom as shown.




1 Print surface (faces outwards on the roll)

3. Close the media roll compartment by pressing down on the centre of the cover until it locks into place.


For RJ-2140/2150

1. Pull the cover open lever in the direction shown to open the media roll compartment cover.




1 Cover open lever

2. Open the roll guides by lifting up the roll guide adjustment lever and pulling the roll guide outwards. Insert the media roll into the media roll compartment with the roll feeding from the bottom as shown.

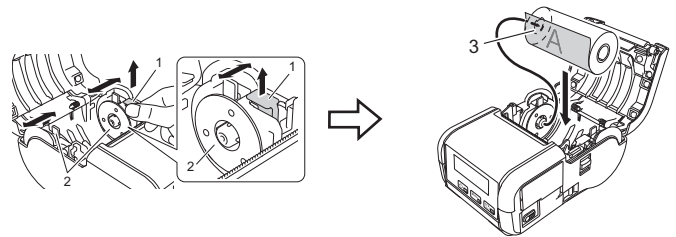

1 Roll guide adjustment lever
2 Roll guide
3 Print surface (faces outwards on the roll)

3. While lifting up the roll guide adjustment lever, push in both roll guides to the roll width. Insert the media roll so that it is positioned straight in the media roll compartment.

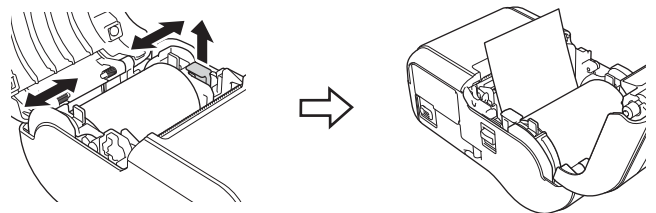

4. Close the media roll compartment by pressing down on the centre of the cover until it locks into place.

Turning Your Printer On or Off

On: Press and hold the  (Power) button until the LCD turns on.

Off: Press and hold the  (Power) button until the message [System Off] appears on the LCD.

IMPORTANT

Do NOT remove the battery until the LCD turns off.

Setting the Language of the LCD

1. Press the [Menu], [▼] button to select the [Settings] menu, and then press the [OK] button.
2. Select [🔊 Language], and then press the [OK] button.
3. Select a language, and then press the [OK] button.

LED Indicators

The indicator lights and flashes to indicate your printer's status. The symbols used in this section explain the meaning of the different indicator colours and patterns:

	= Indicator is lit		G = Green
	= Indicator is flashing		O = Orange
(Off)	= Indicator is off		R = Red

Example: **G**  = Indicator is flashing green

Indicator status	Condition
(Off)	Power off Charging complete (when power is turned off)
G 	Battery level: one-third or more Charging complete (when power is turned on)
O 	Charging
O 	Battery level: low
R 	Rechargeable battery error Battery level: empty Wrong media error Cover open error System error Mass storage error Communication error WPS connection error Memory full error Database search error No template error

Driver and Software Installation

To print from your Windows computer, install the printer driver, P-touch Editor and other applications on your computer:

1. Visit [install.brother](https://install.brother.com) and download the installer for the latest software and manuals.
2. Double-click the downloaded .exe file and follow the on-screen instructions to proceed with the installation.

NOTE

To connect your printer to a computer using a wireless connection, we recommend the following:

- Configure the wireless network settings while installing the software. You can change the settings later using the Printer Setting Tool. For more information, see the *User's Guide*.
- Install the software on a computer wirelessly connected to your network and configure your printer using a USB cable.
- Get the SSID (network name) and password (network key) of the wireless network in advance.
- If your wireless access point/router supports WPS, you can use WPS (Wi-Fi Protected Setup) to quickly configure the wireless network settings.

3. Close the dialog box when the installation is complete.

Connecting to a Host Device

Your printer can be connected to your computer or mobile device using a USB cable or via a Bluetooth connection (RJ-2030/2050/2150 only) or Wi-Fi connection (RJ-2050/2140/2150 only). For more information, see the *User's Guide*.

Connecting Using USB

1. Make sure your printer is turned off before connecting the USB cable.
2. Connect the printer end of the USB cable to the mini-USB port on the side of your printer.
3. Connect the other end of the USB cable to the USB port on the computer.

Connecting Using Bluetooth (RJ-2030/2050/2150 only)

Use this procedure to pair your printer with the computer or mobile device using the Bluetooth management software:

1. Press the [Menu] button to select the [Bluetooth] menu, and then press the [OK] button.
Select [On].
2. Use your Bluetooth device management software to discover your printer.

NOTE

Follow the recommendations of the manufacturer of your Bluetooth-equipped devices (computers and mobile devices) or Bluetooth adapter and install any necessary hardware and software.

- The Bluetooth connection settings are saved even after your printer is turned off.
- If your device cannot discover your printer using Bluetooth, your printer may be connected to another device. Use the connected device to end the Bluetooth connection with your printer, or turn your printer off and on again.
- If you close the cover of the device while transmitting data, the communication may be interrupted.
- If your printer becomes disconnected because the mobile device is moved away from your printer, select "Bluetooth" in the device settings, and then tap the device you want to connect to from the list of Bluetooth devices.

Connecting Using Wi-Fi® (RJ-2050/2140/2150 only)

1. Press the [Menu], [▼] button to select the [WLAN] menu, and then press the [OK] button.
Set [On/Off] to [On].
2. Use your computer or mobile device to select the SSID of your printer ("DIRECT-***** RJ-XXXX"). If required, enter the password ("205*****" for RJ-2050, "214*****" for RJ-2140, or "215*****" for RJ-2150). ***** is the last five digits of the serial number.

NOTE

For more information about connecting using Wi-Fi, see the *User's Guide*.

Printing Receipts or Labels


1. Install the printer driver and software downloaded from the Brother website. (See *Driver and Software Installation*.)
2. Make sure that your printer is powered with a charged battery.
3. Turn your printer on.
4. Connect your printer to a computer or mobile device using either a USB cable, Bluetooth, or Wi-Fi.
5. Insert the media roll.
6. Print receipts or labels.

For more information, see the *User's Guide*.


Removing the Receipt/Label Roll

For RJ-2030/2050

1. Pull the cover open lever in the direction shown to open the media roll compartment cover.



2. Remove the roll.




NOTE

It is not necessary to adjust the roll holder once it is correctly adjusted to the media roll width.


For RJ-2140/2150

1. Pull the cover open lever in the direction shown to open the media roll compartment cover.



2. While pushing the roll release lever, tilt the roll guide slightly, and then remove the roll. The roll can be removed without changing the position of the roll guide. Do not forcefully tilt the roll guide too far. Otherwise, the roll guide could break.


- 1 Roll release lever

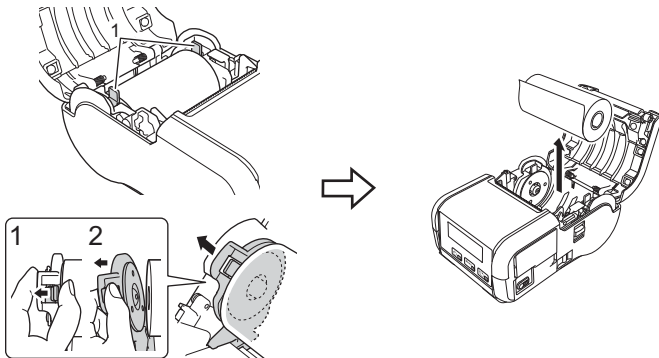

Attaching the Belt Clip



The printer can be carried on your belt by attaching the included belt clip. Follow the instructions below to attach the clip to the printer and your belt. You can attach the included clip to your printer and secure it to your belt.

1. Secure the belt clip to the rear of your printer using the Phillips-head screws as shown:




- 1 Belt clip
- 2 Phillips screw

2. Attach the clip to your belt.



Turn the clip as shown to lock the belt clip.




Turn the clip to the left or right to unlock the belt clip.

IMPORTANT

Make sure you attach the belt clip securely to your printer and to your belt. There is a risk of injury or damage if the belt clip is not attached securely and your printer falls.

Troubleshooting

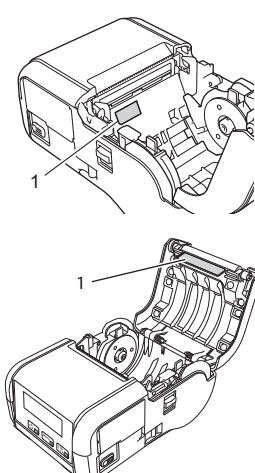Problem	Possible Solutions
Your printer cannot connect to the host device using Wi-Fi or Bluetooth.	■ Move your printer within about one metre of the mobile device when you configure the Wi-Fi network settings. ■ Move your printer to an obstruction-free area. ■ If a wireless computer, Bluetooth-equipped device, microwave oven, digital cordless phone, or other device is near your printer or the wireless access point/router, move the device away from your printer or wireless access point/router.
Your printer cannot print using Wi-Fi or Bluetooth.	
Your printer does not feed paper.	■ Is there dirt or lint on the roller preventing it from rolling freely? Clean the roller. (See <i>Maintenance</i>.) ■ Check that the ejection path of the paper is not blocked. ■ Check that the media roll is set correctly by removing the media roll and reinstalling. (See <i>Removing the Receipt/Label Roll</i> and <i>Setting the Paper or Label Roll</i>.) ■ Ensure that the media roll compartment cover is closed correctly.
Your printer feeds paper continuously.	■ Open the media roll compartment cover. ■ Press the  (Power) button to cancel the print job. ■ Turn your printer off.
Does not stop in between labels.	■ Check that you entered the media information correctly. You can set the media information using Paper Size Setup in the Printer Setting Tool. ■ Check that the sensor is not dirty. If the sensor is dirty, wipe it with a dry cotton swab.  1 Media sensor ■ Check that there are no items blocking the sensor.
Your printer is not connected correctly to the network.	Check the WLAN icon on the LCD.  : The network is connected correctly.  : Your printer is searching for the network. No icon : The wireless network settings are disabled.


Problem	Possible Solutions
Print head, motor, or battery is too hot.	The thermal head, motor, or battery is too hot. ■ Head: If the thermal head becomes too hot, the thermal head may produce imaging on the paper in areas not intended to be printed. This condition is normal when printing documents with a great deal of "black" content. Your printer will stop and resume printing after the print head has cooled down. To avoid or delay the onset of this condition, print using a lighter density setting, reduce the amount of black space being printed (for example, remove background shading and colours in graphs and presentation documents), and make sure that your printer has adequate ventilation and is not located in an enclosed space. ■ Motor or battery: Do not use your printer continuously. If your printer is used continuously, the motor or battery will become too hot. In this case, your printer will stop and resume printing after the motor or battery has cooled down. NOTE This condition may occur more often when your printer is used at high altitude (more than about 3,000 m) due to a lower air density available to cool your printer.
Printer is in boot mode.	If you remove the Li-ion battery from your printer while the firmware is being updated, your printer will restart in boot mode.

Maintenance

Maintenance of your printer may be carried out as required. However, some environments may require carrying maintenance out more frequently (for example, dusty environments).

■ Print Head Maintenance


Wipe the print head with a dry, lint-free cloth moistened with isopropyl alcohol or ethanol. Carry out the maintenance frequently.



1 Print head

■ Roller Maintenance


Wipe the roller with a dry, lint-free cloth moistened with isopropyl alcohol or ethanol. After cleaning the roller, make sure that no lint or other material remains on the roller.



2 Roller

■ Paper Exit Slot Maintenance

If adhesive accumulates at the paper exit slot and media becomes jammed, clean the paper exit slot with a cloth slightly moistened with isopropyl alcohol.



3 Paper exit slot

Product Specifications

Model Name	RJ-2030/2050/2140/2150
Dimensions	RJ-2030/2050 Approximately 100 (D) x 122 (W) x 57 (H) mm RJ-2140/2150 Approximately 100 (D) x 151 (W) x 73 (H) mm
Weight	RJ-2030/2050 Approximately 465 g (including battery) RJ-2140/2150 Approximately 545 g (including battery)
Printing	
Media size	RJ-2030/2050 58 mm RJ-2140/2150 25.4 – 58 mm
Method	Direct thermal printing
Interface	
USB	USB Ver. 2.0 (Full Speed) (mini-B)
Bluetooth (RJ-2030/2050/2150 only)	RJ-2030 Supported profiles: SPP, OPP, BIP, HCRP RJ-2050/2150 Supported profiles: SPP, OPP, BIP, HCRP Supported protocol: iAP
Wi-Fi (RJ-2050/2140/2150 only)	- Wireless Direct: IEEE 802.11g/n - Ad-hoc Mode: IEEE 802.11b/g/n - Infrastructure Mode: IEEE 802.11b/g/n
Environment	
Operating temperature	Printing: -10 – 50°C Charge: 5 – 35°C
Operating humidity	10 – 90% (No condensation, Maximum wet bulb temperature: 27 °C)
Storage temperature	-20 – 60°C
Storage humidity	10 – 90% (No condensation, Maximum wet bulb temperature: 45 °C)

Printing the Printer Information

You can use the  (Feed) button to print a report that lists the following printer information:

- Program version
- Printer usage history
- Missing dot test pattern
- Printer setting information
- List of transferred data
- Network setting information

NOTE

- You can use the Printer Setting Tool to set in advance which items will be printed.
- The node name appears in the Printer Settings. The default node name is "BRWxxxxxxxxxx". ("xxxxxxxxxx" is based on your printer's MAC Address / Ethernet Address.)
- This operation can also be performed using the Printer Setting Tool.

- 1.** Make sure that a roll of receipt paper has been loaded and the media roll compartment cover is closed.
- 2.** Turn on your printer.
- 3.** Press and hold the  (Feed) button until "Printing" appears on the LCD. The printer information will print.

For more information, see the *User's Guide*.

Useful Websites

Brother Global Web Site: www.brother.com

Brother Developer Center: www.brother.com/product/dev

For Frequently Asked Questions (FAQs), Product Support and Technical Questions, and Driver Updates and Utilities: support.brother.com