

USER'S GUIDE

FAX-1820C MFC-3220C







THIS EQUIPMENT IS DESIGNED TO WORK WITH A TWO WIRE ANALOGUE PSTN LINE FITTED WITH THE APPROPRIATE CONNECTOR.

APPROVAL INFORMATION

Brother advises that this product may not function correctly in a country other than where it was originally purchased, and does not offer any warranty in the event that this product is used on public telecommunication lines in another country.

Compilation and Publication Notice

Under the supervision of Brother Industries Ltd., this manual has been compiled and published, covering the latest product descriptions and specifications.

The contents of this manual and the specifications of this product are subject to change without notice.

Brother reserves the right to make changes without notice in the specifications and materials contained herein and shall not be responsible for any damages (including consequential) caused by reliance on the materials presented, including but not limited to typographical and other errors relating to the publication.

Use only GENUINE brother supplies


DO NOT refill the ink cartridges. Attempting to use refilled cartridges or the use of incompatible inks, may cause damage to the print heads in your product. Any such damages will not be covered by warranty. Warranty coverage does not apply to problems caused by the use of 3rd party ink or 3rd party ink cartridges. We can only recommend the use of genuine Brother consumables.

Safety precautions

To use the machine safely

Please refer to these instructions for later reference and before attempting any maintenance.



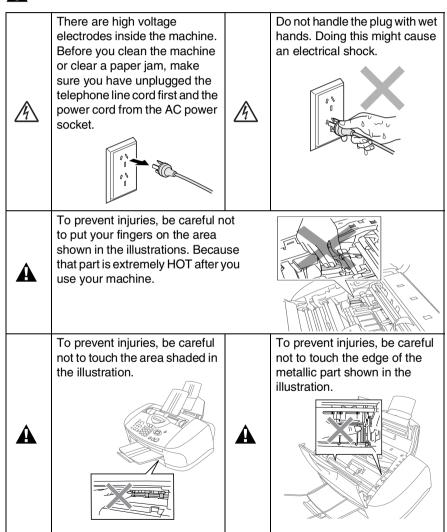

- Use caution when installing or modifying telephone lines. Never touch telephone wires or terminals that are not insulated unless the telephone line has been disconnected at the wall socket. Never install telephone wiring during a lightning storm. Never install a telephone wall socket in a wet location.
- This product must be installed near a socket that is easily accessible. In case of emergencies, you must disconnect the power cord from the socket in order to shut off power completely.

IMPORTANT SAFETY INSTRUCTIONS

When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury to persons, including the following:



- 1. Do not use this product near water, for example, near a bath tub, wash bowl, kitchen sink or laundry tub, in a wet basement or near a swimming pool.
- 2. Avoid using a telephone (other than a cordless type) during an electrical storm. There may be a remote risk of electric shock from lightning.
- 3. Do not use the telephone to report a gas leak in the vicinity of the leak.

SAVE THESE INSTRUCTIONS

Choosing a location

Place your machine on a flat, stable surface that is free of vibration and shocks, such as a desk. Put the machine near a socket and a standard, grounded AC power outlet. Choose a location where the temperature remains between 10° and 35°C.

Caution

- Avoid placing your machine in a high-traffic area.
- Avoid placing your machine on the carpet.
- Do not place near heaters, air conditioners, water, chemicals, or refrigerators.
- Do not expose the machine to direct sunlight, excessive heat, moisture, or dust.
- Do not connect your machine to electrical sockets controlled by wall switches or automatic timers.
- Disruption of power can wipe out information in the machine's memory.
- Do not connect your machine to electrical sockets on the same circuit as large appliances or other equipment that might disrupt the power supply.
- Avoid interference sources, such as speakers or the base units of cordless phones.



Quick Reference Guide

Sending faxes

Automatic Transmission

- 1 If it is not illuminated in green, press (Fax).
- 2 Load your document. (See Load documents on page 2-1.)
- 3 Enter the fax number using One-Touch, Speed-Dial, Search or the dial pad.
- 4 Press Mono Start or Colour Start.

Receiving faxes Select Receive Mode

- 1 Press Menu/Set, 0,1.
- Press or to select Fax Only, Manual, Fax/Tel or External TAD, and then press Menu/Set.

Storing numbers

Storing One-Touch Dial numbers

- 1 Press Menu/Set, 2, 3, 1.
- Press the One-Touch key where you want to store the number.
- 3 Enter a number (up to 20 digits), and then press Menu/Set.
- 4 Enter a name up to 15 characters (or leave it blank), and then press Menu/Set.
- 5 Press Stop/Exit.

Storing Speed-Dial numbers

- 1 Press Menu/Set, 2, 3, 2.
- 2 Using the dial pad, enter a two-digit Speed-Dial location number, and then press Menu/Set.
- 3 Enter a number (up to 20 digits), and then press Menu/Set.
- 4 Enter a name up to 15 characters (or leave it blank), and then press Menu/Set
- 5 Press Stop/Exit.

Dialling operations One-Touch Dialling/ Speed-Dialling

- 1 If it is not illuminated in green, press (Fax).
- 2 Load your document. (See Load documents on page 2-1.)
- 3 Press the One-Touch key of the number you want to call.

-OR-

Press **Search/Speed Dial**, press **#**, and then press the two-digit Speed-Dial number.

4 Press Mono Start or Colour Start.

Using Search

- 1 If it is not illuminated in green, press (Fax).
- Press Search/Speed Dial, and then enter the first letter of the name you're looking for.
- **3** Press or search the memory.
- 4 Press Mono Start or Colour Start.

Making copies Single copy

- 1 Press (Copy) to illuminate it in green.
- 2 Load your document. (See Load documents on page 2-1.)
- 3 Press Mono Start or Colour Start.

Sorting multiple copies (Using the ADF)

- 1 Press (Copy) to illuminate it in green.
- 2 Load your document in the ADF.
- **3** Use the dial pad to enter the number of copies you want (up to 99).
- 4 Press Options.
- Fress or select Stack/Sort, and then press Menu/Set.
- 6 Press or select sort, and then press Menu/Set.
- 7 Press Mono Start or Colour Start.

Table of Contents

Introduction	1-1
Using this Guide	1-1
Finding information	1-1
Symbols used in this Guide	1-1
Control panel overview	1-2
Turning the machine to Power Save condition	1-5
About fax machines	1-7
Fax tones and handshake	1-7
ECM (Error Correction Mode)	1-8
Connecting the machine	1-9
Connecting an external telephone	1-9
Connecting an external telephone answering	
Sequence	1-10
	1-11
, ,	1-13
Custom features on your phone line	1-13
Loading documents and paper	2-1
• , ,	
About paper	2-3
Handling and using special paper	2-3
To load envelopes	
	device (TAD) Sequence Connections Recording outgoing message (OGM) on an external TAD Multi-line connections (PBX) If you are installing the machine to work with a PBX Custom features on your phone line Load documents and paper Load documents Using the automatic document feeder (ADF) Recommended environment About paper Handling and using special paper Paper capacity of the paper tray Paper specifications for the paper tray Paper capacity of the output paper support Printable area How to load paper and envelopes To load glossy paper

On-screen programming3-1 User-friendly programming3-1 Menu table3-1 Memory storage......3-1 Navigation keys3-2 Getting started4-1 Initial Setup......4-1 Setting the Date and Time4-1 Setting the Station ID......4-2 Inserting spaces4-3 Making corrections4-3 Repeating letters4-3 Special characters and symbols4-4 Setting Tone or Pulse dialing mode (Not available in New Zealand)4-4 PABX and TRANSFER......4-4 General Setup.......4-5 Setting the Mode Timer (MFC-3220C only)......4-5 Setting the Mode Timer (FAX-1820C only)......4-5 Setting the Paper Type4-6 Setting the Ring Volume......4-7 Setting the Beeper Volume......4-7 Setting the Speaker Volume4-8 Power Save Setting4-8 Setup Receive5-1 Basic receiving operations......5-1 Choosing the Receive Mode......5-1 To select or change your Receive Mode5-2 Setting the Ring Delay5-3 Setting the F/T Ring Time (Fax/Tel mode only)......5-4 Fax Detect (MFC-3220C only)......5-5 Fax Detect (FAX-1820C only)......5-6 Printing a reduced incoming fax (Auto Reduction)......5-7 Receiving a fax at the end of a conversation (FAX-1820C only)......5-7 Printing a fax from the memory......5-8 Advanced receiving operations......5-9

Changing the remote codes	
Reception into memory (Not available for colour	fax
reception)	5-11
If the Memory Receive is On at this time	5-11
If the Memory Receive is Off at this time	5-11
Polling	5-12
Secure Polling	5-12
Setup for Polling Receive (Standard)	5-12
Setup for Polling Receive with Secure Code	
Setup Delayed Polling Receive	
Sequential Polling	
Setup Send	6-1
How to fax	6-1
Enter Fax mode	6-1
How to dial	6-1
Manual dialling	6-1
One-Touch dialling	6-2
Speed-Dialling	6-2
Search	
Out of Memory message	
Automatic transmission	
Manual transmission	6-4
Sending a fax at the end of a conversation	
(FAX-1820C only)	
Basic sending operations	
Sending faxes using multiple settings	
Contrast	
Fax Resolution	
Manual and automatic fax Redial	
Colour fax transmission	
Dual Access (Not available for colour faxes)	
Real Time Transmission	
Checking job status	6-10
Cancelling a job while scanning, dialling and	
sending the document	
Cancelling a scheduled job	
Advanced sending operations	
Broadcasting (Not available for Colour faxes)	
Overseas Mode	
Delayed Fax (Not available for colour faxes) Delayed Batch Transmission	6-14
(Not available for colour faxes)	C 1E
(INOL AVAIIADIE FOI COIOUI TAXES)	0-15

Setup for Polled Transmit (Standard)	
(Not available for colour faxes)	6-16
Setup for Polled Transmit with Secure Code	
(Not available for colour faxes)	6-17
TX Lock (KEY Lock for some countries)	
Using TX Lock (KEY Lock for some countries)	
Setting Up the TX Lock for the First Time	
Changing the TX Lock Password	
Switching TX Lock ON	6-20
Switching OFF TX Lock	6-21
Telephone Service for Australia	6-22
Distinctive Ringing (Telstra® FaxStream® Duet®)	6-22
Set the Distinctive Ringing to ON	6-23
Caller ID (Caller IDentification)	
Advantages of Caller ID	
How Does the Caller ID Work?	6-24
The Caller ID Appears on the Display	
When Your Telephone Rings	6-24
The Caller ID is Stored in Your Machine Memory .	
Viewing Caller ID List	6-25
Printing Caller ID List	6-25
Telephone Service for New Zealand	6-26
FaxAbility	6-26
How Will the Fax Machine Treat All Other	
Numbers?	6-26
What is the Advantage of Using the FaxAbility	
Function?	
How Does FaxAbility Work?	
How to Turn FaxAbility OFF or ON	
Caller ID (Caller IDentification)	
Advantages of Caller ID	
How Does the Caller ID Work?	6-29
The Caller ID Appears on the Display	
When Your Telephone Rings	
Viewing Caller ID List	
Printing Caller ID List	
Telephone Service for Some Countries	6-31
Distinctive Ringing (For Singapore and	
Hong Kong)	
Setting the Distinctive Ringing	
Caller ID (For Singapore and Hong Kong)	
Viewing Caller ID List	
Printing Caller ID List	6-33

7		
	Quick-Dial numbers and dialling options	
	Storing numbers for easy dialling	
	Storing One-Touch Dial numbers	
	Storing Speed-Dial numbers	7-2
	Changing One-Touch and Speed-Dial numbers	7-3
	Setting up Groups for Broadcasting	7-4
	Dialling options	7-6
	Access codes and credit card numbers	7-6
	Pause	7-7
	Fax Redial	7-7
	Tone or Pulse (Not available in New Zealand)	7-7
	Telephone (voice) operation (FAX-1820C only)	7-8
	How to dial	7-8
	Making a telephone call	7-8
	Hold (FAX-1820C only)	
0		
8	Remote Fax Options	8-1
	Fax Forwarding	
	Programming a Fax Forwarding number	
	Setting Fax Storage	
	Backup Print	
	Setting your Remote Access Code	
	Remote Retrieval	
	Using your Remote Access Code	
	Remote commands	
	Retrieving fax messages	
	Changing your Fax Forwarding number	8-6
Q	Drinting reports	0.1
	Printing reports Machine settings and activity	
	Customizing the Transmission Verification Report.	
	Setting the Journal Period	
	Printing reports	
	To print a report	
_	το ριπιτά τ ο ροιτ	9-0
10	Making copies	10-1
	Using the machine as a copier	
	Enter Copy mode	
	Making a single copy	
	Making multiple copies	
	Out of Memory message	
	Using the Copy keys (Temporary settings)	
	Quality	
	Options	

	Enlarge/Reduce	10-7
	Paper Type	10-9
	Paper Size	
	Brightness	10-11
	Contrast	
	Sorting copies	
	N in 1 copy (Page Layout)	10-14
	Changing the default copy settings	10-16
	Copy Quality	
	Brightness	10-16
	Contrast	10-16
	Colour Adjustment	
	Legal limitations	
11	Important information	11-1
	Important Information for Australia	
	IMPORTANT-For Your Safety	
	Disconnect device	
	International ENERGY STAR® Compliance	
	Statement	11-1
	Important safety instructions	
	Important Information for New Zealand	
	Important Safety Instructions	
	IMPORTANT-For Your Safety	
	Disconnect device	
	IMPORTANT NOTICE	
	Important Information for Some Countries	
	Important Safety Instructions	
	Trademarks	
12	Troubleshooting and routine maintenance	12-1
	Troubleshooting	
	Error messages	
	Document jam	
	Document is jammed inside the front of	
	the control panel	12-4
	Document is jammed inside the back of	
	the control panel	12-4
	Printer jam or paper jam	
	Paper is jammed inside the front of	12-5
	the machine	19-5
	Paper is jammed in the paper tray	
	Paper is jammed inside the paper tray	
	Paner is jammed incide the machine	

	If you are having difficulty with your machine	12-8
	How to improve print quality	12-11
	Cleaning the print head	
	Print Quality Check	12-11
	Checking the ink volume	
	Packing and shipping the machine	
	Routine maintenance	
	Cleaning the scanner	
	Cleaning the machine printer platen	
	Replacing the ink cartridges	
~	1	
G	Glossary	G-1
~	•	
S	Specifications	S-1
	Product description	
	General	
	Print media	
	Copy	
	Fax	
	Scanner (MFC-3220C only)	
	Printer	
	Interfaces	
	Computer requirements	
	Consumable items	
	Index	I-1

Introduction

Using this Guide

Thank you for buying a Brother Multi-Function Center (MFC). Your machine is simple to use, with LCD screen instructions to guide you through programming it. You can make the most of your machine by viewing through this Guide.

Finding information

All the chapter headings and subheadings are listed in the Table of Contents. You will be able to find information about a specific feature or operation by checking the Index at the back of this Guide.

Symbols used in this Guide

Throughout this Guide you'll see special symbols alerting you to important warnings, notes and actions. To make things clearer and to help you press the correct keys, we used special fonts and added some of the messages that will appear in the LCD.

Bold Bold typeface identifies specific keys on the

machine control panel.

Italics Italicised typeface emphasizes an important point

or refers you to a related topic.

Courier New Courier New type face identifies the messages on

the LCD of the machine.




Warnings inform you what to do to avoid possible personal injury.


Cautions specify procedures you must follow or avoid to prevent possible damage to the machine.

Notes tell you how you should respond to a situation that may arise or give tips about how the current operation works with other features.

Improper Setup alerts you to devices and operations that are not compatible with the machine.

Control panel overview

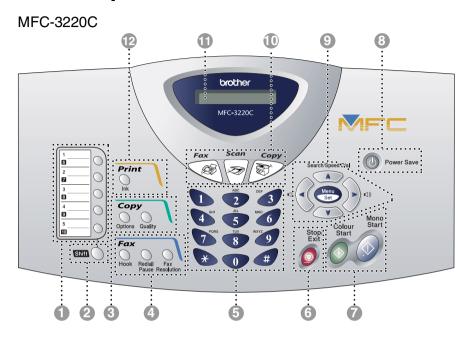

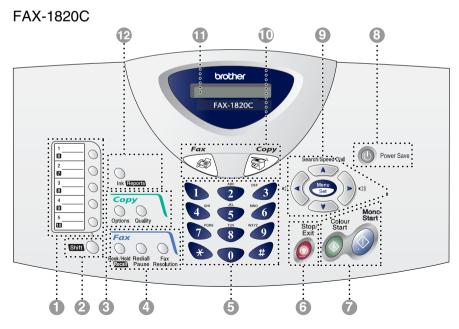

One-Touch keys

These 5 keys give you instant access to 10 previously stored dial numbers.

Shift (MFC-3220C only)

To access memory locations 6 through to 10 in the One-Touch keys hold down the Shift key.

Shift (FAX-1820C only)

To access memory locations 6 through 10 in the One-Touch keys or Report Menu in the Ink/Reports key, or lets you place telephone calls on hold, hold down the Shift key.

③ Copy keys (Temporary settings):

Options

You can quickly and easily select temporary settings for copying.

Quality

Use this key to temporarily change the quality for Copying.

Fax and telephone keys:

Redial/Pause

Redials the last number you called. It also inserts a pause in auto dial numbers.

Hook (MFC-3220C only)

Lets you dial telephone and fax numbers without lifting the handset.

Hook/Hold/Recall (FAX-1820C only)

Lets you dial telephone and fax numbers without lifting the handset.

-OR-

Lets you place telephone calls on hold. Also, This key is used to have a telephone conversation having picked up the external handset in F/T pseudo-ringing etc. Also, use this key pressing with **Shift** key to gain access to an outside line.

Fax Resolution

Sets the resolution when you send a fax.

Dial Pad

Use these keys to dial telephone and fax numbers and as a keyboard for entering information into the machine.

The # key lets you temporarily switch the dialling mode during a telephone call from Pulse to Tone.

6 Stop/Exit

Stops an operation or exits from the menu.

Mono Start Mono Start

Lets you start sending faxes or making copies in black and white. Also for MFC-3220C, lets you start a scanning operation. (Colour or mono, depending on the scanning setting on your PC)



Lets you start sending faxes or making copies in full colour.

Also for MFC-3220C, lets you start a scanning operation. (Colour or mono, depending on the scanning setting on your PC)

Power Save

You can turn the machine to power save condition.

Navigation keys:

Menu/Set

Lets you access the Menu to program and store your settings in the machine.



When using the speaker or during ringing in fax mode, you can press these keys to adjust the volume.

Search/Speed Dial

Lets you look up numbers that are stored in the dialling memory. It also lets you dial stored numbers by pressing # and a two-digit number.



Press to scroll backward to a menu selection.



Press to scroll through the menus and options.

Also, you can use these keys to do a numerical search for the names of stored numbers in fax mode.

Mode keys:



Fax

Lets you access Fax mode.



Copy

Lets you access Copy mode.



Scan (MFC-3220C only)

Lets you access Scan mode.

Liquid Crystal Display (LCD)

Displays messages on the screen to help you to set up and use your machine.

Ink/Reports (FAX-1820C only)

Lets you clean the print heads, replace an ink cartridge and check the available ink volume.

-OR-

Lets you access the Reports menu by pressing it with the Shift key.

Ink (MFC-3220C only)

Lets you clean the print heads, replace an ink cartridge and check the available ink volume.

Turning the machine to Power Save condition

When the machine is idle, you can turn it to Power Save condition by pressing the Power Save key. In Power Save mode, the machine will receive telephone calls, and also receive faxes in Fax Only, Fax/Tel or External TAD mode. The delayed faxes that have been set up will be sent. You can even retrieve faxes using Remote Retrieval if you are away from your machine. If you want to do other operations, you must turn the machine back on.

Turning the machine to Power Save condition

Press and hold down the **Power Save** key until the LCD shows:

Shutting Down

The LCD will turn off.

Turning the machine to Power Save condition off

Press and hold down the **Power Save** key until the LCD shows:

Please Wait

The LCD will show the date and time (Fax mode).



Even if you turned the machine off, it will periodically clean the print head to preserve print quality.

If you unplug the AC power cord, no machine operations will be available.



You can turn the machine Off by customizing the **Power Save** key as shown next page. In this Off mode, no machine operation will be available. (See *Power Save Setting* on page 4-8.)



The external telephone is always available.

P. Save Setting	Receive Mode	Available Operations
Fax Receive:On (default)	Fax Only Fax/Tel (Fax-1820C only) External TAD	Telephone call Receive, Fax Receive, Fax Detect, Delayed Fax, Remote Fax Option, Remote Retrieval: You cannot receive fax with Mono Start or Colour Start. Delayed Fax and Remote Fax Option should be set before you switch off the machine.
	Manual Fax/Tel*	Telephone call Receive, Delayed Fax, Fax Detect: ■ You cannot receive fax with Mono Start or Colour Start. ■ Delayed Fax should be set before you switch off machine. ■ *You cannot receive a fax automatically even if you have set the receive mode to Fax/Tel.
Fax Receive:Off	_	No machine operations will be available.

About fax machines

Fax tones and handshake

When someone is sending a fax, the machine sends fax calling tones (CNG tones). These are quiet, intermittent beeps every 4-seconds. You'll hear them after you dial and press Mono Start or **Colour Start** and they will continue for about 60 seconds after dialling During that time, the sending machine must begin the "handshake" or connection with the receiving machine.

Each time you use automatic procedures to send a fax, you are sending CNG tones over the phone line. You'll soon learn to listen for these guiet beeps each time you answer a phone on your fax line, so you will know if you are receiving a fax message.

The receiving fax responds with fax receiving tones, which are loud, chirping sounds. A receiving fax chirps for about 40 seconds over the phone line, and the LCD shows Receiving.

If your machine is set to the Fax Only mode, it will answer every call automatically with fax receiving tones. If the other person hangs up, your machine will continue to send the "chirps" for about 40 seconds. and the LCD continues to show Receiving. To cancel receiving, press Stop/Exit.

The fax 'handshake' is the time in which the sending machine's CNG tones and the receiving machine's "chirps" overlap. This must be for at least 2 to 4 seconds, so both machines can understand how each is sending and receiving the fax. The handshake cannot begin until the call is answered, and the CNG tones only last for about 60 seconds after the number is dialled. So it is important for the receiving machine to answer the call in as few rings as possible.



When you have an external Telephone Answering Device (TAD) on your fax line, your TAD will decide the number of rings before the call is answered.

Pay special attention to the directions for connecting a TAD in this chapter. (See Connecting an external telephone answering device (TAD) on page 1-10.)

ECM (Error Correction Mode)


The Error Correction Mode (ECM) is a way for the machine to check a fax transmission while it is in progress. If the machine detects errors during fax transmission, it resends the pages of the fax that had an error. ECM transmissions are only possible between fax machines that both have this feature. If they do, you may send and receive fax messages that are continuously being checked by the machine.

Your machine must have enough memory for this feature to work.

Connecting the machine

Connecting an external telephone

You can connect a separate telephone (or telephone answering device) directly to your machine as shown in the diagram below.

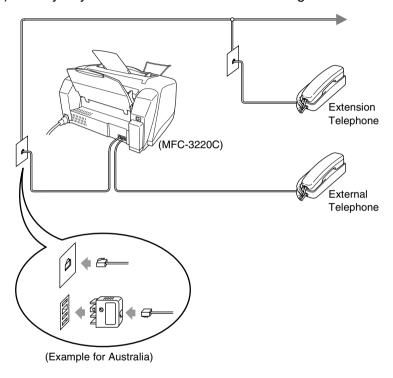

When this phone (or TAD) is in use, the LCD shows ${\tt Telephone}.$

Connecting an external telephone answering device (TAD)

Sequence


You may choose to connect an answering device. However, when you have an external TAD on the same telephone line as the machine, the TAD answers all calls and the machine "listens" for fax calling (CNG) tones. If it hears them, the machine takes over the call and receives the fax. If it doesn't hear CNG tones, the machine lets the TAD continue playing your outgoing message so your caller can leave you a voice message.

The TAD must answer within four rings (the recommended setting is two rings). The machine cannot hear CNG tones until the TAD has answered the call, and with four rings there are only 8 to 10 seconds of CNG tones left for the fax "handshake". Make sure you carefully follow the instructions in this guide for recording your outgoing message. We do not recommend using the toll saver feature on your external answering machine if it exceeds five rings.



If you do not receive all your faxes, reduce the Ring Delay setting on your external TAD.

Unless you are using Distinctive Ring, do not connect a TAD elsewhere on the same phone line.

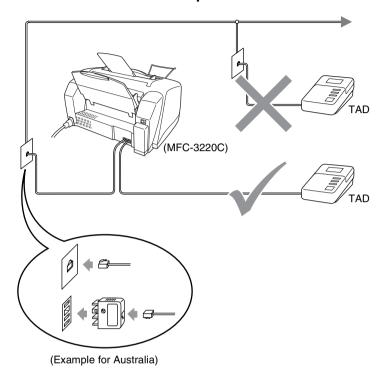

When the TAD is in use, the LCD shows Telephone.

Connections


The external TAD must be connected as shown above.

- 1 Set your external TAD to one or two rings. (The machine's Ring Delay setting does not apply.)
- 2 Record the outgoing message on your external TAD.
- 3 Set the TAD to answer calls.
- **4** Set the Receive Mode to External TAD. (See Choosing the Receive Mode on page 5-1.)

Recording outgoing message (OGM) on an external TAD

Timing is important in recording this message. The message sets up the ways to handle both manual and automatic fax reception.

- 1 Record 5 seconds of silence at the beginning of your message. (This allows your machine time to listen for the fax CNG tones of automatic transmissions before they stop.)
- 2 Limit your speaking to 20 seconds.
- 3 End your 20-second message by giving your Fax Receive Code for people sending manual faxes. For example: "After the beep, leave a message or send a fax by pressing * 51 and Start."



Multi-line connections (PBX)

Most offices use a central telephone system. While it is often relatively simple to connect the machine to a key system or a PBX (Private Branch Exchange), we suggest that you contact the company that installed your telephone system and ask them to connect the machine for you. It is advisable to have a separate line for the machine. You can then leave the Receive Mode set to Fax Only to receive faxes any time of the day or night.

If the machine is to be connected to a multi-line system, ask your installer to connect the unit to the last line on the system. This prevents the unit from being activated each time a telephone call is received.

If you are installing the machine to work with a PBX

- 1 It is not guaranteed that the unit will operate properly under all circumstances with a PBX. Any cases of difficulty should be reported first to the company that handles your PBX.
- 2 If all incoming calls will be answered by a switchboard operator, it is recommended that the Receive Mode be set to Manual. All incoming calls should initially be regarded as telephone calls.

Custom features on your phone line

If you have Voice Mail, Call Waiting, Call Waiting/Caller ID, Caller ID RingMaster, an answering service, an alarm system or other custom feature on one phone line it may create a problem with the operation of your machine. (See *Custom features on a single line.* on page 12-9.)

2 Loading documents and paper

Load documents


You can send a fax copy and scan from the ADF (automatic document feeder).

Using the automatic document feeder (ADF)

- Documents must be between 8.9 and 21.6 cm wide and 12.7 and 35.6 cm long.
- Make sure you place documents face down, top edge first.
- Adjust the paper guides to fit the width of your document.


Recommended environment

Temperature: 20° C - 30° C Humidity: 50% - 70% Paper: 80 gsm A4

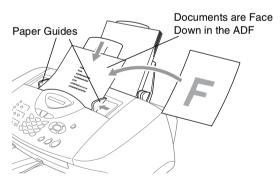

■ The automatic document feeder (ADF) can hold up to 20 pages, feeding each one individually through the machine. Use standard (80 gsm) paper when using the ADF.

Fan the paper, and then stagger the pages in the ADF as shown:

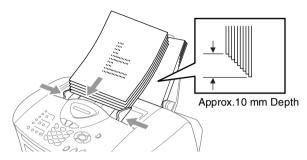

DO NOT use curled, wrinkled, folded, or ripped paper, or paper with staples, paper clips, paste or tape attached. **DO NOT** use cardboard, newspaper or fabric.

Make sure documents written with ink are completely dry.



DO NOT pull on the document while it is in progress.

About paper

The print quality of your document can be affected by the kind of paper you use in the machine.

To get the best print quality for the settings you've chosen, always set the Paper Type to match the type of paper you load.

You can use plain paper, inkjet paper (coated paper), glossy paper, transparencies and envelopes.

We recommend testing various paper types before purchasing large quantities.

For best results, use the recommended paper.



When you print on inkjet paper (coated paper), transparencies and glossy paper, be sure to select the proper media in the "Basic" tab in the printer driver or in the Paper Type setting in the menu (Menu/Set, 1, 2).

Also avoid stacking by removing each page after it exits the machine to avoid smudging.

Handling and using special paper

- Store paper in its original packaging, and keep it sealed. Keep the paper flat and away from moisture, direct sunlight and heat.
- The coated side of glossy paper is shiny. Avoid touching the shiny (coated) side. Load glossy paper with the shiny side facing up toward you.
- Avoid touching either side of transparencies, because they absorb water and perspiration easily, and this may cause decreased output quality. Transparencies designed for laser printers/copiers may stain your next document. Use only transparencies recommended for inkjet printing.

Paper capacity of the paper tray

Paper Type	Paper Size	Number of sheets
Plain Paper	Letter, Executive,	100 of 80 gsm
(Cut Sheet)	A4, A5, A6, B5 (JIS)	up to 10 mm
	Legal	50 of 80 gsm
Inkjet Paper	Letter	20
Glossy Paper	Letter, A4	20
Transparencies	Letter, A4	10
Envelopes	DL, COM-10, C5, Monarch, JE4	10
Photo Card	102 mm X 152 mm, L (89 mm X 127 mm), 2L (127 x 178 mm)	30
Index Card	127 mm x 203 mm	30

^{*} You can copy only on A4, A5 and Photo Card (102 mm X 152 mm) paper.

Paper specifications for the paper tray

Cut Sheet Paper	Plain Paper: 64 to 120 gsm
Weight	Inkjet Paper: 64 to 200 gsm
	Glossy Paper: Up to 220 gsm
	Index card: Up to 120 gsm
Thickness	Plain Paper: 0.08 to 0.15 mm
	Inkjet Paper: 0.08 to 0.25 mm
	Glossy Paper: Up to 0.25 mm
	Envelopes: Up to 0.52 mm
	Photo Card: Up to 0.42 mm
	Index card: Up to 0.15 mm


^{*} You can receive faxes only on A4 paper.

Paper capacity of the output paper support

Output Paper	Up to 50 sheets of 80 gsm (A4)
Support	 Transparencies and glossy paper must be picked up from the output paper support one
	page at a time to avoid smudging.
	Legal cannot be stacked on the output paper support.

O Do not use paper or envelopes:

■ that are damaged, curled, wrinkled, or irregularly shaped

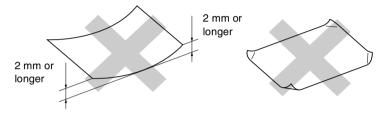


- that are extremely shiny or highly textured
- that were previously printed by a printer
- that cannot be arranged uniformly when stacked
- that are made with a short grain

Do not use envelopes:

- that are of a baggy construction
- that are embossed (have raised writing on them)
- that have clasps on them
- that are not sharply creased
- that are preprinted on the inside

Printable area

The printable area depends on the settings in the application you are using. The figures below show the unprintable areas on cut sheet paper and envelopes.

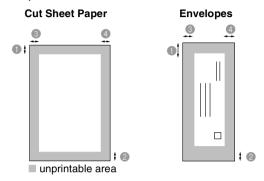

Paper	Paper Size		1 Тор	2 Bottom	3Left	4 Right
Cut Sheet	A4	Fax	3 mm	12 mm	3 mm	3 mm
		Printer	3 mm	3 mm	3 mm	3 mm
		Сору	3 mm	3 mm	3 mm	3 mm
	A5	Printer	3 mm	3 mm	3 mm	3 mm
		Сору	3 mm	3 mm	3 mm	3 mm
	A6, JIS_B5, Exective	Printer	3 mm	3 mm	3 mm	3 mm
	Letter, Legal	Printer	3 mm	3 mm	6 mm	6 mm
Photo	102 mm x	Printer	3 mm	3 mm	3 mm	3 mm
Card	152 mm	Сору	3 mm	3 mm	3 mm	3 mm
	L, 2L	Printer	3 mm	3 mm	3 mm	3 mm
Index Card	127 mm x 203 mm	Printer	3 mm	3 mm	3 mm	3 mm
Envelopes	DL, C5, COM10, Monarch, JE4	Printer	10 mm	20 mm	3 mm	3 mm



Printable area depends on the Printer driver settings.

The figures above are approximate and the printable area may vary depending on the type of cut sheet paper you are using.


How to load paper and envelopes

To load paper or other media


1 Fan the stack of paper well to avoid paper jams and mis-feeds.



2 Unfold the paper support, and press and slide the paper guide to fit the paper width.

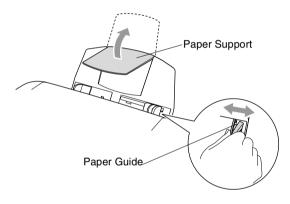

3 Gently insert the paper. Make sure the print side is towards you and the paper is below the maximum paper mark.

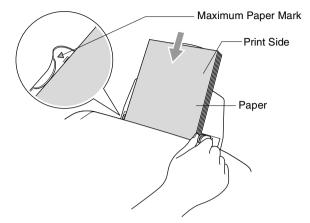

To load glossy paper


- Fan the stack of glossy paper well.
- 2 Put a sheet of plain paper in the paper tray first, and then put the stack of glossy paper on top of it.
- f If the glossy sheets are 'double-feeding', put one sheet in the paper tray at a time.

To load envelopes


1 Before loading, press the corners and sides of the envelopes to make them as flat as possible.



/ If the envelopes are 'double-feeding', put one envelope in the paper tray at a time.



Press and slide the paper guide to fit the width of the envelopes. Insert them into the paper tray with the address side toward you and pointed in the direction below.

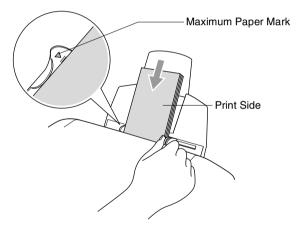

On-screen programming

User-friendly programming

Your machine is designed to be easy to use with LCD on-screen programming using the navigation keys. User-friendly programming helps you take full advantage of all the menu selections your machine has to offer.

Since your programming is done on the LCD, we have created step-by-step on-screen instructions to help you program your machine. All you need to do is follow the instructions as they guide you through the menu selections and programming options.

Menu table

You can probably program your machine without the User's Guide if you use the Menu table that begins on page 3-3. These pages will help you understand the menu selections and options that are found in the machine's programs.



You can program your machine by pressing Menu/Set, followed by the menu numbers.

For example to set Fax Resolution to Fine:


Press Menu/Set, 2, 2, 2 and or to select Fine.

Press Menu/Set.

Memory storage

If there is a power failure, you will not lose your menu settings because they are stored permanently. Temporary settings (such as Contrast, Overseas Mode, and so on) will be lost. You may also have to reset the date and time.

Navigation keys

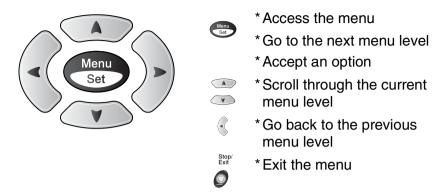

You can access the menu mode by pressing **Menu/Set**. When you enter the menu, the LCD scrolls.

Press 1 for General Setup menu	1.General Setup
—OR—	
Press 2 for Fax menu	2.Fax
—OR—	
Press 3 for Copy menu	(3.Copy
Press 0 for Initial Setup	0.Initial Setup

You can scroll more quickly through each menu level by pressing the arrow for the direction you want: or .

Then set an option by pressing **Menu/Set** when that option appears on the LCD.

The LCD will then show the next menu level.

Press or to scroll to your next menu selection.

Press Menu/Set.

When you finish setting an option, the LCD shows Accepted.

Use to scroll backward if you passed your choices or want to save keystrokes.

Press the Menu numbers. (ex. Press 1, 2 for Paper Type) -OR-













Main Menu	Submenu	Menu Selections	Options	Descriptions	Page
1.General Setup	1.Mode Timer		5 Mins 2 Mins 1 Min 30 Secs (MFC-3220C only) 0 Sec (FAX-1820C only) Off	Sets the time to return to Fax mode.	4-5
	2.Paper Type	_	Plain Inkjet Glossy (4-Color or 3-Color) Transprncy	Sets the type of paper in the paper tray.	4-6
	3.Volume	1.Ring	High Med Low Off	Adjusts the ring volume.	4-7
		2.Beeper	High Med Low Off	Adjusts the volume level of the beeper.	4-7
		3.Speaker	High Med Low Off	Adjusts the speaker volume.	4-8
	4.P.Save setting	_	Fax Receive: On Off	Customizes the Power Save key not to receive fax in Standby mode.	4-8



Press the Menu numbers. (ex. Press 1, 2 for Paper Type) OR Nenu Set Stop Exit to to to to exit

Main Menu	Submenu	Menu Selections	Options	Descriptions	Page
2.Fax	1.Setup Receive (In Fax mode only)	1.Ring Delay	02-10 (Example for Australia)	Sets the number of rings before the machine answers in Fax or Fax/Tel mode.	5-3
		2.F/T Ring Time	70 Sec 40 Sec 30 Sec 20 Sec (Example for Australia)	Sets the pseudo/double-ring time in Fax/Tel mode.	5-4
		3.Fax Detect	On Semi (FAX-1820 only)	Receives fax messages without pressing the Start key.	5-5
		4.Remote Code	on (*51, #51) (*91, #91 for New Zealand) Off	You can answer all calls at an extension or external phone and use codes to turn the machine on or off. You can personalize these codes.	5-10
		5.Auto Reduction	On Off	Reduces the size of incoming faxes.	5-7
	6.Memory Receive	On Off	Automatically stores any incoming faxes in its memory if it runs out of paper.	5-11	
		7.Polling RX	Standard Secure Timer	Sets up your machine to poll another fax machine.	5-12



Press the Menu numbers. (ex. Press 1, 2 for Paper Type) -ORto to Select & Set Select & Set accept exit

Main Menu	Submenu	Menu Selections	Options	Descriptions	Page
2.Fax (Continued)	2.Setup Send (In Fax mode only)	1.Contrast	Auto Light Dark	Changes the lightness or darkness of faxes you send.	6-6
		2.Fax Resolution	Standard Fine S.Fine Photo	Sets the default resolution for outgoing faxes.	6-7
		3.Delayed Fax	_	Set the time of day in 24 hour format that the delayed faxes will be sent.	6-14
		4.Batch TX	On Off	Combines delayed faxes to the same fax number at the same time of day into one transmission.	6-15
		5.Real Time	Off On Next Fax Only	You can send a fax without using the memory.	6-9
		6.Polled TX	Standard Secure	Sets up the document on your machine to be retrieved by another fax machine.	6-16
		7.0verseas Mode	On Off	Adjusts for overseas transmissions, which can sometimes cause problems.	6-13



Press the Menu numbers. (ex. Press 1, 2 for Paper Type) OR— Store Exit Set Set To to to Select & Set Select & Set Select & Set


Main Menu	Submenu	Menu Selections	Options	Descriptions	Page
2.Fax (Continued)				Stores One-Touch Dial numbers, so you can dial by pressing one key (and Start).	7-1
		2.Speed-Dial	_	Stores Speed-Dial numbers, so you can dial by pressing only a few keys (and Start).	7-2
		3.Setup Groups		Sets up a Group number for Broadcasting.	7-4
	4.Report Setting	1.Transmission	On On+Image Off Off+Image	Initial setup for Transmission Verification Report and Fax Journal.	9-1
		2.Journal Period	Every 7 Days Every 2 Days Every 24 Hours Every 12 Hours Every 6 Hours Every 50 Faxes Journal:Off		9-2
	5.Remote Fax Opt	1.Fax Forward	On Off	Sets the machine to forward fax messages.	8-1
		2.Fax Storage	On Off	Stores incoming faxes in the memory so you can retrieve them while you are away from your machine.	8-2



Press the Menu numbers. (ex. Press 1, 2 for Paper Type) -ORto to Select & Set Select & Set accept exit

Main Menu	Submenu	Menu Selections	Options	Descriptions	Page
2.Fax (Continued)	5.Remote Fax Opt (Continued)	3.Remote Access	_*	You must set your own code for Remote Retrieval.	8-3
		4.Print Document	_	Prints incoming faxes stored in the memory.	5-8
	6.Remaining Jobs	_	_	Checks which jobs are in the memory or cancels a delayed fax or polling job.	6-10
	0. Miscellaneous	1.TX Lock (1.Key Lock)	_	Prohibits most functions except receiving faxes.	6-18
		2.Distinctive (Not available in New Zealand)	On Off	Use with phone company distincive ringing service to register the ring pattern with the machine.	6-22 6-31
		2.Faxability (Only for New Zealand)	On Off	If you have FaxAbility from Telecom, you can use this function to store the ringing pattern of your fax number. And if you set in to ON, you should use the registered number only.	6-26
	The feet and	3.Caller ID	Display# Print Report	View or print a list of the last 30 Caller IDs stored in memory.	6-23 6-29 6-32



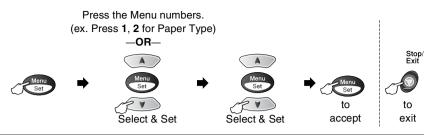

Main Menu	Submenu	Menu Selections	Options	Descriptions	Page
3.Сору	1.Quality		Best Normal Fast	Selects the Copy resolution for your type of document.	10-16
	2.Brightness	_	-0000 + -0000 + -0000 + -0000 +	Adjusts the brightness.	10-16
	3.Contrast	_	-0000#+ -0000+ -0000+ -0000+	Adjusts the contrast for copies.	10-16
	4.Color Adjust	1.Red	R:-0000 + R:-0000 + R:-0000 + R:-0000 +	Adjusts the amount of Red in copies.	10-17
		2.Green	G:-0000 + G:-0000 + G:-0000 + G:-0000 +	Adjusts the amount of Green in copies.	
		3.Blue	B:-0000 + B:-000 0 + B:-0000 + B:-0000 + B:-0000 +	Adjusts the amount of Blue in copies.	
4.Test Print				You can print a test sample page to check the print quality and adjust the Vertical Alignment.	12-11



Press the Menu numbers. (ex. Press 1, 2 for Paper Type) -ORto to Select & Set Select & Set accept exit

Main Menu	Submenu	Menu Selections	Options	Descriptions	Page
5.Print	1.Help List	_	_	You can print these	9-3
Reports	2.Quick-Dial	_	_	lists and reports.	
	3.Fax Journal	_	_		
	4.XMIT Verify	_	_		
	5.User Settings	_	_		
0.Initial Setup	1.Receive Mode	_	Fax Only Fax/Tel External TAD Manual	You can choose the receive mode that best suits your needs.	5-1 5-2
	2.Date/Time	_	_	Puts the date and time on the LCD and in headings of faxes you send.	4-1
	3.Station ID	_	Fax Name	Program your name and fax number to appear on each page you fax.	4-2
	4.Tone/Pulse (Not available in New Zealand)	_	Tone Pulse	Selects the dialling mode.	4-4



4 Getting started

Initial Setup

Setting the Date and Time

Your machine displays the date and time and if you set up the Station ID it prints on every fax you send. If there is a power failure, you may have to reset the date and time. All other settings will not be affected.

1 Press Menu/Set, 0, 2.

2.Date/Time

2 Enter the last two digits of the year.

Year:20XX

Press Menu/Set.

3 Enter two digits for the month.

Month:XX

Press Menu/Set.

(For example, enter 09 for September, or 10 for October.)

4 Enter two digits for the day.

Day:XX

Press Menu/Set.

(For example, enter 06 for 6th.)

5 Enter the time in 24-Hour format.

Time:XX:XX

Press Menu/Set

(For example, enter 15:25 for 3:25 P.M.)

6 Press Stop/Exit.

The LCD now shows the date and time whenever the machine is in Fax mode.

Setting the Station ID

You should store your name or company name and fax number to be printed on all fax pages that you send.

It is important that you enter the fax number in the internationally standardised format, i.e. in accordance with the following strict sequence:

- The "+" (plus) character (by pressing * key)
- Your Country Code (e.g. "61" for Australia, "64" for New Zealand)
- Your local area code minus any leading "0"
- A space
- Your number on the local exchange, using spaces to aid readability as appropriate.

As an example, if the machine is installed in Australia and the same line is to be used for both fax and voice calls, and your national telephone number is 0161 444 5555, then you must set the fax and telephone number parts of your station ID as: +61 161 444 5555.

1	Press	Menu	ı/Set,	0, 3.

3.Station ID

2 Enter your fax number (up to 20 digits).

Fax:

Press Menu/Set



You cannot enter a hyphen.

Use the dial pad to enter your name (up to 20 characters).

Name:

Press Menu/Set.

4 Press Stop/Exit.

The LCD will go back standby mode automatically.



If the Station ID has already been programmed, the LCD will ask you to press 1 to make a change or 2 to exit without changing.

Entering text

When you are setting certain functions, such as the Station ID, you may need to type text into the machine. Most number keys have three or four letters printed above them. The keys for $\mathbf{0}$, $\mathbf{\#}$ and $\mathbf{\times}$ do not have printed letters because they are used for special characters.

By pressing the appropriate number key repeatedly, you can access the character you want.

Press Key	one time	two times	three times	four times
2	Α	В	С	2
3	D	E	F	3
4	G	Н	1	4
5	J	K	L	5
6	M	N	Ο	6
7	Р	Q	R	S
8	Т	U	V	8
9	W	X	Υ	Z

Inserting spaces

To enter a space, press \supset once between numbers and twice between characters.

Making corrections

If you entered a letter incorrectly and want to change it, press to move the cursor under the incorrect character. Then press **Stop/Exit**. All letters above and to the right of the cursor will be deleted. Re-enter the correct character. You can also back up and type over incorrect letters.

Repeating letters

If you need to enter a character that is on the same key as the previous character, press \nearrow to move the cursor to the right before you press the key again.

Special characters and symbols

Press \star , # or $\mathbf{0}$, and then press $\mathbf{0}$ or $\mathbf{0}$ to move the cursor under the special character or symbol you want. Then press **Menu/Set** to select it.

Press ★ for (space)!"#\$%&'() ★ +,-./€

Press # for :; <=>? @ []^_ Press $\mathbf{0}$ for $\ddot{A} \ddot{E} \ddot{O} \ddot{U} \dot{A} \ddot{C} \dot{E} \dot{E} 0$

Setting Tone or Pulse dialing mode (Not available in New Zealand)

Your machine comes set for Tone dialing service (multi-frequency). If you have Pulse dialing service (rotary), you need to change the dialing mode.

1 Press Menu/Set, 0, 4.

4.Tone/Pulse

Press or to select Pulse (or Tone).

Press Menu/Set.

3 Press Stop/Exit.

PABX and TRANSFER

The machine is initially set to be connected with PSTN (Public Switched Telephone Network) lines. However, many offices use a central telephone system or Private Automatic Branch Exchange (PABX). Your fax can be connected to most types of PABX. The recall facility on the machine supports timed break recall only (TBR), PABX normally can work with this for gaining access to an outside line, or for transferring a call to another extension: The feature works when the **Recall** key is pressed with **Shift** key.

General Setup

Setting the Mode Timer (MFC-3220C only)

The machine has three temporary mode keys on the control panel: Fax, Copy and Scan. You can change the number of seconds or minutes the machine takes after the last Copy or Scan operation before it returns to Fax mode. If you select Off, the machine stays in the mode you used last.




1 Press Menu/Set, 1, 1.

- 1.Mode Timer
- Press or to select
 0 Sec, 30 Secs, 1 Min, 2 Mins, 5 Mins or Off.
- 3 Press Menu/Set.
- 4 Press Stop/Exit.

Setting the Mode Timer (FAX-1820C only)

The machine has two temporary mode keys on the control panel: Fax and Copy. You can change the number of seconds or minutes the machine takes after the last Copy operation before it returns to Fax mode. If you select Off, the machine stays in the mode you used last.



1 Press Menu/Set, 1, 1.

- 1.Mode Timer
- Press or to select
 0 Sec, 30 Secs, 1 Min, 2 Mins, 5 Mins or Off.
- 3 Press Menu/Set.
- 4 Press Stop/Exit.

Setting the Paper Type

To get the best print quality, set the machine for the type of paper you are using.

1 Press **Menu/Set**, **1**, **2**.

2.Paper Type

Press or to select Plain, Inkjet, Glossy Or Transprncy.

Press Menu/Set.

3 If you selected Glossy, press or to select Glossy: 4-Color or Glossy: 3-Color.

Press Menu/Set.



4 Press Stop/Exit.

The machine ejects paper with printed surfaces face up onto the paper tray in the front of the machine. When you use transparencies or glossy paper, remove each sheet immediately to prevent smudging or paper jams.

Setting the Ring Volume

You can adjust the ring volume when your machine is idle (not being used). You can turn the ring Off or you can select the ring volume level.

1 Press Menu/Set, 1, 3, 1.

1.Ring

- Press or to select (Low, Med, High or Off).
 - Press Menu/Set.
- 3 Press Stop/Exit.

-OR-

In Fax mode, press or to adjust the volume level. Every time you press these keys, the machine will ring so you can hear the active setting as the LCD shows it. The volume changes with each key press. The new setting will stay until you change it again.

Setting the Beeper Volume

You can change the beeper volume. The default (factory) setting is ${ t Low}$. When the beeper is on, the machine beeps every time you press a key or make a mistake and after a fax is sent or received.

1 Press Menu/Set, 1, 3, 2.

- 2.Beeper
- Press or to select your
 option.
 (Low, Med, High or Off)

Press Menu/Set

3 Press Stop/Exit.

Setting the Speaker Volume

You can adjust the machine's one-way speaker volume.

1 Press Menu/Set, 1, 3, 3.

3.Speaker

Press or to select (Low, Med, High or Off).

Press Menu/Set.

3 Press Stop/Exit.

Power Save Setting

You can customise the machine's **Power Save** key. The default mode is On. Your machine can receive faxes or calls even if the machine is Power Save mode. If you want to have your machine not to receive faxes or calls, turn this setting to Fax Receive:Off. (See *Turning the machine to Power Save condition* on page 1-5.)

1 Press Menu/Set, 1, 4.

4.P.Save setting

- **2** Press or to select of f (or on).
- 3 Press Menu/Set.
- 4 Press Stop/Exit.

5 Setup Receive

Basic receiving operations

Choosing the Receive Mode

There are four different Receive Modes for your machine. You can choose the mode that best suits your needs.

LCD	How it works	When to use it
Fax Only (automatic receive)	The machine automatically answers every call as a fax.	For dedicated fax lines.
Fax/Tel* (fax and telephone) (with an external or extension telephone for without handset models)	The machine controls the line and automatically answers every call. If the call is a fax it will receive the fax. If the call is not a fax it will ring (pseudo/double ring) for you to pick up the call.	Use this mode if you expect to receive lots of fax messages and few telephone calls. You cannot have an answering machine on the same line, even if it is on a separate wall socket/phone socket on the same line. You cannot use the telephone company's Voice Mail in this mode.
External TAD (with an external answering machine)	The external answering machine (TAD) automatically answers every call. Voice messages are stored on the external TAD. Fax messages are printed.	Use this mode if you have connected an answering machine on your phone line. The TAD setting works only with an external answering machine. Ring Delay and F/T Ring Time do not work in this setting.
Manual (manual receive) (with an external or extension telephone for without handset models or with Distinctive Ring)	You control the phone line and must answer every call yourself.	Use this mode when you are using a computer modem on the same line or if you don't receive many fax messages or with Distinctive Ring. If you answer and hear fax tones, wait until the machine takes over the call, then hang up. (See Fax Detect (MFC-3220C only) on page 5-5 or Fax Detect (FAX-1820C only) on page 5-6.)

^{*} In Fax/Tel mode you must set the Ring Delay and F/T Ring Time.

To select or change your Receive Mode

1 If it is not illuminated in green, press



2 Press Menu/Set, 0, 1.


1.Receive Mode

3 Press or to select
Fax Only, Fax/Tel, External TAD or Manual.

Press Menu/Set.

4 Press Stop/Exit.

If you are changing the Receive Mode while in another operation, the LCD will return to that operation.

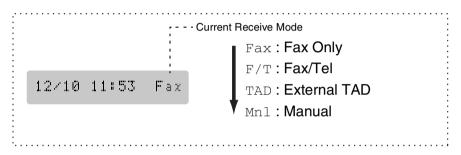

Setting the Ring Delay

The Ring Delay sets the number of times the machine rings before it answers in Fax only or Fax/Tel mode. If you have extension phones on the same line as the machine or subscribe to the telephone company's Distinctive Ring service, keep the Ring Delay setting of 4.

(See Fax Detect (MFC-3220C only) on page 5-5, Fax Detect (FAX-1820C only) on page 5-6 and Operation from extension telephones on page 5-9.)

1 If it is not illuminated in green, press



2 Press Menu/Set, 2, 1, 1.

1.Ring Delay

Press or to select how many times the line rings before the machine answers (02-10 for Australia, 01-10 for New Zealand, 00-10 for some countries).

Press Menu/Set.

(If you select 00, the line won't ring at all.)

4 Press Stop/Exit.

Setting the F/T Ring Time (Fax/Tel mode only)

If you set the Receive Mode to Fax/Tel, you'll need to decide how long the machine will signal you with its special pseudo/double-ring when you have a *voice* call. (If it's a fax call, the machine prints the fax.)

This pseudo/double-ring happens after the initial ringing from the phone company. Only the machine rings and no other phones on the same line will ring with the special pseudo/double-ring. However, you can still answer the call on the same line as the machine (FAX-1820C only) or on any extension phone (in a separate wall socket/phone socket) on the same line as the machine. (See *Operation from extension telephones* on page 5-9.)

1 If it is not illuminated in green, press

⋌ (Fax).

2 Press Menu/Set, 2, 1, 2.

2.F/T Ring Time

Press or to select how long the machine will ring to alert you that you have a voice call (20, 30, 40 or 70 seconds).

Press Menu/Set.

4 Press Stop/Exit.



Even if the caller hangs up during the pseudo/double-ringing, the machine will continue to ring for the set time.

Fax Detect (MFC-3220C only)

When you use this feature, you don't have to press **Mono Start**, Colour Start, or the Fax Receive Code * 51 (* 91 for New Zealand) when you answer a fax call. Selecting on allows the machine to receive fax calls automatically, even if you lift the handset of an extension or external phone. When you see Receiving on the LCD or when you hear 'chirps' through the handset of an extension phone connected to another phone socket, just replace the handset and your machine will do the rest. Selecting Off means you'll have to activate the machine yourself by lifting the handset of an external or extension phone, and then press Mono Start or Colour Start on the machine—OR—by pressing * 51 (* 91 for New Zealand) if you are not at your machine. (See Operation from extension telephones on page 5-9.)



If this feature is set to On, but your machine doesn't connect a fax call when you lift an extension or external phone handset. press the Fax Receive Code + 51 (+ 91 for New Zealand). If you send faxes from a computer on the same phone line and the machine intercepts them, set Fax Detect to Off.

If it is not illuminated in green, press



2 Press Menu/Set, 2, 1, 3.

3.Fax Detect

Use or to select on (or off).

Press Menu/Set.

4 Press Stop/Exit.

Fax Detect (FAX-1820C only)

When you use this feature, you don't have to press **Mono Start** or Colour Start, or the Fax Receive Code * 51 (* 91 for New Zealand) when you answer a fax call. Selecting on allows the machine to receive fax calls automatically, even if you lift the handset of an extension or external phone. When you see Receiving on the LCD or when you hear (chirps) through the handset of an extension phone connected to another phone socket, just replace the handset and your machine will do the rest. Selecting Semi lets the machine receive the call only if you've answered it at the machine. Selecting Off means you'll have to activate the machine yourself by lifting the handset of an external or extension phone, and then press Mono Start or Colour Start on the machine—OR—by pressing

*51 (*91 for New Zealand) if you are not at your machine. (See Operation from extension telephones on page 5-9.)



If this feature is set to On, but your machine doesn't connect a fax call when you lift an extension or external phone handset, press the Fax Receive Code + 51(+91 for New Zealand). If you send faxes from a computer on the same phone line and the machine intercepts them, set Fax Detect to Off.

If it is not illuminated in green, press



3.Fax Detect

Press Menu/Set, 2, 1, 3.

Use or to select On, Semi or Off.

Press Menu/Set.

4 Press Stop/Exit.

Printing a reduced incoming fax (Auto Reduction)

If you choose On, the machine reduces an incoming fax automatically, so that it fits on to one page of A4 size paper.

If it is not illuminated in green, press



2 Press Menu/Set, 2, 1, 5.

5.Auto Reduction

Use or to select on (or off).

Press Menu/Set.

4 Press Stop/Exit.



If you receive faxes that are split onto two pages, turn on this setting. But if sending document is too long, the machine may print it on two pages.



If left and right margins are cut off, turn on this setting.

Receiving a fax at the end of a conversation (FAX-1820C only)

At the end of a conversation you can ask the other party to fax you information before you both hang up.

- Ask the other party to place the document in their machine and to press Start. Tell the other party to wait until your machine sends receiving tones (chirps) before hanging up.
- 2 When you hear the other machine's CNG tones (beeps), press Mono Start or Colour Start.
- 3 If you picked up the handset, replace it.

Printing a fax from the memory

If you set Fax Storage to ON for Remote Retrieval, you can still print a fax from the memory when you are at your machine. (See *Setting Fax Storage* on page 8-2.)

1 Press Menu/Set, 2, 5, 4.

(4. Print Document)

- 2 Press Mono Start or Colour Start.
- 3 After printing has finished, press Stop/Exit.

Advanced receiving operations

Operation from extension telephones

If you answer a fax call on an extension telephone, or an external telephone, you can make your machine take the call by using the Fax Receive Code. When you press the Fax Receive Code * 51 (* 91 for New Zealand), the machine starts to receive a fax. (See Fax Detect (MFC-3220C only) on page 5-5 or Fax Detect

(FAX-1820C only) on page 5-6.)

If the machine answers a voice call and pseudo/double-rings for you to take over, use the Telephone Answer Code #51 (#91 for New Zealand) to take the call at an extension phone. (See Setting the F/TRing Time (Fax/Tel mode only) on page 5-4.)

If you answer a call and no one is on the line, you should assume that vou're receiving a manual fax.

■ Press + 51 (+91 for New Zealand) and wait for the chirp or until the machine's LCD displays Receiving, and then hang up.

Your caller will have to press **Start** to send the fax.

For Fax/Tel mode only

When the machine is in Fax/Tel mode, it will use the F/T Ring Time (pseudo/double-ringing) to alert you to pick up a voice call.

If you're at the machine, you can lift the handset to answer. (FAX models only).

Lift the external telephone's handset, and then press **Hook** to answer.

If you're at an extension phone, you'll need to lift the handset during the F/T Ring Time and then press #51 (#91 for New Zealand) between the pseudo/double rings. If no one is on the line, or if someone wants to send you a fax, send the call back to the machine by pressing \times 51 (\times 91 for New Zealand).

Using a cordless external handset

If your cordless telephone is connected onto the line socket and you typically carry the cordless handset elsewhere, it is easier to answer calls during the Ring Delay. If you let the machine answer first, you will have to go to the machine so you can press **Hook** to transfer the call to the cordless handset.

Changing the remote codes

Remote Codes might not work with some telephone systems. The preset Fax Receive Code is *51 (*91 for New Zealand). The preset Telephone Answer Code is #51 (#91 for New Zealand).



If you are always disconnected when accessing your external TAD remotely, try changing the Fax Receive Code and Telephone Answer Code to another three-digit code (such as ### and 999).

If it is not illuminated in green, press



Press Menu/Set, 2, 1, 4.

4.Remote Code

Press or to select on (or off).

Press Menu/Set

- 4 If you want to, enter a new Fax Receive Code. Press Menu/Set
- 5 If you want to, enter a new Telephone Answer Code. Press Menu/Set
- 6 Press Stop/Exit.

Reception into memory (Not available for colour fax reception)

As soon as the paper tray becomes empty during fax reception, the screen will display Check Paper; please put some paper in the paper tray. (See *How to load paper and envelopes* on page 2-7.)

If the Memory Receive is On at this time...

The current fax reception will continue, with the remaining page(s) being stored in memory, subject to available memory. Subsequent incoming faxes will also be stored into memory until the memory is full, following this no further incoming fax call will be automatically answered. To print all data put fresh paper in the paper tray and press **Mono Start** or **Colour Start**.

If the Memory Receive is Off at this time...

The current fax reception will continue, with the remaining page(s) being stored in memory, subject to available memory. Subsequent incoming faxes calls will not be automatically answered until fresh paper is put in the paper tray. To print the last fax received, put paper in the paper tray and press **Mono Start** or **Colour Start**.

1 If it is not illuminated in green, press



2 Press Menu/Set, 2, 1, 6.

6.Memory Receive

3 Use or to select on (or off).

Press Menu/Set.

4 Press Stop/Exit.

Polling

Polling is the process of retrieving faxes from another fax machine. You can use your machine to 'poll' other machines, or you can have someone poll your machine.

Everyone who is involved in Polling needs to set up their fax machines for Polling. When someone polls your machine to receive a fax, they pay for the call. If you poll someone's fax machine to receive a fax, you pay for the call.



Some fax machines do not respond to the Polling feature.

Secure Polling

Secure Polling is a way to keep your documents and others from falling into the wrong hands while the machine is set up for polling. You can use Secure Polling only with another Brother fax machine. Anyone who polls to receive a fax must enter the polling secure code.

Setup for Polling Receive (Standard)

Polling Receive is when you call another fax machine to receive a fax from it.

1 If it is not illuminated in green, press



Press Menu/Set. 2. 1. 7.

7.Polling RX

Press or to select Standard.

Press Menu/Set.

4 Enter the fax number you are polling. Press Mono Start or Colour Start.

Setup for Polling Receive with Secure Code

You need to make sure you are using the same secure code as the other party.

- **1** If it is not illuminated in green, press $^{\circ}$
- **2** Press **Menu/Set**, **2**, **1**, **7**.

7.Polling RX

(Fax).

3 Press or to select Secure.

Press Menu/Set.

- 4 Enter a four-digit secure code.
 This is the same as the security code of the fax machine you are
- 5 Press Menu/Set.

polling.

- 6 Enter the fax number you are polling.
- 7 Press Mono Start or Colour Start.

Setup Delayed Polling Receive

You can set the machine to begin Polling Receive at a later time.

1 If it is not illuminated in green, press $^\circ$



Press Menu/Set, 2, 1, 7.

7.Polling RX

- 3 Press or to select Timer.
 - Press Menu/Set.
- 4 The screen prompts you to enter the time you want to begin polling.
- **5** Enter the time (in 24-hour format) you want to begin polling. For example, enter 21:45 for 9:45 PM.
- 6 Press Menu/Set.
- 7 Enter the fax number you are polling,

Press Mono Start or Colour Start.

The machine makes the polling call at the time you entered.

You can set up only one Delayed Polling.

Sequential Polling

The machine can request documents from several fax units in a single operation. You just specify several destinations in Step 5. Afterward, a Sequential Polling Report will be printed.

If it is not illuminated in green, press

(Fax).

Press Menu/Set, 2, 1, 7.

7.Polling RX

Press or to choose Standard, Secure or Timer.

> Press Menu/Set when the screen displays the setting you want.

- 4 If you selected Standard, go to Step 5.
 - If you selected Secure, enter a four-digit number and press Menu/Set, and then go to Step 5.
 - If you selected Timer, enter the time (in 24-hour format) you want to begin polling and press Menu/Set, and then go to Step 5.
- 5 Specify the destination fax machines (up to 100), which you wish to poll by using Speed-Dial, Search, a Group (see Setting up Groups for Broadcasting on page 7-4) or the dial pad. You must press **Menu/Set** between each location.
- 6 Press Mono Start or Colour Start.

The machine polls each number or group in turn for a document.



Press Stop/Exit while the machine is dialling to cancel the polling process.

To cancel all sequential polling receive jobs, press Menu/Set, **2**, **6**. (See *Cancelling a scheduled job* on page 6-11.)


6 Setup Send

How to fax

You can send faxes from the ADF (automatic document feeder).

Enter Fax mode

Before sending faxes, make sure (Fax) is illuminated in green. If not, press (Fax) to enter Fax mode. The default setting is Fax.



How to dial

There are four ways to dial.

Manual dialling


Press all of the digits of the phone or fax number.



One-Touch dialling

Press the One-Touch Key of the location you want to call. (See Storing One-Touch Dial numbers on page 7-1.)

To dial One-Touch numbers 6 to 10, hold down Shift as you press the One-Touch Key.





If the LCD shows Not Registered when you press the One-Touch key, number has not been stored on it.

Speed-Dialling

Press Search/Speed Dial, #, and then the two digit Speed-Dial number. (See Storing Speed-Dial numbers on page 7-2.)






f If the LCD shows Not Registered when you enter the Speed-Dial number, a number has not been stored for it.

Search

You can search for names you have stored in the One-Touch and Speed-Dial memories. Press **Search/Speed Dial** and the navigation keys to search. (See *Storing One-Touch Dial numbers* on page 7-1 and *Storing Speed-Dial numbers* on page 7-2.)

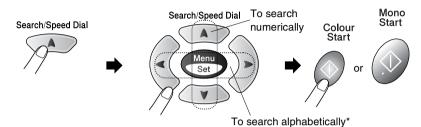

* To search alphabetically, you can use dial pad to enter the first letter of the name you are looking for.

Out of Memory message

If you get an Out of Memory message while scanning the first page of a fax, press **Stop/Exit** to cancel the scan. If you get an Out of Memory message while scanning a subsequent page, you will have the option to press **Mono Start** to send the pages scanned so far, or to press **Stop/Exit** to cancel the operation.



If the memory is full and you are faxing a single page, it will be sent in real time.



To gain extra memory, you can turn off Fax Storage. (See *Setting Fax Storage* on page 8-2.)

-OR-

Print the faxes that are in the memory. (See *Printing a fax from the memory* on page 5-8.)

Automatic transmission

This is the easiest way to send a fax.

- Do not pick up the handset of the machine (FAX-1820C)/ external phone (MFC-3220C) to listen for a dial tone
- 1 If it is not illuminated in green, press (Fax)
- **2** Load your document. (See *Load documents* on page 2-1.)
- 3 Enter the fax number using the dial pad, One-Touch, Speed-Dial or Search.
 (See How to dial on page 6-1.)
- 4 Press Mono Start or Colour Start.

Manual transmission

Manual transmission lets you hear the dialling, ringing and fax-receiving tones while sending a fax.

- 1 If it is not illuminated in green, press (Fax)
- **2** Load your document. (See *Load documents* on page 2-1.)
- **3** Pick up the handset of the machine (FAX-1820C)/ external phone (MFC-3220C) and listen for a dial tone.
- $m{4}$ On the external phone, dial the fax number you want to call.
- When you hear the fax tone, press Mono Start or Colour Start.
- 6 Replace the handset.

Sending a fax at the end of a conversation (FAX-1820C only)

At the end of a conversation you can send a fax to the other party before you both hang up.

- 1 Ask the other party to wait for fax tones (beeps) and then to press **Start** before hanging up.
- 2 If it is not illuminated in green, press (Fax)
- **3** Load your document. (See *Load documents* on page 2-1.)
- 4 Press Mono Start or Colour Start.
- **5** Replace the external handset, or the handset of the machine.

Basic sending operations

Sending faxes using multiple settings

When you send a fax you can choose any combination of these settings: contrast, resolution, overseas mode, delayed fax timer, polling transmission or real time transmission.

- 1 If it is not illuminated in green, press (Fax) before pressing Menu/Set. After each setting is accepted, the LCD will ask if you want to enter more settings:
- Press 1 to select more settings. The LCD will return to the Setup Send menu.

Next

-OR-

Press 2 if you have finished choosing settings and go to the next step.

Contrast

If your document is very light or very dark, you may want to set the contrast.

Use ${\tt Light}$ to send a light document or make the fax darker.

Use Dark to send a dark document or make the fax lighter.

1 If it is not illuminated in green, press



- 2 Load your document. (See Load documents on page 2-1.)
- 3 Press Menu/Set, 2, 2, 1.

1.Contrast

4 Press or to select Auto, Light or Dark.

Press Menu/Set.

5 Press **1** if you want to choose more settings and the LCD will return to the Setup Send menu.

-OR-

Press 2 if you have finished choosing settings.

6 Enter a fax number.

Press Mono Start or Colour Start.

Fax Resolution

You can use the **Fax Resolution** key to change the setting temporarily (for this fax only). In fax mode, press **Fax Resolution** and or to select the setting you want, and then press **Menu/Set**.

-OR-

You can change the default setting.

- 1 If it is not illuminated in green, press (Fax)
- 2 Load your document. (See Load documents on page 2-1.)
- 3 Press Menu/Set, 2, 2, 2.

2.Fax Resolution

4 Press or to select the resolution you want.

Press Menu/Set.

5 Press **1** if you want to choose more settings and the LCD will return to the Setup Send menu.

-OR-

Press 2 if you have finished choosing settings.

6 Enter a fax number.

Press Mono Start or Colour Start.

Standard Suitable for most typed documents.

Fine Good for small print and transmits a little

slower than Standard resolution.

S.Fine Good for small print or artwork and transmits

slower than Fine resolution.

Photo Use when the document has varying shades

of gray or photograph. This has the slowest

transmission time.

Manual and automatic fax Redial

If you are sending a fax manually and the line is busy, press **Redial/Pause**, and then press **Mono Start** or **Colour Start** to try again. If you want to make a second call to the last number dialled, you can save time by pressing **Redial/Pause** and **Mono Start** or **Colour Start**.

Redial/Pause only works if you dialled from the control panel. If you are sending a fax automatically and the line is busy, the machine will automatically redial up to three times at five minute intervals.

Colour fax transmission

Your machine can send a colour fax to machines that support this feature.

However, colour faxes cannot be stored in the memory, so Delayed fax and Polling Transmit features are not available.

- 1 If it is not illuminated in green, press (F
- 2 Load your document. (See Load documents on page 2-1.)
- 3 Enter the fax number using the dial pad, One-Touch, Speed-Dial or Search.
- 4 Press Colour Start.
- When you send a colour fax, the machine will send it in real time (even if Real Time TX is set to Off).

Dual Access (Not available for colour faxes)

You can dial a number, and begin scanning the fax into memory even when the machine is sending from memory or receiving faxes. The LCD shows the new job number and available memory.



// Your machine normally uses Dual Access. However, to send a colour fax, the machine will send the original in real time (even if Real Time TX is Off).

The number of pages you can scan into the memory will vary depending on the data that is printed on them.



If you get an Out of Memory message while scanning the first page of a fax, press Stop/Exit to cancel scanning. If you get an Out of Memory message while scanning a subsequent page. you can press **Mono Start** to send the pages scanned so far, or press Stop/Exit to cancel the operation.

Real Time Transmission

When you are sending a fax, the machine will scan the documents into the memory before sending. Then, as soon as the phone line is free, the machine will start dialling and sending.

If the memory becomes full, the machine will send the document in real time (even if Real Time TX is set to Off).

Sometimes, you may want to send an important document immediately, without waiting for memory transmission. You can set Real Time TX to On for all documents or for the next fax only.

- If it is not illuminated in green, press
- 2 Load your document. (See Load documents on page 2-1.)
- 3 Press Menu/Set, 2, 2, 5.

5.Real Time TX

4 To change the default setting, press or to select on (or off).

Press Menu/Set.

Go to Step 6.

-OR-

For the next fax transmission only, press \bigcirc or \bigcirc to select Next Fax Only.

Press Menu/Set.

5 Press or to select Next Fax:On (or Next Fax:Off).

Press Menu/Set.

6 Press 1 if you want to choose more settings and the LCD will return to the Setup Send menu.

-OR-

Press 2 if you have finished choosing settings.

7 Enter a fax number.

Press Mono Start or Colour Start.

In Real Time Transmission, the redial feature doesn't work.

If you are sending a colour Fax, the machine will send it in real time (even if Real Time TX is set to Off).

Checking job status

Check which jobs are still waiting in the memory to be sent. (If there are no jobs, the LCD shows ${\tt No}$ Jobs Waiting.)

1 Press Menu/Set, 2, 6.

6.Remaining Jobs

2 If you have more than one job waiting, press or to scroll through the list.

3 Press Stop/Exit.

Cancelling a job while scanning, dialling and sending the document

You can cancel a job while you are scanning it into memory by pressing **Stop/Exit**.

You can also cancel a job while the machine is dialling or sending the document by pressing **Stop/Exit**.

Cancelling a scheduled job

You can cancel a fax job that is stored and waiting in memory.

1 Press Menu/Set, 2, 6.

Any jobs that are waiting will appear on the LCD.

6.Remaining Jobs

2 If you have more than two jobs waiting, press or to select the job you want to cancel.

Press Menu/Set.

-OR-

If you only have one job waiting, go to Step 3.

3 Press 1 to cancel.

-OR-

Press 2 to exit without cancelling.

To cancel another job go to Step 2.

4 Press Stop/Exit.

Advanced sending operations

Broadcasting (Not available for Colour faxes)

Broadcasting is when the same fax message is automatically sent to more than one fax number. Using the **Menu/Set** key, you can include Groups, One-Touch, Speed-Dial numbers and up to 50 manually dialled numbers. If you did not use up any of the numbers for Groups, access codes or credit card numbers, you can 'broadcast' faxes to as many as 100 different numbers. However, the available memory will vary depending on the types of jobs in the memory and the number of locations used for broadcasting. If you broadcast to the maximum numbers available, you will not be able to use Dual Access and Delayed fax.

To include One-Touch or Speed-Dial numbers and manually dialled numbers in the same broadcast, you must press **Menu/Set** between each of the numbers. Use **Search/Speed Dial** to help you choose the numbers easily.

(See Setting up Groups for Broadcasting on page 7-4.)

After the broadcast is finished, a Broadcast Report will be printed to let you know the results.

- Enter the long dialling sequence numbers as you would normally, but remember that each One-Touch and Speed-Dial number counts as one number, so the number of locations you can store becomes limited.
- If the memory is full, press **Stop/Exit** to stop the job or if more than one page has been scanned, press **Mono Start** to send the portion that is in the memory.
 - 1 If it is not illuminated in green, press (Fax)
 - 2 Load your document. (See Load documents on page 2-1.)
 - 3 Enter a number using One-Touch, Speed-Dial, a Group number, Search or manual dialling using the dial pad. (Example: Group number)

4 When the LCD displays the fax number or name of the other party, press **Menu/Set**.

You will be asked to press the next number.

- 5 Enter the next number.
 - (Example: Speed-Dial number)
- 6 When the LCD displays the fax number or name of the other party, press Menu/Set.
- 7 Enter another fax number.(Example: Manual dialling using the dial pad.)
- 8 Press Mono Start.

Overseas Mode

If you are having difficulty sending a fax overseas due to possible interference on the phone line, we recommend that you turn on the Overseas Mode. After you send a fax using this feature, the feature will turn itself off.

- 1 If it is not illuminated in green, press
- 2 Load your document. (See Load documents on page 2-1.)
- **3** Press **Menu/Set**, **2**, **2**, **7**.

7.0verseas Mode

4 Press or to select on (or off).

Press Menu/Set.

Press 1 if you want to choose more settings and the LCD will return to the Setup Send menu.

-OR-

Press 2 if you have finished choosing settings.

6 Enter a fax number.

Press Mono Start or Colour Start.

Delayed Fax (Not available for colour faxes)

During the day you can store up to 50 faxes in the memory to be sent within 24 hours. These faxes will be sent at the time of day you enter in Step 4. Press **Menu/Set** to accept it, or enter another time for the faxes to be sent.

1 If it is not illuminated in green, press

Load vour document. (See Load documents on page 2-1.)

Press Menu/Set, 2, 2, 3.

3.Delayed Fax

Enter the time you want the fax to be sent (in 24-hour format).

Press Menu/Set.

(For example, enter 19:45 for 7:45 PM.)

Press 1 to leave the documents waiting in the ADF.

1.Doc 2.Memory

-OR-

Press 2 to scan the document into memory.

5 Press 1 if you want to choose more settings and the LCD will return to the Setup Send menu.

-OR-

Press 2 if you have finished choosing settings.

6 Enter a fax number.

Press Mono Start.

The number of pages you can scan into the memory depends on the amount of data that is printed on each page.

Delayed Batch Transmission (Not available for colour faxes)

Before sending the delayed faxes, your machine will help you economize by sorting all the faxes in the memory by destination and scheduled time. All delayed faxes that are scheduled to be sent at the same time to the same fax number will be sent as one fax to save transmission time.

1 If it is not illuminated in green, press

⋘∖ (Fax).

4.Batch TX

2 Press Menu/Set, 2, 2, 4.

Press or to select on (or off).

Press Menu/Set.

4 Press Stop/Exit.

Setup for Polled Transmit (Standard) (Not available for colour faxes)

Polled Transmit is when you set up the machine to wait with a document so another fax machine can retrieve it.

1 If it is not illuminated in green, press



- 2 Load your document. (See Load documents on page 2-1.)
- 3 Press Menu/Set, 2, 2, 6.
- **4** Press or to select Standard.

Press Menu/Set.

1.Doc 2.Memory

Press 1 to leave the documents waiting in the ADF.

-OR-

Press 2 to scan the document into memory.

5 Press **1** if you want to select additional settings. The display returns to the Setup Send menu.

-OR-

Press 2 if you finished selecting settings, and go to Step 5.

Press **Mono Start** and wait for the fax to be polled.

If you press **2** in Step 4, the document will be stored and can be retrieved from any other fax machine until you delete the fax in memory by using the Cancelling a job function. (See *Cancelling a scheduled job* on page 6-11.)

If you press 1 in Step 4, the document remains in the ADF until your machine is polled. If you must use your machine before the polled transmission occurs, you must first cancel this job.

Setup for Polled Transmit with Secure Code (Not available for colour faxes)

When you choose Polled TX:Secure, anyone who polls the machine must enter the polling secure code.

1 If it is not illuminated in green, press



- **2** Load your document. (See *Load documents* on page 2-1.)
- 3 Press Menu/Set, 2, 2, 6.
- **4** Press or to select Secure.

Press Menu/Set.

5 Enter a four-digit number.

Press Menu/Set.

1.Doc 2.Memory

6 Press 1 to leave the documents waiting in the ADF.

-OR-

Press 2 to scan the document into memory.

7 Press 1 if you want to select additional settings. The display returns to the Setup Send menu.

-OR-

Press 2 if you finished selecting settings, and go to Step 8.

8 Press Mono Start.

If you press **2** in Step 6, the document will be stored and can be retrieved from any other fax machine until you delete the fax in memory by using the Cancelling a job function. (See *Cancelling a scheduled job* on page 6-11.)

If you press 1 in Step 6, the document remains in the ADF until your machine is polled. If you must use your machine before the polled transmission occurs, you must first cancel this job.

You can use Secure Polling only with another Brother fax machine.

TX Lock (KEY Lock for some countries)

This feature allows you to prevent unauthorised access to the machine. When switched On, TX Lock prohibits most functions. The following functions listed are available while TX Lock is switched On.

- Receiving faxes
- Answering & making telephone calls with an external telephone
- Scheduled Delayed Transmission*
- Polling*
- Fax Forwarding*
- Remote Retrieval
- * Provided it was set before TX Lock was switched ON.

Using TX Lock (KEY Lock for some countries)

You must use a password to switch TX Lock ON and OFF.

Setting Up the TX Lock for the First Time

1 Press Menu/Set. 2. 0. 1.

1.TX Lock

2 Enter a 4-digit number as a new password.

New Passwd:XXXX

3 Press Menu/Set.

Verify:XXXX

The screen prompts you to re-enter the password.

- 4 Re-enter the password and press Menu/Set.
- **5** Press or to choose Set TX Lock.
- 6 Press Menu/Set. The screen Password: XXXX prompts you to enter the password.
- 7 Enter a 4-digit password, followed by **Menu/Set**. This is the same as the security password of the machine already stored.

The screen displays Accepted for 2 seconds, followed by TX Lock Mode - TX Lock is now switched ON.



If the password you enter at Step 7 is incorrect, the screen would display Wrong Password. After 2 seconds the display will then return to normal (displaying the date & time). You must then switch ON TX Lock again. (See Switching TX Lock ON on page 6-20.)

Changing the TX Lock Password

Press Menu/Set, 2, 0, 1.

1.TX Lock

Press or to choose Set Password.

3 Press Menu/Set.

Old Passwd:XXXX

The screen prompts you to enter the old password.

4 Enter the current password.

5 Press Menu/Set.

New Passwd:XXXX

6 Enter a 4-digit number as a new password.

7 Press Menu/Set.

Verify:XXXX

The screen prompts you to re-enter the new password.

- 8 Enter the new password again and press Menu/Set.
- 9 Press Stop/Exit.

Switching TX Lock ON

Press Menu/Set, 2, 0, 1.

1.TX Lock

2 Press or to choose Set TX Lock.

3 Press Menu/Set. The screen prompts you to enter the password.

Password:XXXX

4 Enter a 4-digit password, followed by Menu/Set. This is the same as the security password of the machine already stored.

The screen displays Accepted for 2 seconds, followed by TX Lock Mode - TX Lock is now switched ON.



If the password you enter at Step 4 is incorrect, the screen would display Wrong Password. After 2 seconds the display will then return to normal (displaying the date & time). You must then start from Step 1 to set TX Lock.

Switching OFF TX Lock

When TX Lock is switched ON, press Menu/Set.

Password: XXXX

2 Enter a 4-digit password and press Menu/Set. The screen displays Accepted, then after 2 seconds the display reverts to normal. TX Lock is now switched OFF.



If the password you enter at Step 2 is incorrect, the screen would display Wrong Password. After 2 seconds the display will then return to displaying TX Lock Mode. You must then start from Step 1 to switch OFF TX Lock.

If you forget the TX Lock password, please contact your Brother dealer or Brother for assistance.

Telephone Service for Australia

Distinctive Ringing (Telstra® FaxStream® Duet®)

This machine feature lets you use the Distinctive Ringing subscriber service offered by Telstra's FaxStream® Duet®, which allows you to have two separate telephone numbers on the one phone line. Each phone number has its own Distinctive Ringing pattern, so you know which phone number is ringing. This is one way you can have a separate phone number for your machine.

Your machine has a Distinctive Ringing function, allowing you to dedicate one phone number just for receiving faxes.

Flowchart Sequence of Incoming call



After you have set the Distinctive Ring feature to On, the receive mode is set to Manual automatically. Unless you have a TAD or Voice Mail set up on the Distinctive Ring number, Manual mode means you must answer all the calls yourself. You can not change the receive mode to the other mode while the Distinctive Ring is set to on.

Incoming Call (either Voice or Fax) All extension phones ring, fax machine is silent. Registered Duet (Fax) Number Main number (Voice Number) Fax machine automatically Fax machine begins receives and prints fax ringing on third ring. message without ringing. Telephone Answering You answer the call at an external phone Device (TAD)

or an extension phone.

answers the call.

Set the Distinctive Ringing to ON

Press Menu/Set. 2. 0. 2.

2.Distinctive

The screen displays the current setting of this feature.

- Press or to select on (or off).
- 3 Press Menu/Set.
- 4 Press Stop/Exit.

Caller ID (Caller IDentification)

Caller ID is a telephone service that allows the subscriber to see a display of the caller's phone number or name as the telephone rings. It is a fast way to screen your calls. You can respond guickly to calls you missed, because Caller IDs are received and stored in your machine memory.



To get the Caller ID Service: apply for the Caller ID service at your local telephone company, if available.

Advantages of Caller ID

For Business

All businesses profit from a quicker response to customer calls. Businesses that provide mail order services, money-lending services or provide confidential information, can protect themselves from false orders or acceptance of false identification.

At Home

Residential customers can protect themselves from unwanted calls.

How Does the Caller ID Work?

The Caller ID Appears on the Display When Your Telephone Rings

As your telephone rings, the display shows you the caller's phone number or name. Once you pick up the handset, the caller's ID disappears. You will see up to the first 16 characters of the number on the display.



- If Out of Area appears on the display, it means that the call came from outside your caller ID service area or a public phone. *
- If Private Call appears on the display, it means the caller intentionally blocked the transmission of his/her ID. *

The Caller ID is Stored in Your Machine Memory

The machine can store a maximum of the last 30 incoming caller IDs in the memory, along with the time and date of reception. The 31st call will cause the oldest ID to be erased.

The Caller ID information stored in the memory can be used for the following.

- Selecting a Caller ID from the Memory for Call Reply.
 You can scroll through the Caller IDs on the display and select one for your machine to dial.
- Printing the Caller ID List.

You can review calls you received by checking the Caller IDs in memory. This report will list the Date, Time, Phone Number (Caller ID), and type of Call (Comment).

^{*} Depends on network Function.

Viewing Caller ID List

Caller ID memory stores information for up to thirty calls; when the thirty-first call comes in, information about the first call is erased. You can scroll through Caller ID information to review those calls made to your machine.

1 Press Menu/Set, 2, 0, 3.

3.Caller ID

2 Press or to select Display# and press Menu/Set.

If the name was not received, it will not be displayed.

- 3 Press or to scroll through the Caller ID memory to select the Caller ID you want to view and press Menu/Set.
 The next screen shows the caller's telephone number and the date and time of the call.
- 4 Press or to return to the Caller ID listing.

-OR-

Press Stop/Exit.

Printing Caller ID List

- 1 Press Menu/Set, 2, 0, 3.
- **2** Press or to select Print Report.
- 3 Press Menu/Set.
- 4 Press Mono Start.

Telephone Service for New Zealand

FaxAbility

FaxAbility is a service offered by Telecom that allows you to have an additional number on one phone line, with its own distinctive ring pattern. This way, when you get an incoming call, you can identify the number being called by its ring.

How Will the Fax Machine Treat All Other Numbers?


FaxAbility mode ensures that the machine will answer calls to the FaxAbility (secondary) number. When a call comes in to your main number, all the phones will ring. You can set an external answering device (TAD) to answer calls on the other number(s). (See the chart in the following page.)

What is the Advantage of Using the FaxAbility Function?

Using FaxAbility is the most efficient way to receive both fax and telephone calls on the same line. It is much easier for your callers who dial manually. The fax machine will answer with receiving tones so they will not have to press an activation code. And the people who call to talk on your main number will not have to talk to your fax machine. Basically, it gives you two independent numbers without the higher cost of a second line.

How Does FaxAbility Work?

Your telephone number will have the standard ring pattern of long, long tone, while the new number will have a ring pattern of long, silence, long, etc. When FaxAbility is On, you will not hear the first ring of all incoming calls on the fax machine. Extension phones will ring as usual. If the fax machine recognizes the ring pattern, all ringing will stop and the fax machine will answer and automatically receive the fax message. Otherwise, you will hear the extension phones and the fax machine continue to ring. The fax machine always listens to the ring pattern before it answers, so do not pick up the phone during that time. You will quickly learn to recognize the ring pattern for faxes, so you will not be tempted to answer that number. Either you or a telephone answering device can answer the main number(s).

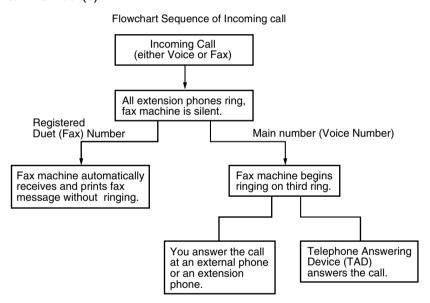

After you have set the FaxAbility feature to On, the receive mode is set to Manual automatically. Unless you have a TAD or Voice Mail set up on the FaxAbility number, Manual mode means you must answer all the call yourself. You can not change the receive mode to the other mode while the FaxAbility is set to on.

How to Turn FaxAbility OFF or ON

The FaxAbility function is designed to accommodate the FaxAbility service provided by Telecom. To change the setting, repeat Steps 1-3; Step 2 is where you can select either On or Off.

Call Waiting beeps caused by incoming calls on your main number can affect fax transmissions. If you have FaxAbility Service but don't have Call Waiting, you need do nothing at this stage. If you do have Call Waiting as well as FaxAbility, set the Call Waiting menu option to On. See below.

1 Press Menu/Set, 2, 0, 2.

2.Faxability

The screen displays

- **2** Press or to set FaxAbility to on or off. If you have FaxAbility service, select on.
- 3 Press Menu/Set.
- 4 Press or to set Call Waiting to on or off. If you have Call Waiting service, select on to avoid the trouble caused by Call Waiting.
- 5 Press Menu/Set.
- 6 Press Stop/Exit.

Caller ID (Caller IDentification)

Caller ID is a telephone service that allows the subscriber to see a display of the caller's phone number as the telephone rings. It is a fast way to screen your calls. You can respond quickly to calls you missed, because Caller IDs are received and stored in your machine memory.



To get the Caller ID Service: apply for the Caller ID service at your local telephone company, if available.

Advantages of Caller ID

For Business

All businesses profit from a guicker response to customer calls. Businesses that provide mail order services, money-lending services or provide confidential information, can protect themselves from false orders or acceptance of false identification.

At Home

Residential customers can protect themselves from unwanted calls.

How Does the Caller ID Work?

The Caller ID Appears on the Display When Your **Telephone Rings**

As your telephone rings, the display shows you the caller's phone number. Once you pick up the handset, the caller's ID disappears. You will see up to the first 16 characters of the number on the display.



- If Out of Area appears on the display, it means that the call came from outside your caller ID service area. *
- If Private Call appears on the display, it means the caller intentionally blocked the transmission of his/her ID. *

^{*} Depends on network Function.

Viewing Caller ID List

Caller ID memory stores information for up to thirty calls; when the thirty-first call comes in, information about the first call is erased. You can scroll through Caller ID information to review those calls made to vour machine.

1 Press Menu/Set, 2, 0, 3.

3.Caller ID

2 Press or to select Display# and press Menu/Set.

If the name was not received, it will not be displayed.

3 Press or to scroll through the Caller ID memory to select the Caller ID you want to view and press Menu/Set. The next screen shows the caller's telephone number and the date and time of the call.

4 Press or to return to the Caller ID listing.

-OR-

Press Stop/Exit.

Printing Caller ID List

- Press Menu/Set. 2. 0. 3.
- Press or to select Print Report.
- Press Menu/Set.
- Press Mono Start.



If you use the Caller ID for Dial back...

- Please be sure that you use appropriate dialling procedures for local and national call.
- Please be sure that you make sure of the details of the exact number to be called back, and the need to insert prefix(es) for manual dialling.
- Please understand that your machine may not display precisely the digits to be called.

Telephone Service for Some Countries

Distinctive Ringing (For Singapore and Hong Kong)

This machine feature lets you use the Distinctive Ringing subscriber service offered by some telephone companies, which allows you to have several telephone numbers on one phone line. Each phone number has its own Distinctive Ringing pattern, so you'll know which phone number is ringing. This is one way you can have a separate phone number for your machine.

Your machine has a Distinctive Ringing function, allowing you to dedicate one phone number just for receiving faxes. You'll need to set Distinctive Ringing to on.



You can switch it off temporarily, then turn it back on. When you get a new fax number, make sure you reset this function.

■ The machine will answer only calls to the Distinctive Ringing number.



After you have set the Distinctive Ring feature to on, the receive mode is set to Manual automatically. Unless you have a TAD or Voice Mail set up on the Distinctive Ring number, Manual mode means you must answer all the call yourself. You can not change the receive mode to the other mode while the Distinctive Ring is set to on.

Setting the Distinctive Ringing

Press Menu/Set. 2, 0, 2.

2.Distinctive

- 2 Press or to select on (or off).
- 3 Press Menu/Set.
- 4 Press Stop/Exit.

Caller ID (For Singapore and Hong Kong)

The Caller ID feature of this machine lets you use the Caller ID subscriber service offered by many local phone companies. This service provides you, by means of the screen display, the telephone number (or name) of your caller as the line rings. (See Printing Caller ID List on page 6-33.)

After a few rings, the screen displays the telephone number of your caller (or name, if available). Once you pick up the handset, the Caller ID information disappears from the screen, but the call information remains stored in the Caller ID memory.

- You will see the first 16 characters of the number or name.
- Out of Area display means call originates outside your Caller ID service area.
- Private Call display means the caller has intentionally blocked transmission of information.



If both the name and number are received, the screen displays only the name. You can print a list of Caller ID information received by your machine.

Caller ID service varies with different carriers. Call your local phone company to determine the kind of service available in your area.

Viewing Caller ID List

Caller ID memory stores information for up to thirty calls; when the thirty-first call comes in, information about the first call is erased. You can scroll through Caller ID information to review those calls made to your machine.

4	_			_	_	_
- 11	Droo	NAOD	いんじつも	•	n	•2
	F1855	IVICI	W.SEI	_	.,	. 7
-	Press		u , u u ,	_,	ͺ,	•

3.Caller ID

2 Press or to select Display#? and press Menu/Set.

If the name was not received, it will not be displayed.

- 3 Press or to scroll through the Caller ID memory to select the Caller ID you want to view and press Menu/Set.
 The next screen shows the caller's telephone number and the date and time of the call.
- 4 Press or to return to the Caller ID listing.

-OR-

Press Stop/Exit.

Printing Caller ID List

- 1 Press Menu/Set, 2, 0, 3.
- 2 Press or to select Print Report? and press Menu/Set.
- 3 Press Mono Start.

Quick-Dial numbers and dialling options

Storing numbers for easy dialling


You can set up your machine to do three types of easy dialling: One-Touch, Speed-Dial and Groups for Broadcasting faxes.



If you lose electrical power, the quick-dial numbers that are in the memory will not be lost.

Storing One-Touch Dial numbers

Your machine has 5 One-Touch keys where you can store 10 fax or phone numbers for automatic dialling. To access numbers 6 to 10, hold down **Shift** as you press the One-Touch key. When you press a One-Touch key the LCD shows the name, if you stored it, or the number. (See *One-Touch dialling* on page 6-2.) One-Touch keys are the 5 keys (numbers 01–10)



1 Press Menu/Set, 2, 3, 1.

the screen.

- 1.One-Touch Dial
- Press the One-Touch key where you want to store a number.

located on the left side of the control panel.

- 3 Enter a number (up to 20 digits). Press Menu/Set
 - If you want to enter a pause in the dialling sequence (for example, to access an outside line), press Redial/Pause as you are entering the digits. Each key press of **Redial/Pause** enters a 3.5 second pause when the number is dialled, and a dash appears on

4 Use the dial pad to enter the name (up to 15 characters).

Press Menu/Set.

(You can use the chart on page 4-3 to help you enter letters.)

-OR-

Press Menu/Set to store the number without a name.

5 Go to Step 2 to store another One-Touch number.

-OR-

Press Stop/Exit.

When you dial a quick-dial number, the LCD shows the name you've stored, or, if you haven't stored a name, the number will be shown.

Storing Speed-Dial numbers

You can store Speed-Dial numbers, so that when you dial you will only have to press a few keys (**Search/Speed Dial**, #, the two-digit number, and **Mono Start** or **Colour Start**). The machine can store 40 Speed-Dial numbers.

1 Press Menu/Set, 2, 3, 2.

2.Speed-Dial

2 Use the dial pad to enter a two-digit Speed-Dial location number (01-40).

(For example, press **05**.)

Press Menu/Set.

3 Enter the phone or fax number (up to 20 digits).

Press Menu/Set.

4 Use the dial pad to enter the name (up to 15 characters).

Press Menu/Set.

(You can use the chart on page 4-3 to help you enter letters.)

-OR-

Press Menu/Set to store the number without a name.

5 Go to Step 2 to store another Speed-Dial number.

-OR-

Press Stop/Exit.

Changing One-Touch and Speed-Dial numbers

If you try to store a One-Touch or Speed-Dial number where a number has already been stored, the LCD will show the name that has been stored there (or number) and will ask you to do one of the following:

1 Press 1 to change the stored number.

1.Change 2.Exit

—OR—

Press 2 to exit without making a change.

How to change the stored number:

- If you want to erase the whole number or whole name, press Stop/Exit when the cursor is under the first the digits or letters. The characters above and to the right of the cursor will be deleted.
- If you want to change a character, use

 or

 to position the cursor under the character you want to change, and then type over it.
- 2 Enter a new number.

Press Menu/Set.

Follow the directions beginning at Step 4 in Storing One-Touch Dial numbers and Storing Speed-Dial numbers. (See Storing One-Touch Dial numbers on page 7-1 and Storing Speed-Dial numbers on page 7-2.)

Setting up Groups for Broadcasting

Groups, which can be stored on a One-Touch key or a Speed-Dial location, allow you to send the same fax message to many fax numbers by pressing only a One-Touch key and **Mono Start** or **Search/Speed Dial**, #, the two-digit location and **Mono Start**.

First, you'll need to store each fax number as a One-Touch or Speed-Dial number. Then, you can combine them into a Group, *Each Group uses up a One-Touch key or a Speed-Dial location.* Finally, you can have up to six small Groups, or you can assign up to 49 numbers to one large Group.

(See Storing Speed-Dial numbers on page 7-2 and Changing One-Touch and Speed-Dial numbers on page 7-3.)

1 Press Menu/Set, 2, 3, 3.

3.Setup Groups

2 Decide where you wish to store the Group.

-AND-

Press a One-Touch key.

-OR-

Press **Search/Speed Dial** and enter the two-digit location, and then press **Menu/Set**.

3 Use the dial pad to enter the Group number.

Setup Group:G0

Press Menu/Set.


(For example, press 1 for Group 1.)

- 4 To include One-Touch or Speed-Dial numbers in the Group, enter them as if you were dialling.
 - For example, for One-Touch key **05**, press One-Touch key **05**. For Speed-Dial location 09, press Search/Speed Dial, then press **09** on the dial pad. The LCD shows \pm 05, \pm 09.
- **5** Press **Menu/Set** to accept the numbers for this Group.
- 6 Use the dial pad and the chart on page 4-3 to enter a name for the Group.

Press Menu/Set.

(For example, NEW CLIENTS)

7 Press Stop/Exit.



You can print a list of all One-Touch and Speed-Dial numbers. (See Printing reports on page 9-3.) Group numbers will be marked in the GROUP column.

Dialling options

Access codes and credit card numbers

Sometimes you may want to choose from several long distance carriers when you make a call. Rates may vary depending on the time and destination. To take advantage of low rates, you can store the access codes or long-distance carriers and credit card numbers as One-Touch and Speed-Dial numbers. You can store these long dialling sequences by dividing them and setting them up on separate keys in any combination. You can even include manual dialling using the dial pad.

The combined number will be dialled in the order that you entered it as soon as you press Mono Start or Colour Start. (See Storing One-Touch Dial numbers on page 7-1.)

For example, you can store '555' on One-Touch key 03 and '7000' on One-Touch key 02. If you press One-Touch key 03, One-Touch kev 02. and Mono Start or Colour Start, you will dial '555-7000'.

To temporarily change a number, you can substitute part of the number with manual dialling using the dial pad.

For example, to change the number to 555-7001 you could press One-Touch key **03** and then press **7001** using the dialling pad.



If you must wait for another dial tone or signal at any point in the dialling sequence, store a pause there in the number by pressing Redial/Pause. Each key press adds a 3.5-second delay.

Pause

Press **Redial/Pause** to insert a 3.5-second pause between numbers. If you are dialling overseas, you can press Redial/Pause as many times as needed to increase the length of the pause.

Fax Redial

If you're sending a fax manually and the line is busy, press **Redial/Pause** to try again. Any time you want to make a second call to the last number dialled, press **Redial/Pause** to save time.

If you're sending a fax automatically and the line is busy, the machine will automatically redial one time five minutes after the transmission.

Tone or Pulse (Not available in New Zealand)

If you have a Pulse dialling service, but need to send Tone signals (for example, for telephone banking), follow the instructions below. If you have Touch Tone service, you will not need this feature to send tone signals.

- 1 If you have the FAX-1820C, lift the handset.
 - --OR---
 - If you have the MFC-3220C, lift the handset of the external phone.
- Press #. Any digits dialled after this will send tone signals.
- When you hang up, the machine will return to the Pulse dialling service.

Telephone (voice) operation (FAX-1820C only)

You can use the machine to make voice telephone calls by dialling manually or by using Search, One-Touch Dial or Speed-Dial memory. You can use the handset to make and receive calls.

When you dial a guick-dial number, the LCD shows the name you've stored, or if you haven't stored a name, the fax number you've stored.

How to dial



There are four ways to dial. (See How to dial on page 6-1.)

Making a telephone call

- 1 Pick up the handset.
 - -OR-

Press Hook.

2 When you hear a dial tone, dial the call using the dial pad, One-Touch, Speed-Dial and Search. (See How to dial on page 6-1.)



If you pressed **Hook** to dial, pick up the handset when the other person answers. (The speaker works only one way. The other person won't be able to hear you unless you pick up the handset.)

3 To hang up, replace the handset.

Hold (FAX-1820C only)

- Press Hold to put a call on Hold.
- You can put down the handset without disconnecting the call. Pick up the machine handset to release the call from Hold. Picking up an extension handset will not release the call from Hold.

Remote Fax Options

Fax Forwarding



After you have selected Fax Forwarding, Fax Storage is set to On automatically. If you bring the Fax Forwarding feature back to Off. Fax Storage stays on.

Programming a Fax Forwarding number

When Fax Forwarding is set to On, your machine stores the received fax in the memory. Then it dials the fax number you've programmed and forwards the fax message.

Press Menu/Set, 2, 5, 1.

1.Fax Forward

2 Press or to select on (or off).

Press Menu/Set.

The LCD will ask you to enter the fax number to which faxes will be forwarded.

- 3 Enter the forwarding number (up to 20 digits).
 - Press Menu/Set.
- 4 Press Stop/Exit.


Setting Fax Storage


If you set Fax Storage to ON, you will be able to retrieve fax messages from another location using Fax Forwarding or Remote Retrieval operations. (See *Remote commands* on page 8-5.) If there is paper in your machine, a back-up copy of each fax will be printed. The LCD will show when you have a fax stored in memory.

1 Press Menu/Set, 2, 5, 2. The LCD will ask you to choose a fax setting.

2.Fax Storage

- **2** Press or to select on (or off). Press Menu/Set.
- 3 Press Stop/Exit.





If you press 1, all fax data is erased and Fax Storage is turned off. If you press 2, faxes are not erased and Fax Storage stays on. (See Printing a fax from the memory on page 5-8.)



After you have selected the Fax Forwarding feature, Fax Storage is set to On automatically. If you turn the Fax Forwarding feature back to Off, Fax Storage stays on.

Backup Print

If you've set Fax Storage to On, your machine automatically prints faxes as they are received into the memory.

This is a safety feature in case the power goes off so you won't lose your messages.

Setting your Remote Access Code


The remote access code lets you access the Remote Retrieval features when you are away from your machine. Before you use the remote access and retrieval features, you have to set up your own code. The default code is inactive code (--- \times).

Press Menu/Set, 2, 5, 3.

3.Remote Access

2 Enter a three-digit code using numbers 0-9. \star or #.

Press **Menu/Set**. (The preset '* cannot be changed.)



3 Press Stop/Exit.



You can change your code at any time by entering a new one. If you want to make your code inactive, press Stop/Exit in Step 2 to restore the inactive setting $(--- \times)$.

Remote Retrieval

You can call your machine from any touch tone telephone or fax machine, then use the Remote Access Code and remote commands to retrieve fax messages. Be sure to cut out the Remote Retrieval Access Card on the last page and keep it with you at all times.

Using your Remote Access Code

- Dial your fax number from a telephone or another fax machine using touch tone.
- 2 When your machine answers, immediately enter your Remote Access Code (3 digits followed by \times).
- The machine signals if it has received fax messages:
 - 1 long beep Fax messages
 - No beeps No messages
- 4 The machine gives two short beeps, which tells you to enter a command. The machine will hang up if you wait longer than 30 seconds to enter a command. The machine will beep three times, if you enter an invalid command.
- 5 Press 90 to reset the machine when you've finished.
- Hang up.



If your machine is set to Manual mode and you want to use the remote retrieval features, you can access your machine by waiting about 2 minutes after it starts ringing, and then entering the Remote Access Code within 30 seconds.

Remote commands

Follow the commands below to access features when you are away from the machine. When you call the machine and enter your Remote Access Code (3 digits followed by *), the system will give two short beeps and you must enter a remote command.

Remote commands		Operation details	
95	Change the Fax Forwarding settings		
	1 OFF	If you hear one long beep, the change has	
	2 Fax Forwarding	been accepted. If you hear three short beeps, you cannot change it because the conditions	
	4 Fax Forwarding number	have not been met. You can register your Fax Forwarding number by entering 4. (See Changing your Fax Forwarding number on page 8-6.) Once you have registered the number, Fax Forwarding will be set to On.	
	6 Fax Storage ON	You can turn Fax Storage to On (or Off	
	7 Fax Storage OFF	after you have retrieved or erased all your messages).	
96	Retrieve a fax		
	2 Retrieve all faxes	Enter the number of a remote fax machine receive stored fax message(s). (See page 8-6.)	
	3 Erase faxes from the memory	If you hear one long beep, you can erase fax messages from the memory.	
97	Check the receiving status		
	1 Fax	You can check whether your machine has received any faxes. If yes, you will hear one long beep. If no, you will hear three short beeps.	
98	Change the Receive Mode		
	1 External TAD	If you hear one long beep, you can change	
	2 Fax/Tel	the Receive Mode.	
	3 Fax Only		
90	Exit	After a long beep, you can exit Remote Retrieval.	

Retrieving fax messages

- **1** Dial your fax number.
- When your machine answers, immediately enter your Remote Access Code (3 digits followed by *). If you hear one long beep, you have messages.
- 3 As soon as you hear two short beeps, use the dial pad to press 962
- 4 Wait for the long beep, and then use the dial pad to enter the number of the remote fax machine where you want your fax messages sent to followed by ## (up to 20 digits).
- You cannot use * and # as dial numbers. However, press # if you want to store a pause.
- **5** Hang up after you hear your machine beep. Your machine will call the other machine, which will then print your fax messages.

Changing your Fax Forwarding number

You can change the default setting of your fax forwarding number from another telephone or fax machine using Touch Tone.

- **1** Dial your fax number.
- When your machine answers, immediately enter your Remote Access Code (3 digits followed by *). If you hear one long beep, you have messages.
- 3 When you hear two short beeps, use the dial pad to press 954.
- 4 Wait for the long beep, and then use the dial pad to enter the new number of the remote fax machine where you want your fax messages forwarded followed by ## (up to 20 digits).
- You cannot use * and # as dial numbers. However, press # if you want to store a pause.
- **5** Hang up after you hear your machine beep.

Printing reports

Machine settings and activity

You need to set up the Transmission Verification Report and Journal Period in the menu table.

Press Menu/Set, 2, 4, 1.

.XMIT Report

-OR-

Press Menu/Set. 2. 4. 2.

2.Journal Period

Customizing the Transmission Verification Report

You can use the Transmission Report as proof that you sent a fax. This report lists the time and date of transmission and whether the transmission was successful (OK). If you select On or On+Image, the report will print for every fax you send.

If you send a lot of faxes to the same place, you may need more than the job numbers to know which faxes you must send again. Selecting On+Image or Off+Image will print a section of the fax's first page on the report to help you remember.



When the Verification Report is turned Off, the Report will only print it there is a transmission error, and in the RESULT column it will show NG.

1 Press Menu/Set, 2, 4, 1.

1.XMIT Report

2 Press or to select off, Off+Image, On or On+Image.

Press Menu/Set.

3 Press Stop/Exit.

Setting the Journal Period

You can set the machine to print a journal at specific intervals (every 50 faxes, 6, 12 or 24 hours, 2 or 7 days). If you set the interval to Off, you can print the report by following the Steps on the next page. The default setting is Every 50 Faxes.

1 Press Menu/Set, 2, 4, 2.

2.Journal Period

2 Press or to choose an interval.

Press Menu/Set.


(If you choose 7 days, the LCD will ask you to choose a day on which to begin the 7-day countdown.)

3 Enter the time to begin printing in 24-hour format.

Press Menu/Set.

(For example: enter 19:45 for 7:45 PM.)

4 Press Stop/Exit.

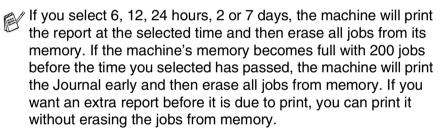

If you select Every 50 Faxes, the machine will print the Journal when the machine has stored 50 jobs.

Printing reports

Five reports are available:

1.Help List Prints the Help List so you can see at-a-glance

how to quickly program your machine.

2.Quick-Dial Lists names and numbers stored in the

One-Touch and Speed-Dial memory, in numerical

order.

3. Fax Journal Lists information about the last incoming and

outgoing faxes.

(TX means Transmit.) (RX means Receive.)

4.XMIT Verify Prints a Transmission Verification Report for your

last transmission.

5. User Settings Lists your settings.

To print a report

1 For FAX-1820C, press Ink/Reports key with Shift key. For MFC-3220C, press Menu/Set, 5.

2 Press or to select the report you want.

Press Menu/Set.

-OR-

Enter the number of the report you want to print.

For example, press 1 to print the Help List.

3 Press Mono Start


Using the machine as a copier


You can use your machine as a copier, making up to 99 copies at a time.

Enter Copy mode

Before making copies, make sure that (Copy) is illuminated

in green. If it is not, press (Copy) to enter Copy mode. The default setting is Fax. You can change the number of seconds or minutes that the machine stays in Copy mode. (See Setting the Mode Timer (MFC-3220C only) on page 4-5 and Setting the Mode Timer (FAX-1820C only) on page 4-5.)

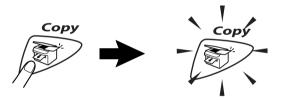

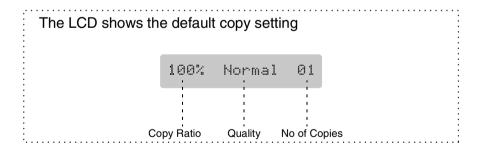

Making a single copy

- 1 Press (Copy) to illuminate it in green.
- 2 Load your document. (See Load documents on page 2-1.)
- 3 Press Mono Start or Colour Start.
- To stop copying, press **Stop/Exit**.

Making multiple copies

- 1 Press (Copy) to illuminate it in green.
- 2 Load your document. (See Load documents on page 2-1.)
- 3 Use the dial pad to enter the number of copies you want (up to 99).
- 4 Press Mono Start or Colour Start.
- To sort the copies, press the **Options** key. (See *Using the Copy keys (Temporary settings)* on page 10-4.)

Out of Memory message

If the memory becomes full while you are making copies, the LCD message will guide you through the next step.

Out of Memory

If the Out of Memory message appears, press Stop/Exit to cancel or Mono Start or Colour Start to copy scanned pages. You will need to clear some jobs from the memory before you can continue.



To gain extra memory, you can turn off Fax Storage. (See Setting Fax Storage on page 8-2.)

-OR-


Print the faxes that are in the memory. (See Printing a fax from the memory on page 5-8.)

When you get an Out of Memory message, you may be able to make copies if you first print incoming faxes in the memory to restore the memory to 100%.

Using the Copy keys (Temporary settings)

When you want to change the settings only for the next copy, use the Temporary Copy keys. You can use different combinations.

These settings are temporary, and the machine returns to its default settings 60 seconds after it finishes copying. If you want to use these temporary settings again, place the next document in the ADF within that time. However, if you have set the Mode Timer for copy and Scan (Only for MFC-3220C) modes to 0 or 30 seconds, the machine returns to the default settings after the number of seconds that has been set for mode timer. (See Setting the Mode Timer (MFC-3220C only) on page 4-5 or Setting the Mode Timer (FAX-1820C only) on page 4-5.)

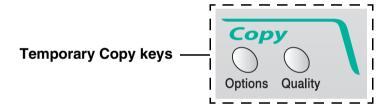

Quality

You can select the copy quality. The default setting is Normal.

Press Quality	Normal	Recommended mode for ordinary printouts. Good copy quality with adequate copy speed.
Quality and or	Fast	Fast copy speed and lowest ink consumption. Use FAST to save time (document to be proof-read, large documents or many copies).
	Best	Use this mode to copy precise images such as photographs. BEST uses the highest resolution and slowest speed.

- 1 Press (Copy) to illuminate it in green.
- 2 Load your document. (See Load documents on page 2-1.)
- **3** Use the dial pad to enter the number of copies you want (up to 99).
- 4 Press Quality.
- Fress or to choose the copy quality (Fast, Normal or Best). Press Menu/Set.
- 6 Press Mono Start or Colour Start.
 - -OR-

Press other Temporary Copy keys for more settings.

Options

Use the **Options** key to set the following copy settings only for the next copy.

Press Copy Options	Menu Selections +	Options +	Factory Setting	Page
Options	Enlarge/Reduce	50%/ 69%:A4→A5/ 83%:LGL→A4/ 97%:LTR→A4/ 100%/ 142%:A5→A4/ 198%:10×15cm→A4/ 200%/ Custom(25-400%)	100%	10-7
	Paper Type	Plain/Inkjet/ Glossy (4-Color or 3-Color)/ Transparency	Plain	10-9
	Paper Size	A4/A5/ 10(W)x15(H)cm	A4	10-10
	Brightness	+	- 00 8 00 +	10-11
	Contrast	- 00 - 00 +	- 00 8 00 +	10-12
	Stack/Sort	Stack/Sort	Stack	10-13
	Page Layout	Off(1 in 1)/ 2 in 1/4 in 1 (P)/ 4 in 1 (L)	Off (1 in 1)	10-14
	No. of Copies	No. of Copies:01 (01-99)	01	

After you finish choosing settings using the **Options** key, the LCD shows Press Start and then returns to Menu selections.

Press **Mono Start** or **Colour Start** if you're finished choosing settings.

-OR-

Press or to select more settings.

Enlarge/Reduce

You can select the following enlargement or reduction ratios. Custom allows you to enter a ratio from 25% to 400%.

Press Options	100%	
	142%:A5→A4	
Options and or to select Enlarge/Reduce	198%:10×15cm→A4	
	200%	
	Custom(25-400%)	
	97%:LTR→A4	
	83%:LGL→A4	
	69%:A4→A5	
	50%	

- 1 Press (Copy) to illuminate it in green.
- **2** Load your document. (See *Load documents* on page 2-1.)
- **3** Use the dial pad to enter the number of copies you want (up to 99).
- **4** Press Options and or to select Enlarge/Reduce. Press Menu/Set.

5 Press or to select the enlargement or reduction ratio you want. Press **Menu/Set**.

-OR-

You can select Custom and press Menu/Set.

Use the dial pad to enter an enlargement or reduction ratio from 25% to 400%.

Press Menu/Set.

(For example, press 5 3 to enter 53%.)

6 Press Mono Start or Colour Start.

-OR-

Press or for more settings.

Special Copy Options (2 in 1 or 4 in 1) are not available with Enlarge/Reduce.

Paper Type


You can change the paper type only for the next copy. Select the type of media that you are using to get the best print quality.

- 1 Press (Copy) to illuminate it in green.
- **2** Load your document. (See *Load documents* on page 2-1.)
- **3** Use the dial pad to enter the number of copies you want (up to 99).
- **4** Press **Options** and or to select Paper Type. Press **Menu/Set**.
- Press or to select the type of paper you are using (Plain, Inkjet, Glossy or Transparency).
 Press Menu/Set.
- 6 If you selected Glossy, press or to select Glossy: 4-Color or Glossy: 3-Color.

 Press Menu/Set
- The print quality of black ink depends on the type of glossy paper you are using. Black ink is used when you select Glossy: 4-Color. If the glossy paper you are using repels the black ink, select Glossy: 3-Color, which simulates black ink by combining the three ink colours.
- 7 Press Colour Start or Mono Start.
 - **—OR**—
 Press ♠ or ✔ for more settings.
- You can change the default Paper Type setting at any time. (See Setting the Paper Type on page 4-6.)

Paper Size

You can change the paper size setting only for the next copy.



- 1 Press (Copy) to illuminate it in green.
- **2** Load your document. (See *Load documents* on page 2-1.)
- **3** Use the dial pad to enter the number of copies you want (up to 99).
- 4 Press Options and or to select Paper Size. Press Menu/Set.
- **5** Press or to select the size of paper you are using (A4, A5 or 10 (W) x15 (H) cm).

Press Menu/Set.

6 Press Mono Start or Colour Start.

-OR-

Brightness

You can adjust the copy brightness to make copies darker or lighter.

- 1 Press (Copy) to illuminate it in green.
- **2** Load your document. (See *Load documents* on page 2-1.)
- **3** Use the dial pad to enter the number of copies you want (up to 99).
- 4 Press Options and or to select Brightness.

 Press Menu/Set. -□□■□□+

♦]

Press to make a lighter copy.—OR—

Press to make a darker copy.

Press Menu/Set.

- 6 Press Mono Start or Colour Start.
 - -OR-

Contrast

You can adjust the copy contrast to help an image look sharper and more vivid.

- 1 Press (Copy) to illuminate it in green.
- **2** Load your document. (See *Load documents* on page 2-1.)
- **3** Use the dial pad to enter the number of copies you want (up to 99).
- **5** Press to increase the contrast.

-OR-

Press to decrease the contrast.

Press Menu/Set.

- 6 Press Mono Start or Colour Start.
 - -OR-


Sorting copies


You can sort multiple copies. Pages will be stacked in the order 123, 123, 123, and so on.

- 1 Press (Copy) to illuminate it in green.
- **2** Load your document. (See *Load documents* on page 2-1.)
- **3** Use the dial pad to enter the number of copies you want (up to 99).
- **4** Press **Options** and **o** or **to** select Stack/Sort. Press **Menu/Set**.
- **5** Press or to select Sort. Press **Menu/Set**.
- 6 Press Mono Start or Colour Start.
 - —OR—

N in 1 copy (Page Layout)

- 1 You can save paper by copying either two or four pages onto one page. Press (Copy) to illuminate it in green.
- **2** Load your document. (See *Load documents* on page 2-1.)
- **3** Use the dial pad to enter the number of copies you want (up to 99).
- 4 Press Options and or to select Page Layout. Press Menu/Set.
- Fress or to select 2 in 1, 4 in 1 (P), 4 in 1 (L), (or Off(1 in 1)).
 Press Menu/Set.
- 6 Press Mono Start or Colour Start to scan the document.
- (\mathbb{P}) means Portrait and (\mathbb{L}) means Landscape.
- For 2 in 1, 4 in 1 (P) or 4 in 1 (L), you cannot use the Enlarge/Reduce setting.

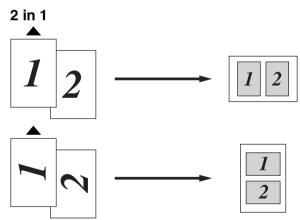

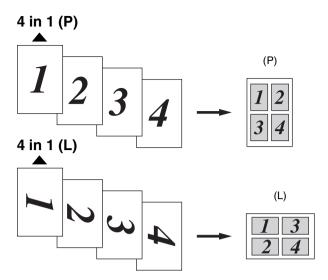

If 2 in 1 or 4 in 1 copies are in colour, you must use A4 paper.

If you selected Glossy in the Paper Type setting, 2 in 1 and 4 in 1 copies are not available.

2 in 1 or 4 in 1 copies in colour are not available with Multiple Copies.

Changing the default copy settings

You can change the default copy settings. These settings will stay until you change them again.

Copy Quality

1 Press Menu/Set, 3, 1.

1.Quality

2 Press or to select Normal, Best or Fast.

Press Menu/Set.

3 Press Stop/Exit.

Brightness

1 Press Menu/Set, 3, 2.

2.Brightness

2 Press to make a lighter copy.

-OR-

Press to make a darker copy.

Press Menu/Set.

3 Press Stop/Exit.

Contrast

You can change the contrast to help an image look sharper and more vivid.

1 Press Menu/Set, 3, 3.

3.Contrast

2 Press to increase the contrast.

-OR-

Press to decrease the contrast.

Press Menu/Set.

3 Press Stop/Exit.

Colour Adjustment

1 Press **Menu/Set**, **3**, **4**.

4.Color Adjust

2 Press or to select Red, Green or Blue.

Press Menu/Set.

3 Press to increase the colour saturation.

-OR-

Press to decrease the colour saturation.

Press Menu/Set.

4 Return to Step 2 to select the next colour.

-OR-

Press Stop/Exit.

Legal limitations

Colour reproductions of certain documents are illegal and may result in either criminal or civil liability. This memorandum is intended to be a guide rather than a complete listing of every possible prohibition. In case of doubt, we suggest that you check with relevant authorities as to any particular questionable documents.

The following are examples of documents which should not be copied:

- Money
- Bonds or other certificates of indebtedness
- Certificates of Deposit
- Armed Forces Service or Draft papers.
- Passports
- Postage Stamps (cancelled or uncancelled)
- Immigration Papers
- Welfare documents
- Cheques or Drafts drawn by Governmental Agencies
- Identification Documents, badges or insignias
- Licences and Certificates of Title to motor vehicles

Copyrighted works cannot be copied. Sections of a copyrighted work can be copied for 'fair use'. Multiple copies would indicate improper use.

Works of art should be considered the equivalent of copyrighted works.

Important Information for Australia IMPORTANT-For Your Safety.

To ensure safe operation the three-pin plug supplied must be inserted only into a standard three-pin power point which is effectively grounded through the normal household wiring.

Extension cords used with the equipment must be three-conductor and be correctly wired to provide connection to ground. Incorrectly wired extension cords are a major cause of fatalities.

The fact that the equipment operates satisfactorily does not imply that the power is grounded and that the installation is completely safe. For your safety, if in any doubt about the effective grounding of the power, consult a qualified electrician.

Disconnect device

This machine must be installed near a power outlet, which is easily accessible. In case of emergencies, you must disconnect the power cord from the power outlet in order to shut off power completely.

International Energy Star® Compliance Statement

The purpose of the International ENERGY STAR® Program is to promote the development and popularization of energy-efficient office equipment.

As an Energy Star® Partner, Brother Industries, Ltd. has determined that this product meets the Energy Star® guidelines for energy efficiency.



Important safety instructions

- 1 Read all of these instructions.
- Save them for later reference.
- Follow all warnings and instructions marked on the product.
- Unplug this product from the wall socket before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
- Do not use this product near water.
- Do not place this product on an unstable cart, stand, or table. The product may fall, causing serious damage to the product.
- Slots and openings in the cabinet and the back or bottom are provided for ventilation; to ensure reliable operation of the product and to protect it from overheating, these openings must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug, or other similar surface. This product should never be placed near or over a radiator or heater. This product should never be placed in a built-in installation unless proper ventilation is provided.
- 8 This product should be operated from the type of power source indicated on the label. If you are not sure of the type of power available, call your dealer or local power company.
- This product is equipped with a 3-wire grounded plug, a plug having a third (grounded) pin. This plug will only fit into a grounded power outlet. This is a safety feature. If you are unable to insert the plug into the outlet, call your electrician to replace your obsolete outlet. Do not defeat the purpose of the grounded pluq.
- 10 Do not allow anything to rest on the power cord. Do not place this product where people can walk on the cord.
- 11 Do not place anything in front of the machine that will block received faxes. Do not place anything in the path of received faxes.
- **12** Do not touch a document during printing.
- 13 Never push objects of any kind into this product through cabinet slots, since they may touch dangerous voltage points or short out parts resulting in a risk of fire or electric shock. Never spill liquid of any kind on the product.

- 14 Do not attempt to service this product yourself, because opening or removing covers may expose you to dangerous voltage points and/or other risks. Refer all servicing to service personnel.
- 15 Wait until pages have exited the machine before picking them up.
- 16 Unplug this product from the wall socket and refer servicing to Authorized Service Personnel under the following conditions:
 - When the power cord is damaged or frayed.
 - If liquid has been spilled into the product.
 - If the product has been exposed to rain or water.
 - If the product does not operate normally when the operating instructions are followed. Adjust only those controls that are covered by the operating instructions. Improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to normal operation.
 - If the product has been dropped or the cabinet has been damaged.
 - If the product exhibits a distinct change in performance, indicating a need for service.

Important Information for New Zealand

Important Safety Instructions

- 1 Read all of these instructions.
- Save them for later reference.
- Follow all warnings and instructions marked on the product.
- Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
- The grant of a Telepermit for any item of terminal equipment indicates only that Telecom has accepted that the item complies with minimum conditions for connection to its network. It indicates no endorsement of the product by Telecom, nor does it provide any sort of warranty. Above all, it provides no assurance that any item will work correctly in all respects with another item of Telepermitted equipment of a different make or model, nor does it imply that any product is compatible with all of Telecom's network services.
- 6 This equipment does not fully meet Telecom's impedance requirements. Performance limitations may occur when used in conjunction with some parts of the network. Telecom will accept no responsibility should difficulties arise in such circumstances.
- If a charge for local calls is acceptable, the "Dial Button" should not be used for local calls. Only the 7-digits of the local number should be dialled from your telephone. Do not dial the area code digit or the "0" prefix.
- 8 This equipment shall not be set to make automatic calls to the Telecom '111' Emergency Service.
- **9** This equipment should not be used under any circumstances which may constitute a nuisance to other Telecom customers.
- **10** Not all telephones will respond to incoming ringing when connected to the extension socket.
- 11 The answer delay setting of this equipment shall not be set to less than the default setting as this will destroy Caller ID information.

- All persons using this device for recording telephone conversations shall comply with New Zealand law. This requires that at least one party to the conversation is to be aware that it is being recorded. In addition, the Principles enumerated in the Privacy Act 1993 shall be complied with in respect to the nature of the personal information collected, the purpose for its collection, how it is to be used and what it disclosed to any other party.
- 13 Do not place this product on an unstable surface, stand, or table. The product may fall, causing serious damage to the product.
- 14 Slots and openings in the cabinet and the back or bottom are provided for ventilation; to ensure reliable operation of the product and to protect it from overheating, these openings must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug, or other similar surface. This product should never be placed near or over a radiator or heater. This product should not be placed in a built-in installation unless proper ventilation is provided.
- 15 This product should be operated from the type of power source indicated on the label. If you are not sure of the type of power available, consult with your dealer or local power company.
- 16 This product is equipped with a 3-wire earthed plug. This plug will fit into only an earthed socket. This is a safety feature. If you are unable to insert the plug into the outlet, contact your electrician to replace your obsolete socket. Do not defeat the purpose of an earthed plug.
- 17 Do not allow anything to rest on the power cord. Do not locate this product where people can walk on the cord.
- 18 Do not place anything in front of the machine that will block received faxes. Do not place anything in the path of received faxes.
- 19 Do not touch a document during printing.
- 20 Never push objects of any kind into this product through cabinet slots, since they may touch dangerous voltage points or short out parts resulting in a risk of fire or electric shock. Never spill liquid of any kind on the product.

- 21 Do not attempt to service this product yourself, because opening or removing covers may expose you to dangerous voltage points and/or other risks. Refer all servicing to service personnel.
- 22 Unplug this product from the mains power and telephone line sockets, and refer servicing to qualified Service Personnel under the following conditions:
 - If the power cord is damaged or frayed.
 - If liquid has been spilled into the product.
 - If the product has been exposed to rain or water.
 - If the product does not operate normally when the operating instructions are followed. Adjust only those controls that are covered by the operating instructions. Improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to normal operation.
 - If the product has been dropped or the cabinet has been damaged.
 - If the product exhibits a distinct change in performance, indicating a need for service.
- 23 This unit will only work in conjunction with a tone signalling (DTMF) telephone, but some telephones are not compatible. Since noise or speech from the telephone can upset dialling from this unit, errors may result if the devices are used together in other than quiet conditions.
- 24 Where it is necessary to dial prefix digits, such as a Caller Display override code ("0196" or "0197"), this unit will have to be used in conjunction with an associated tone signalling (DTMF) telephone.
- 25 Note that some telephones are not compatible with this unit and dialling errors may result if the two devices are used together in other than quiet conditions. The Telecom Faults Service is not to be called should such problems arise. In such cases, it is recommended that the prefix and wanted number are dialled manually.
- **26** This equipment may not provide for the effective hand-over of a call to another device connected to the same line.

IMPORTANT-For Your Safety

To ensure safe operation the three-pin plug supplied must be inserted only into a standard three-pin power point which is effectively grounded through the normal household wiring.

Extension cords used with the equipment must be three-conductor and be correctly wired to provide connection to ground. Incorrectly wired extension cords are a major cause of fatalities.

The fact that the equipment operates satisfactorily does not imply that the power is grounded and that the installation is completely safe. For your safety, if in any doubt about the effective grounding of the power, consult a qualified electrician.

Disconnect device

This machine must be installed near a power outlet, which is easily accessible. In case of emergencies, you must disconnect the power cord from the power outlet in order to shut off power completely.

IMPORTANT NOTICE

Under power failure conditions, this telephone may not operate. Please ensure that a separate telephone, not dependent on local power, is available for emergency use in emergencies.

Important Information for Some Countries

Important Safety Instructions

- 1 Read all of these instructions.
- Save them for later reference.
- Follow all warnings and instructions marked on the product.
- Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
- Do not place this product near water.
- Do not place this product on an unstable cart, stand, or table. The product may drop, causing serious damage to the product.
- Slots and openings in the cabinet and the back or bottom are provided for ventilation; to ensure reliable operation of the product and to protect it from overheating, these openings must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug, or other similar surface. This product should never be placed near or on a radiator or heater. This product should never be placed in a built-in installation unless proper ventilation is provided.
- 8 This product should be operated from the type of power source indicated on the label. If you are not sure of the type of power available, consult with your dealer or local power company.
- This product is equipped with a 2-wire grounding type plug or a 3-wire grounding type plug (Only for Singapore, Malaysia, Hong Kong and India), a plug having two or three pins. This plug will only fit into only a grounding-type power outlet. This is a safety feature. If you are unable to insert the plug into the outlet, contact your electrician to replace your obsolete outlet. Do not defeat the purpose of the grounding-type plug.
- 10 Do not allow anything to rest on the power cord. Do not place this product where people can walk on the cord.

- 11 If an extension cord is used with this product, make sure that the total ampere ratings on the products plugged into the extension cord do not exceed the extension cord ampere rating.
- 12 Do not place anything in front of the machine that will block received faxes. Do not place nything in the path of received faxes.
- 13 Do not touch a document during printing.
- 14 Never push objects of any kind into this product through cabinet slots, since they may touch dangerous voltage points or short out parts resulting in the risk of fire or electric shock. Never spill liquid of any kind on the product.
- 15 Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltage points and/or other risks, and may void your warranty. Please refer all servicing to our Authorized Service Personnel. A list of Authorized Service Centres has been included for your convenience, or you may contact the Brother Dealer for Service.
- 16 Unplug this product from the wall outlet and refer servicing to Authorized Service Personnel under the following conditions:
 - If the power cord is damaged or frayed.
 - If the product has been spilled by liquid.
 - If the product has been exposed to rain or water.
 - If the product does not operate normally when the operating instructions are followed. Adjust only those controls that are covered by the operating instructions. Improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to normal operation.
 - If the product has been dropped or the cabinet has been damaged.
 - If the product exhibits a distinct change in performance, indicating a need for service.

17 To protect your product against power surges, we recommend the use of a power protection device (Surge Protector).



For protection against the risk of electrical shock, always disconnect all cables from the wall outlet before servicing, modifying or installing the equipment.

This equipment may not be used on coin service lines provided by the telephone company or connected to party lines.

Brother cannot accept any financial or other responsibilities that may be the result of your use of this information, including direct, special or consequential damages. There are no warranties extended or granted by this document.

Trademarks

The Brother logo is a registered trademark of Brother Industries, Ltd.

Brother is a registered trademark of Brother Industries, Ltd.

Multi-Function Link is a registered trademark of Brother International Corporation.

© Copyright 2003 Brother Industries, Ltd. All rights reserved.

Windows and Microsoft are registered trademarks of Microsoft in the U.S. and other countries.

Macintosh is a registered trademark of Apple Computer, Inc.

PaperPort and TextBridge are registered trademarks of ScanSoft, Inc.

Presto! PageManager is a registered trademark of NewSoft Technology Corporation.

Each company whose software title is mentioned in this manual has a Software License Agreement specific to its proprietary programs.

All other brand and product names mentioned in this User's Guide are registered trademarks of their respective companies.

Troubleshooting

Error messages

As with any sophisticated office product, errors may occur. If this happens, your machine identifies the problem and displays an error message. The most common error messages are shown below.

ERROR MESSAG	ERROR MESSAGES			
ERROR MESSAGE	CAUSE	ACTION		
Check Cartridge	An ink cartridge is not properly installed.	Take out the ink cartridge and put it in again seating it properly. (See <i>Replacing the ink cartridges</i> on page 12-20.)		
Check Original	The documents was longer than 90 cm.	See Using the automatic document feeder (ADF) on page 2-1.		
Check Paper Size	Paper is not the correct size.	Reload the correct size of paper (A4), and then press Mono Start or Colour Start .		
Check Paper	The machine is out of paper. OR— The paper is jammed in the machine.	Add paper, and then press Mono Start or Colour Start. See <i>Printer jam or paper jam</i> on page 12-5.		
Comm.Error	Poor phone line quality caused a communication error.	Try the call again. If the problem continues, call the telephone company and ask them to check your phone line.		
Connection Fail	You tried to poll a fax machine that is not in Polled Waiting mode.	Check the other fax machine's polling setup.		
Cover Open	Control panel cover or top cover is not closed completely.	Open, then close the covers.		

ERROR MESSAG	ES	
ERROR MESSAGE	CAUSE	ACTION
Disconnected	The other person or other person's fax machine stopped the call.	Try to send or receive again.
Data Remains	Print data remains in the machine's memory.	Re-start printing from your computer.
	Print data remains in the machine's memory. The USB cable was unplugged while the computer was sending the data to the machine.	Press Stop/Exit . The machine will cancel the job and eject the page that is being printed.
High Temperature	The print heads are too warm.	Allow the machine to cool down.
Ink Empty	One or more of the ink cartridges is empty. The machine will stop all print operations. While memory is available, black and white faxes will be received into memory. If a sending machine has a colour fax, the machine's 'handshake' will request that the fax be sent as black and white. If the sending machine has the ability to convert it, the colour fax will be received into memory as a black and white fax.	Replace the ink cartridges. (See Replacing the ink cartridges on page 12-20.)
Insert Document	The docment was not inserted properly.	See Load documents on page 2-1.
Low Temperature	The print heads are too cold.	Allow the machine to warm up.
Machine Error	The machine has a mechanical problem.	Call Brother Customer Service.
Near Empty	One or more of the ink cartridges are running out of ink. If a sending machine has a colour fax, the machine's 'handshake' will request that the fax be sent as black and white. If the sending machine has the ability to convert it, the colour fax will be received into memory as a black and white fax.	Order a new ink cartridge.
No Response/Busy	The number you dialled does not answer or is busy.	Verify the number and try again.
Not Registered	You tried to access a One-Touch or Speed-Dial number that is not programmed.	Set up the One-Touch or Speed-Dial number. (See Storing One-Touch Dial numbers on page 7-1 and Storing Speed-Dial numbers on page 7-2.)

ERROR MESSAG	ERROR MESSAGES				
ERROR MESSAGE	CAUSE	ACTION			
Out of Memory (May occur when the machine's used as a printer)	You can't store data in the memory.	(Fax sending or copy operation in process) Press Stop/Exit and wait until the other operations in progress finish and then try again. — OR — Clear the data in the memory. (See Out of Memory message on page 10-3.) (Printing operation in process) Reduce print resolution.			
Paper Jam	The paper is jammed in the machine.	(See <i>Printer jam or paper jam</i> on page 12-5.)			

Document jam

If the document is jammed, follow the steps below.

Document is jammed inside the front of the control panel.


- 1 Remove any paper from the ADF that is not jammed.
- 2 Pull the jammed document out toward the front of the machine.



3 Press Stop/Exit.

Document is jammed inside the back of the control panel.

- 1 Remove any paper from the ADF that is not jammed.
- 2 Open the control panel cover.
- 3 Pull the jammed document out toward the back of the machine.

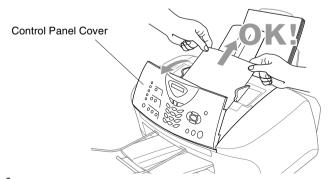

4 Close the control panel cover.

Printer jam or paper jam

Remove the jammed paper depending on where it is jammed in the machine.


Paper is jammed inside the front of the machine.

1 Pull the paper toward you.



Paper is jammed in the paper tray.


1 Remove any paper from the paper tray that is not jammed.

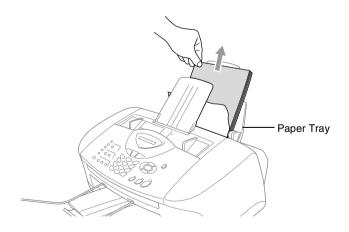

2 Pull up the jammed paper to remove it.




If it is difficult to pull the jammed paper, try to pull it while holding down the Paper Release Lever.

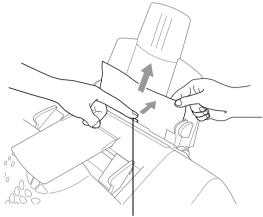


Paper Release Lever

Paper is jammed inside the paper tray

1 Pull the paper tray out of the machine.




2 Pull up the jammed paper to remove it.

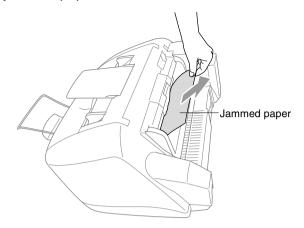

Paper is jammed inside the machine.

Open the control panel cover by lifting it toward you, and then lift the top cover toward the back.

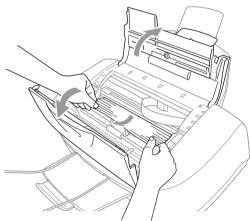

- 2 Remove the jammed paper.
- If the jammed paper is under the Print Head, unplug the machine, and then you can move the Print Head to remove the paper.
- 3 Close top cover and the control panel cover.

If you are having difficulty with your machine

If you think there is a problem with your machine or the way your faxes look, *make a copy first*. If the copy looks good, the problem is probably not your machine. Check the chart below and follow the troubleshooting tips.

DIFFICULTY	SUGGESTIONS		
Printing or Receiving Faxes			
Condensed print and white streaks across the page or the top and bottom of sentences are cut off.	This can be caused by static or interference on the telephone line. You can make a copy using the Mono Start key to see if the same problem occurs. If the copy is also bad, call your Brother dealer for service.		
Poor quality print.	Make sure the Printer Driver or Paper Type setting in the menu matches the type of paper you are using. (See <i>Media Type</i> on page 1-6 in Software User's Guide on the CD-ROM and <i>Setting the Paper Type</i> on page 4-6.) If you are using plain paper, try using the types of recommended paper. (See <i>About paper</i> on page 2-3.) Don't handle the paper until the ink is dry. Adjust the Vertical Alignment. (See <i>Print Quality Check</i> on page 12-11.)		
Smudged stain at the top center of the printed page.	Make sure the paper is not too thick or not curled. (See <i>About paper</i> on page 2-3.)		
Printing is too dark or too light.	Make sure your ink cartridges are fresh. Cartridges are good for up to two years, after that the ink may become clogged. Cartridge expiration dates are printed on the package. Make sure the Printer Driver matches the type of paper you are using. (See <i>Media Type</i> on page 1-6 in Software User's Guide on the CD-ROM.) Try using the recommended types of paper. (See <i>About paper</i> on page 2-3.) The recommended environment for your machine is between 20°C to 33°C.		
Printing appears dirty or ink seems to run.	Make sure you are using the proper types of paper. (See <i>About paper</i> on page 2-3.) Don't handle the paper until the ink is dry. The recommended environment for your machine is between 20°C to 33°C.		
White horizontal lines appear in text or graphics.	Clean the print heads. (See Cleaning the print head on page 12-11.)		
Stains appear on the reverse side or at the bottom of the page	Make sure the Printer Platen is not dirty with ink. (See <i>Cleaning the machine printer platen</i> on page 12-19.)		
Vertical black lines when receiving.	The sender's scanner may be dirty. Ask the sender to make a copy to see if the problem is on with the sending machine. Try receiving from another fax machine. If the copy is also bad, call your Brother dealer for service.		

DIFFICULTY	SUGGESTIONS
Received colour fax prints only in black and white.	Replace the colour ink cartridges that are empty or nearly empty, and then ask the other person to send the colour fax again. (See <i>Replacing the ink cartridges</i> on page 12-20.) Check that Fax Storage is set to OFF. (See <i>Setting Fax Storage</i> on page 8-2.)
Left and Right margins are cut off.	Turn on Auto Reduction. (See <i>Printing a reduced incoming fax (Auto Reduction)</i> on page 5-7.)
Phone Line or Connections	
The machine does not answer when called.	Make sure the machine is in the correct receiving mode for your setup. (See <i>Basic receiving operations</i> on page 5-1.) Check for a dial tone. If possible, call your machine to hear it answer. If there is still no answer, check the telephone line cord connection. If there is no ringing when you call your machine, ask your telephone company to check the line.
Sending Faxes	
Poor sending quality.	Try changing your resolution to ${\tt Fine}\ or\ {\tt S.Fine}.$ Make a copy to check your machine's scanner operation.
Transmission Verification Report says 'Result:NG' or 'Result:ERROR'.	There is probably temporary noise or static on the line. Try sending the fax again. If you send a PC FAX message and get 'Result:NG' or, on the Transmission Verification Report, your machine may be out of memory. To gain extra memory, you can turn off Fax Storage (see Setting Fax Storage on page 8-2), print fax messages in memory (see Printing a fax from the memory on page 5-8) or cancel a Delayed Fax or Polling Job (see Cancelling a scheduled job on page 6-11). If the problem continues, ask the telephone company to check your phone line.
Vertical black lines when sending.	If the copy you made shows the same problem, your scanner is dirty. (See <i>Routine maintenance</i> on page 12-18.)
Handling Incoming Calls	
machine 'Hears' Voice as CNG Tone.	If your machine is set to Fax Detect ON, it is more sensitive to sounds. Your machine may mistakenly interpret certain voices or music on the line as a calling fax machine and respond with fax receiving tones. Deactivate the fax by pressing Stop/Exit . Try avoiding this problem by turning Fax Detect to OFF. (See Fax Detect (FAX-1820C only) on page 5-6 and Fax Detect (MFC-3220C only) on page 5-5.)
Sending a Fax Call to the machine.	If you answered at the machine, press Mono Start and hang up immediately. If you answered on an extension phone, press your Fax Receive Code (default setting is (*\ 51). When your machine answers, hang up.
Custom features on a single line.	If you have Call Waiting, Call Waiting/Caller ID, Ring Master, Voice Mail, an alarm system or any other custom feature on a single phone line with your machine, it may create a problem sending or receiving fax data. For example: If you are sending or receiving a fax message while a custom feature signal comes through on the line, the signal can temporarily interrupt or disrupt the fax data. Brother's ECM feature should help overcome this problem. This condition is related to the telephone system industry and is common to all devices that send and receive data on a single, shared line with custom features. If avoiding a slight interruption is crucial to your business, we recommend a separate phone line with no custom features.

DIFFICULTY	SUGGESTIONS		
Printer Difficulties (For MFC-3220C Only)			
Horizontal lines appear in text or graphics.	Clean the print head. (See <i>Cleaning the print head</i> on page 12-11.) If you clean the print heads five times and the print has not improved, ca Brother or your dealer for service.		
Scanning Difficulties (For MF	C-3220C Only)		
TWAIN errors appear while scanning.	Make sure the Brother TWAIN driver is selected as the primary source. In PaperPort, click Scan in the File menu and select the Brother TWAIN driver.		
Software Difficulties (For MFC	C-3220C Only)		
Cannot perform '2 in 1 or 4 in 1' printing.	Check that the paper size setting in the application and in the printer driver are the same.		
Cannot print when using Paint Brush.	Try setting the Display setting to '256 colours'.		
Cannot print when using Adobe Illustrator.	Try to reduce the print resolution.		
Thick lines and thin lines appear alternately. (banding)	Open the 'Basic' tab in the printer driver. Click 'Setting' in the Basic tab of the printer driver. Turn OFF 'Bi-Directional Printing' by un-checking it. (See Bi-Directional Printing on page 1-7 in Software User's Guide on the CD-ROM.)		
There are some dense lines.	Check 'Reverse Order' in the Basic tab of the printer driver.		
Printing is slow.	In the 'Colour' tab from the 'Advanced' tab in the printer driver, uncheck the Colour Enhancement.		
Colour Enhancement is not working properly.	If the image data is not full colour in your application (Such as 256 colour), Colour Enhancement will not work. Please use at least 24 bit colour data with the Colour Enhancement feature.		
'MFC is Busy' or 'MFC Connect Failure' Error Message appears.	Make sure the machine is not showing an error message on the LCD.		
'MFC Connect Failure'	If the MFC is not connected to your PC and you have loaded the Brother software, the PC will show 'MFC Connect Failure' each time you restart Windows®. You can ignore this message or you can turn it off as follows. Double-click "\too\warnOff.REG" from the supplied CD-ROM.		
	The Scan key on the MFC's control panel will not work unless you restart your PC with the MFC connected. To turn it back on, Double-click "\tool\WarnOn.REG" from the supplied CD-ROM.		

How to improve print quality

Cleaning the print head

To ensure good print quality, the machine will regularly clean the print head. You can start the cleaning process when needed.

Clean the print head and ink cartridges if you get a horizontal line in the text or graphics on your printed pages. You can clean two colours at a time (Black/Cyan, Yellow/Magenta), or all four colours at once.

Cleaning the print head consumes ink. Cleaning too often uses ink unnecessarily.



Do NOT clean the print head by touching it with your hand or a cloth.

- 1 Press Ink.
- **2** Press or to select Cleaning. Press Menu/Set.
- 3 Press or to select the colour you want to clean.

Press **Menu/Set**.

The machine will clean the print head. When cleaning is finished, the machine will go back standby mode automatically.



If you clean the print head at least five times and the print has not improved, call Brother your dealer for service.

Print Quality Check

If the print quality is not good, you can print a Print Quality Check Sheet to help you find the settings you may need to change.

Press Menu/Set, 4.

4.Test Print

2 Press Mono Start or Colour Start.

The machine begins printing the Print Quality Check Sheet.

3 Check the sheet to see if the quality and alignment are OK by following STEPs A and B.

STEP A: Colour block quality check

The LCD shows:


Is Step "A" OK?

- 4 Check the quality of the four colour blocks on the sheet. (Black/Cyan/Yellow/Magenta).
- 5 If all lines are clear and visible, press 1 (Yes) to go to STEP B.
 —OR—

If you can see missing short lines as shown below, press 2 (No).




The LCD will ask you if the print quality is OK for each colour.



6 Press 2 (No) for any colour with a problem.

The LCD shows:

Press 1 (Yes). The machine will start cleaning the colours.



- 7 After cleaning is finished, press Mono Start or Colour Start. The machine will start printing the Print Quality Check Sheet again and then return to STEP A.
- 8 If STEP A is OK, press 1 to proceed to STEP B.

STEP B: Alignment Check

The LCD shows:

"B" OK? Is Step 1.Yes 2.No

9 Check the 600 dpi and 1200 dpi test prints to see if number 5 most closely matches number 0. If the number 5 sample of both the 600 dpi and 1200 dpi are the best matches, press 1 (Yes) to finish STEP B.

-OR-

If another test print number is a better match for either 600 dpi or 1200 dpi, press 2 (No) to select it.

10 For 600 dpi, press the number of the test print that most closely matches the number 0 sample (1-8).

600dpi Adjust Select Best #

11 For 1200 dpi, press the number of the test print that most closely matches the number 0 sample (1-8).

1200dpi Adjust Select Best

- 12 Repeat Steps 1 and 2 (in Print Quality Check) to print another sample Print Quality Check Sheet and then check it.
- 13 Press Stop/Exit.





When an ink head nozzle is clogged the printed sample looks like this.



After the ink head nozzle is cleaned, the horizontal lines are gone.

If you still see missing ink in this Print Quality Check Sheet, repeat the cleaning and test print procedures at least five times. If ink is still missing after the fifth cleaning and test print, replace the ink cartridge for the clogged colour. (Perhaps the ink cartridge was in your machine over six months or the expiration date written on the cartridge package has passed. Or, the ink may not have been stored properly before use.)

After replacing the ink cartridge, check it by printing another Print Quality Check Sheet. If the problem still exists, repeat the cleaning and test print procedures at least five times for the new ink cartridge. If ink is still missing, call your Brother dealer.



Do NOT touch the print head. Touching the print heads may cause permanent damage and may void the print head's warranty.

Checking the ink volume

You can check the ink that is left in the cartridge.

- 1 Press Ink.
- **2** Press or to select

Ink Volume

Press Menu/Set.

3 Press or to select the colour you want to check.

The LCD shows the ink volume.

Bk:-□□□■□□□+

4 Press Stop/Exit.

Packing and shipping the machine


Whenever you transport the machine, use the packing materials that came with your machine. If you do not pack the machine properly, you could void your warranty.

Caution

Do NOT unplug the machine after a print job until you hear the final click.

1 First, remove all the ink cartridges and attach the white shipping cover. (See Replacing the ink cartridges on page 12-20.) After attaching the white shipping cover, press all the ink cartridge covers down.


> When attaching the white shipping cover, make sure it clips into place as shown in the diagram.



Caution


If you are not able to find the shipping cover, do NOT remove the ink cartridges before shipping. It is essential that the machine be shipped with either the shipping cover or the ink cartridges in position. Shipping without them will cause damage to your machine and may void your warranty.

- 2 Unplug the machine from the telephone wall socket and remove the telephone line cord from machine.
- 3 Unplug the machine from the AC outlet.
- 4 Unplug the USB cable from the machine, if it is connected.
- 5 Attach the yellow protective bar.




Protective Yellow Bar

- 6 Remove the paper tray and output paper support, ADF Document Output support and ADF Document support. If your machine is a fax model, remove the handset and handset curled cord.
- Wrap the machine in the bag and place it in the original carton with the original packing material.

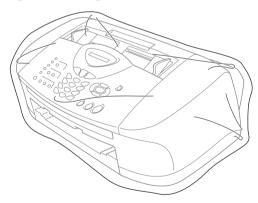

8 Pack the printed materials in the original carton as shown below. Do not pack the used ink cartridges in the carton.

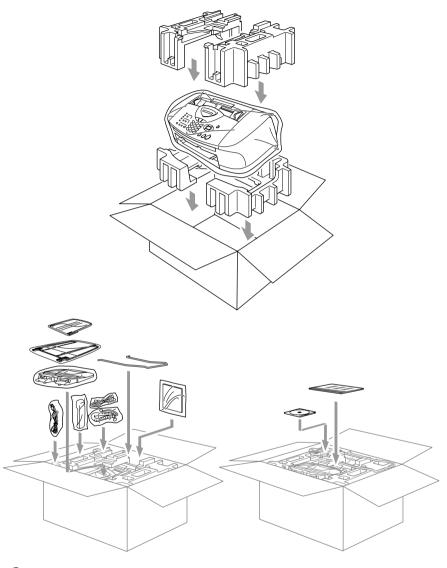


9 Close the carton.

Routine maintenance

Cleaning the scanner


Unplug the machine, and then open the control panel cover. Clean the flat white pressure bar and the glass strip below the bar with isopropyl alcohol on a lint-free cloth.

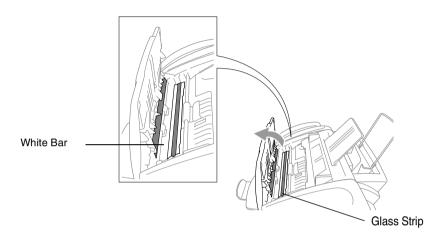

Cleaning the machine printer platen

WARNING

- Be sure to unplug the machine from the AC power outlet before cleaning the printer platen.
- Be careful not to touch the paper feed star wheels, flat cable and encode film.
- When you want to clean your machine printer platen, wipe it with a lint free cloth that is dry.

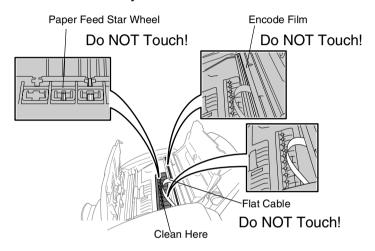


Replacing the ink cartridges

Your machine is equipped with an ink dot counter that automatically monitors the ink level in each colour cartridge. When the counter detects an ink cartridge is running out of ink, the machine will notify you with a message on the LCD.


The LCD shows you which colour cartridges are low or empty. Be sure to follow the LCD prompts so you replace the colour cartridges in the appropriate order.


When the ink cartridges are running low, you must use the lnk key to begin the cartridge replacement (Steps 1 to 3). If the ink is empty, skip to Step 3.

- 1 Press Ink.
- Press or to select Replace Ink. Press Menu/Set.
- If one or more ink cartridges are empty, for example Black, the LCD shows Pls Open Cover.
- **3** Open the control panel cover, and then lift the top cover.
- **4** Push the appropriate coloured ink cartridge covers and remove the used ink cartridge.

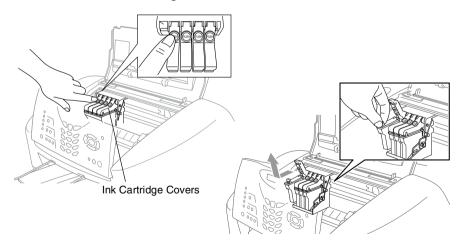

- 5 Open the new ink cartridge bag for the colour shown on the LCD, and then take out the ink cartridge.
- 6 Hold the new ink cartridge as shown in the illustration, and then peel the sealing tape from the side of the ink cartridge. Carefully peel the tape in the direction away from you.





- 7 Each colour has its own correct position. Insert each new ink cartridge into the carriage.
- 8 After installing the ink cartridges, close the top cover and control panel cover. Your machine prepares for a "head cleaning" and goes online.

The LCD prompts you to verify that you removed the ink cartridge for each colour. Example: Have you removed Blck? 1.Yes 2.No.

If you removed the ink cartridge, press 1.

-OR-

If you did not remove the ink cartridge, press 2.

The LCD prompts you to verify that the ink cartridge was a new one. Example: Changed to new Blck? 1. Yes 2. No.

10 If the ink cartridge you installed is not a brand new one, please be sure to press 2.

-OR-

For each *new* cartridge, press **1** on the dial pad to automatically reset the ink dot counter for that colour . (The ink dot counter enables the machine to notify you when a colour is running low.) The machine will enter a cleaning cycle for approximately 3 minutes for each replaced cartridge. The LCD alternately shows Cleaning and Please Wait.

When the machine completes the cleaning cycle, the LCD returns to Standby mode condition.

MARNING

If ink gets in your eyes, irrigate them with water immediately and consult a doctor if you are concerned.

Caution

- DO NOT remove ink cartridges if you do not need to replace them. If you do so, it may reduce the ink quantity and the printer will not know the quantity of ink left in the cartridge.
- DO NOT shake the ink cartridges, because the ink may spill when you take off the sealing tape.
- If ink stains your body or clothing, wash with soap or detergent immediately.
- If you install an ink cartridge in the wrong colour position, you must clean the print head several times before you start printing (after correcting the cartridge installation) because the colours were mixed.
- Once you open an ink cartridge, install it in the machine and use it up within six months of installation. Use unopened ink cartridges by the expiration date written on the cartridge package.

■ Brother strongly recommends that you do not refill the ink cartridges provided with your machine. We also strongly recommend that you continue to use only Genuine Brother Brand replacement ink cartridges. Using or attempting to use potentially incompatible inks and/or cartridges in your machine may cause damage to the machine itself and/or it may result in unsatisfactory print quality. Our warranty coverage does not apply to any problem that was caused by the use of unauthorized third party ink and/or cartridges. To protect your investment and guarantee your print quality please continue to replace consumed ink cartridges with only Genuine Brother Branded Supplies.



If the Ink Empty message is on the display after you have installed ink cartridges, check that the ink cartridges are installed peoperly.



- **ADF (automatic document feeder)** The document can be placed in the ADF and scanned one page at a time automatically.
- Auto Reduction Reduces the size of incoming faxes.
- **Automatic fax transmission (MFC-3220C only)** Sending a fax without picking up the handset of an external phone.
- Automatic fax transmission (FAX-1820C only) Sending a fax without picking up the handset of the machine or pressing Tel/Mute/R
- **Automatic Redial** A feature that enables your machine to redial the last fax number after five minutes if the fax did not go through because the line was busy.
- **Backup Print** Your machine prints a copy of every fax that is received and stored in memory.
 - This is a safety feature so you will not lose messages during a power failure.
- **Batch Transmission** (Black and white faxes only) As a cost savings feature, all delayed faxes to the same fax number will be sent as one transmission.
- **Brightness** Changing the Brightness makes the whole image lighter or darker.
- **Beeper Volume** Volume setting for the beep when you press a key or make an error.
- **Broadcasting** The ability to send the same fax message to more than one location.
- **Cancel Job** Cancels a programmed job, like Delayed Fax or Polling.
- **CNG tones** The special tones (beeps) sent by fax machines during automatic transmission to tell the receiving machine that a fax machine is calling.

- Coding method Method of coding the information contained in the document. All fax machines must use a minimum standard of Modified Huffman (MH). Your machine is capable of greater compression methods, Modified Read (MR), Modified Modified Read (MMR) and JPEG, if the receiving machine has the same capability.
- **Communication error (or Comm. Error)** An error during fax sending or receiving, usually caused by line noise or static.
- **Compatibility group** The ability of one fax unit to communicate with another. Compatibility is assured between ITU-T Groups.
- **Contrast** Setting to compensate for dark or light documents, by making faxes or copies of dark documents lighter and light documents darker.
- **Delayed Fax** Sends your fax at a specified later time that day.
- **Distinctive Ring** A subscriber service purchased from the telephone company that gives you another phone number on an existing phone line. The Brother machine uses the new number to simulate a dedicated fax line.
- **Dual Access** Your machine can scan outgoing faxes or scheduled jobs into memory at the same time it is sending a fax or receiving or printing an incoming fax.
- **ECM (Error Correction Mode)** Detects errors during fax transmission and resends the pages of the fax that had an error.
- **Extension phone** A telephone on the fax number that is plugged into a separate wall socket.
- **External phone** A TAD (telephone answering device) or telephone that is plugged into the socket.
- **F/T Ring Time** The length of time that the Brother machine rings (when the Receive Mode setting is Fax/Tel) to notify you to pick up a voice call that it answered.
- **Fax Detect** Enables your machine to respond to CNG tones if you interrupt a fax call by answering it.
- **Fax Forwarding** Sends a fax received into the memory to another pre-programmed fax number.

- Fax Receive Code Press this code (* 5 1) when you answer a fax call on an extension or external phone.
- **Fax Storage** You can print stored faxes later or retrieve them from another location using Fax Forwarding, or Remote Retrieval functions.
- **Fax tones** The signals sent by sending and receiving fax machines while communicating information.
- **Fax/Tel** You can receive faxes and telephone calls. Do not use this mode if you are using a telephone answering device (TAD).
- **Fine resolution** Resolution is 203 x 196 dpi. It is used for small print and graphs.
- **Gray scale** The shades of gray available for copying and faxing photographs.
- **Group number** A combination of One-Touchand Speed-Dial numbers that are stored on a One-Touch key or in a Speed-Dial location for Broadcasting.
- **Help list** A printout of the complete Menu table that you can use to program your machine when you do not have the User's Guide with you.
- **Fax Journal** Lists information about the last 200 incoming and outgoing faxes. TX means Transmit. RX means Receive.
- **Journal Period** The pre-programmed time period between automatically printed Fax Journal Reports. You can print the Fax Journal on demand without interrupting the cycle.
- **LCD (liquid crystal display)** The display screen on the machine that shows interactive messages during On-Screen Programming and shows the date and time when the machine is idle.
- Manual fax (MFC-3220C only) When you lift the handset of your external telephone so you can hear the receiving fax machine answer before you press Mono Start or Colour Start to begin transmission.
- Manual fax (FAX-1820C only) When you lift the handset of the machine so you can hear the receiving fax machine answer before you press Mono Start or Colour Start to begin transmission.

- **Menu mode** Programming mode for changing your machine's settings.
- **MFL-Pro Suite (MFC-3220C only)** Turns your machine into a printer and a scanner if connected to your computer.
- OCR (optical character recognition) (MFC-3220C only) The bundled ScanSoft® TextBridge® software application converts an image of text to text you can edit.
- **One-Touch** Keys on the machine's control panel where you can store numbers for easy dialling. You can store a second number on each key if you press **Shift** and the One-Touch Key together.
- **Out of Paper Reception** Receives faxes into the machine's memory when the machine is out of paper.
- **Overseas Mode** Makes temporary changes to the fax tones to accommodate noise and static on overseas phone lines.
- **Pause** Allows you to place a 3.5 second delay in the dialling sequence stored on One-Touch keys and Speed-Dial numbers. Press **Redial/Pause** as many times as needed for longer pauses.
- **Photo resolution** A resolution setting that uses varying shades of gray for the best representation of photographs.
- **Polling** The process of a fax machine calling another fax machine to retrieve waiting fax messages.
- Pulse A form of rotary dialling on a telephone line.
- **Quick Dial List** A listing of names and numbers stored in One-Touch and Speed-Dial memory, in numerical order.
- **Real Time Transmission** When memory is full, you can send faxes in real time.
- **Remaining jobs** You can check which jobs are waiting in memory and cancel jobs individually.
- Remote Access Code Your own four-digit code (--- *) that allows you to call and access your machine from a remote location.
- **Remote Retrieval Access** The ability to access your machine remotely from a touch tone phone.

- **Resolution** The number of vertical and horizontal lines per inch. See: Standard, Fine, Super Fine and Photo.
- **Ring Delay** The number of rings before the machine answers in Fax Only mode.
- Ring Volume Volume setting for the machine's ring.
- **Scanning (MFC-3220C only)** The process of sending an electronic image of a paper document into your computer.
- **Search** An electronic, alphabetical listing of stored One-Touch, Speed-Dial and Group numbers.
- **Speed-Dial** A pre-programmed number for easy dialling. You must press the **Search/Speed Dial** key and then #, and the two digit code to start the dialling process.
- **Standard resolution** 203 x 97 dpi. It is used for regular size text and quickest transmission.
- **Station ID** The stored information that appears on the top of faxed pages. It includes the sender's name and fax number.
- **Super Fine resolution** 392 x 203 dpi. Best for very small print and line art.
- **TAD (telephone answering device)** You can connect an external device or answering machine to the EXT. socket of the machine.
- **Telephone Answer Code (Fax/Tel mode only)** When the machine answers a voice call, it pseudo/double-rings. You can pick up at an extension phone by pressing this code (# 5 1).
- **Temporary settings** You can select certain options for each fax transmission and copy without changing the default settings.
- **Tone** A form of dialling on the telephone line used for Touch Tone telephones.
- **Transmission** The process of sending faxes over the phone lines from your machine to the receiving fax machine.
- **User Settings** A printed report that shows the current settings of the machine.
- **Xmit Report (Transmission Verification Report)** A listing for each transmission, that shows its date, time and number.

S Specifications

Product description

General

Memory Capacity 8 MB

Automatic Document U

Feeder (ADF)

Up to 20 pages

Temperature: 20°C - 30°C

Humidity: 50% - 70% Paper: 80 gsm A4 size

Paper Tray 100 Sheets (80 gsm)

Printer Type Ink Jet

Print MethodPiezo with 75×4 nozzlesLCD (Liquid Crystal16 characters \times 1 line

Display)


Power Source 220 - 240V 50/60Hz

Power Consumption Minimum: 4 Wh or less

Standby: 8.5 Wh or less (25°C)

Peak: Under 23 Wh

Dimensions



Weight 7 kg

Noise Operating: 48 dB A or less

Standby: 35 dB A or less

Temperature Operating: 10 - 35°C

Best Print

Quality: 20 - 33°C

Humidity Operating: 20 to 80% (without condensation)

Best Print

Quality: 20 to 80% (without condensation)

Print media

Paper Input Paper Tray

Paper type:

Plain paper, inkjet paper (coated paper), glossy paper, transparencies* and envelopes

Paper size:

Letter, Legal, Executive, A4, A5, A6, JIS_B5, envelopes (commercial No.10, DL, C5, Monarch, JE4), Photo card, Index card. For more details, see *Paper specifications for the paper tray* on page 2-4.

Maximum paper tray capacity: Approx. 100 sheets of 80 gsm plain paper

* Use only transparencies recommended for inkjet printing.

Paper Output Up to 50 sheets of A4 plain paper (Face up print

delivery to the output paper support)

For inkjet (coated paper) and transparency, we recommend removing printed pages from the output paper support immediately after they exit the

machine to avoid smudging.

Copy

Colour/Monochrome Colour/Mono

Copy Speed Mono

Up to 12 pages/minute (A4 paper)

Colour

Up to 10 pages/minute (A4 paper)

Does not include the time it takes to feed the paper.

Based on Brother standard pattern.

Fast mode

Multiple Copies Stacks or Sorts up to 99 pages

Enlarge/Reduce 25% to 400% (in increments of 1%)

Resolution Max. 1200 x 1200 dpi

Fax

Compatibility ITU-T Group 3

Coding System MH/MR/MMR/JPEG
Modem Speed Automatic Fallback

14400 bps:

Document Size ADF Width: 89 mm to 216 mm

ADF Height: 127 mm to 356 mm

Scanning Width 208 mm
Printing Width 204 mm
Gray Scale 256 levels

Polling Types Standard, Secure, Timer Sequential: (B&W only)

Contrast Control Automatic/Light/Dark

(manual setting)

• Horizontal 203 dot/inch (8 dot/mm)

• Vertical Standard -

3.85 line/mm (Black) 7.7 line/mm (Colour)

Fine - 7.7 line/mm (Black/Colour)

Photo - 7.7 line/mm (Black) Superfine - 15.4 line/mm (Black)

One-Touch Dial $10 (5 \times 2)$ Speed-Dial40 stationsBroadcasting100 stations

Automatic Redial 3 times at 5 minute intervals

Auto Answer 2, 3, 4, 5, 6, 7, 8, 9 or 10 rings (for Australia)

1, 2, 3, 4, 5, 6, 7, 8, 9 or 10 rings (for New Zealand)

0, 1, 2, 3, 4, 5, 6, 7, 8, 9 or 10 rings

(for some countries)

Communication Source Public switched telephone network.

Memory Transmission Up to 200*1/170*2 pages (MFC-3220C)

Up to 480*1/400*2 pages (FAX-1820C)

Out of Paper Reception Up to 200*1/170*2 pages (MFC-3220C)

Up to 480*1/400*2 pages (FAX-1820C)

^{*1 &}quot;Pages" refers to the "Brother Standard Chart No. 1" (a typical business letter, Standard resolution, MMR code). Specifications and printed materials are subject to change without prior notice.

^{*2 &}quot;Pages" refers to the "ITU-T Test Chart #1" (a typical business letter, Standard resolution, MMR code). Specifications and printed materials are subject to change without prior notice.

Scanner (MFC-3220C only)

Colour/Monochrome Colour/Monochrome

TWAIN Compliant Yes (Windows® 98/98SE/Me/2000 Professional)

Mac OS® 8.6-9.2/Mac OS® X 10.2.1 or greater

WIA Compliant Yes (Windows® XP)

Resolution Up to $2,400 \times 2,400$ dpi (interpolated)*

Up to $600 \times 1,200$ dpi (optical)

* Maximum 1200 x 1200 dpi scanning with Windows® XP (resolution up to 2400 x 2400 dpi can be selected by using the Brother scanner

utility)

Scanning Speed Colour: up to 9 sec.

Mono: up to 4 sec.

(A4 size in 100 × 100 dpi)

Document Size ADF Width: 89 mm to 216 mm

ADF Height: 127 mm to 356 mm

Scanning Width 210 mm
Gray Scale 256 levels

Mac OS® X scanning is supported in Mac OS® X 10.2.1 or greater.

Printer



For FAX-1820C, you can download the Brother Printer Driver and PC Fax Driver from the Brother Solutions Centre. Visit us at:

http://solutions.brother.com

Printer Driver Windows® 98/98SE/Me/2000 Professional and XP

driver supporting Brother Native Compression

mode and bi-directional capability

Apple® Macintosh® QuickDraw® Driver

For Mac OS® 8.6-9.2/Mac OS® X 10.1/10.2.1 or

greater

Resolution Up to 4800 x 1200 optimized dots per inch (dpi)*

1200 x 1200 dots per inch (dpi) 600 x 600 dots per inch (dpi) 600 x 300 dots per inch (dpi) 600 x 150 dots per inch (dpi)

* Black and White Printing: The MFC prints using black ink up to 4800 x 1200 optimized dpi when Photo mode is selected in the printer driver.

* Colour Printing: The MFC uses Brother's OP Technology to automatically vary the printing resolution for producing the highest quality output. Brother's OP Technology is automatically activated during colour printing using Photo mode and selects the print resolution appropriate for the printing task up to 4800 x 1200 optimized dpi when printing on photo quality paper.

* Output image quality varies based upon many factors including but not limited to input image resolution and quality and print media.

Print Speed up to 14 pages/minute (Mono)*

up to 12 pages/minute (Colour)*

* Based on Brother standard pattern.

* A4 size in draft mode.

* Does not include the time it takes to feed the

paper.

Printing Width 204 mm

Disk-Based Fonts 35 TrueType

Interfaces

USB

A Standard Universal Serial Bus cable that is not longer than 2.0 m.

Computer requirements

Minimum System Requirement Computer Platform &		Processor	Minimum	Recommended	Available Hard Disk	
Operating S	ystem Version	Minimum Speed	RAM	RAM	Driver Application Software*1	
Windows® Operating		32 MB	80 MB 100 MI	100 MB		
System	Me	Pentium 150MHz	32 MB	64 MB		
	2000 Professional	Pentium 133MHz	64 MB	128 MB		
	XP*3	Pentium 233MHz				180 MB
Apple [®] Macintosh [®] Operating System	Mac OS® 8.6 - 9.2 (Printing*4, Scanning and PC-FAX Send Only)	All base models meet minimum Requirements	32 MB	64 MB	80 MB 200 MB	
	Mac OS® X 10.1/10.2.1 or greater (Printing, Scanning*2*4, PC-FAX Send and Remote Setup Only)		128 MB	160 MB		

NOTE: All registered trademarks referenced herein are the property of their respective companies.

For the latest drivers, go to the Brother Solutions Center at http://solutions.brother.com/



- * * Application Software is different for Windows® and Macintosh®
- *2 Scanning is supported in 10.2.1 or greater.
- *3 Maximum 1200 x 1200 dpi scanning with Windows® XP. (Resolutions up to 2400 x 2400 dpi can be selected using the Brother Scanner Utility.) (MFC-3220C)
- *4 Dedicated "Scan" key not supported in Mac® Operations System. (MFC-3220C)

Consumable items

Ink

Black and 3 individual colour ink cartridges separate from the print heads.

Service Life of Ink Cartridge

Approximately 500 page/Black cartridge at 5% coverage with 600 x 150 dpi resolution (Fast). Approximately 400 page/Colour cartridge at 5% coverage with 600 x 150 dpi resolution (Fast).

These numbers are based on consecutive printing; the numbers will vary based on print frequency and number of pages.

The machine periodically cleans the print head to maintain print quality. This process consumes a small amount of ink.

Index

Α	paper10-9
Access codes, storing and	Quality key10-5
dialling7-6	Quality setting10-16
ADF (Automatic Document	single10-2
Feeder)2-1	Sort10-13
Automatic	temporary settings10-4
fax receive5-1	Credit Card Numbers7-6
fax redial6-8	Custom telephone features
tax rodiar	1-13, 12-9
В	5
Broadcasting6-12	D
setting up Groups for7-4	Date and Time4-1
3 1 1	Delayed Batch Transmission
C	6-15
Cancelling	Delayed Fax6-14
fax forwarding8-5	Dialling
fax jobs in memory6-10	a pause7-7
jobs awaiting redial6-11	access codes and credit card
Cleaning	numbers7-6
print head12-11	automatic fax redial6-8
printer platen12-19	Groups6-12
scanner12-18	manual6-1
CNG tones1-7	One-Touch6-2
Connecting	Search6-3
external TAD1-10	Speed-Dial6-2
external telephone1-9	Document
Consumable itemsS-8	jam12-4
Control panel, overview 1-2	Dual Access6-9
Copy	E
brightness10-11	_
colour adjustment 10-17	ECM (Error Correction Mode)
contrast10-16	1-8
default settings10-16	Entering text4-3
Enlarge/Reduce10-7	Envelopes 2-4, 2-6
enter Copy mode10-1	Error messages on LCD12-1
keys10-4	Check Paper12-1
Page layout10-14	Comm.Error12-1


Ink Empty 12-2	overseas6-13
Not Registered 6-2	Real Time Transmission
Out of Memory 12-3	6-9
while scanning a document	redialling7-7
10-3	resolution6-7
Extension telephone, using 5-9	Fax/Tel mode5-1
External telephone 1-9	answering at extension
·	phones5-9
F	double-ringing (voice calls)
Fax codes	5-4
Fax Receive Code 5-9	Fax Receive Code5-9
Remote Access Code 8-3	receiving faxes5-9
Telephone Answer Code 5-9	Setting F/T Ring Time 5-4
Fax Detect 5-5	Setting Ring Delay5-3
Fax Forwarding	Telephone Answer Code 5-9
changing remotely 8-5, 8-6	
Fax Storage 8-2	G
Backup Print 8-2	Gray scale S-4, S-5
printing from 5-8	Groups for Broadcasting 7-4
turning on 8-2	-
Fax, stand-alone	Н
receiving5-1	HELP
at end of conversation 5-7	Help List9-3
difficulty 12-8	navigation keys3-2
forwarding8-5	-
reducing to fit on paper 5-7	I
retrieving from a remote	Ink cartridges
site 8-6	checking ink volume 12-14
Ring Delay, setting 5-3	replacing 12-20
sending 6-1	Ink Dot Counter 12-22
at end of conversation 6-5	
Broadcasting 6-12	L
cancelling from memory	LCD (liquid crystal display)
6-11	1-4
colour fax6-8	
contrast 6-6	M
delayed 6-14	Maintenance, routine 12-18
from memory (dual access)	Manual
6-9	receive5-1
manual transmission 6-4	transmission6-4


Manual Dialling7-8	R
Memory Storage3-1	Receive mode
Menu selection table3-1	External TAD5-1
Multi-line connections (PBX)	Fax Only5-1
1-13	Fax/Tel5-1
	Manual5-1
0	Redial/Pause6-8
One Touch numbers	Reducing
storing7-1	copies10-7
Options key (copying)	long faxes5-7
Brightness10-11	Remote Retrieval8-4
Paper Size10-10	access code 8-3, 8-4
Paper Type10-9	commands8-5
1 21	getting your faxes8-6
Р	Reports9-1
Paper2-3, S-3	How to print9-3
capacity2-4	Transmission Verification9-1
jam12-5	Resolution
Type4-6	fax (standard, Fine, superFine,
Phone line	Photo) S-4
connections1-11	print S-6
difficulties12-9	Scan S-5
multi-line (PBX)1-13	setting for next fax6-7
Power	Ring Delay, setting5-3
failure3-1	Timig Boldy, Solling
Print	S
area2-6	Safety Instructionsii, 11-2
difficulty12-8	Setup
fax from memory5-8	Date and Time4-1
Improving quality12-11	Station ID (fax header)4-2
jam12-5	Shipping the machine12-15
report9-3	Sockets
resolutionS-6	EXT. socket
specificationsS-6	external telephone1-9
Pulse (dialing)4-4	TAD (answering machine)
-	1-10
Q	Speed Dial1-4
Quality key (copying) 10-4	storing7-1
, , , , , , , , , , , , , , , , , , , ,	

TAD (Telephone Answering Device), external 1-10, 5-1 connecting 1-9 Receive Mode 5-1 Telstra® FaxStream® Duet 6-22
Temporary Copy Settings 10-4 Text, entering
Troubleshooting
print quality 12-11 TX Lock 6-17, 6-18, 6-19
V
Volume, setting 4-7 beeper 4-7 ring 4-7 speaker 4-8

Remote Retrieval Access card

If you plan to receive fax messages while away from your machine, carrying the Remote Retrieval Access Card printed below will serve as a convenient reminder of the retrieval procedures. Simply cut out the card and fold it to fit your wallet or organizer. Keeping it handy will help you derive the full benefit of your machine's Forwarding and Remote Retrieval features.

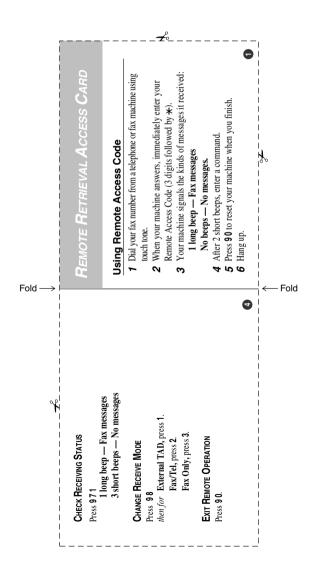

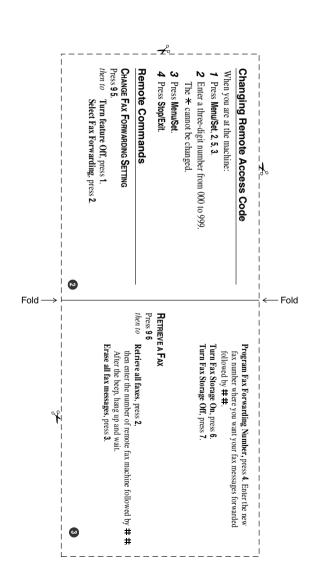



This machine is approved for use in the country of purchase only, local Brother companies or their dealers will only support machines purchased in their own countries.