

# **Battery Eliminator Kit User's Guide**

PA-BEK-001CG/WR

#### Introduction

#### **Important Notice**

- The contents of this document and the specifications of this product are subject to change without notice.
- Brother reserves the right to make changes without notice in the specifications and materials contained herein and shall not be responsible for any damages (including consequential) caused by reliance on the materials presented, including but not limited to typographical and other errors relating to the publications.
- Before using the printer and the Battery Eliminator Kit, make sure you read all the documents included with them for information about safety and operation.
- The printer shown in the illustrations may be different from your printer.
- Use the Battery Eliminator Kit only with printers that have firmware version 1.20 or later.

#### Symbols Used in This Guide

The following symbols are used throughout this guide:

A	CAUTION	Failure to observe instructions and warnings could result in minor or moderate injuries.  Follow these guidelines to avoid injury.
0	Important	Indicates information or directions that should be followed. Ignoring them may result in damage or failed operations.
	Note	Indicates notes that provide information or directions that can help you better understand the product and use it more efficiently.

#### **Important Safety Instructions**

#### **A** CAUTION

Brother is not liable for damage to any equipment caused by improper installation of this equipment to any power source.


#### Important

- The Battery Eliminator Kit must be securely installed and NEVER installed where it may come in close contact with the vehicle operator or passenger.
- DO NOT use the printer while driving, otherwise this may result in property damage or personal injury.
- Ensure the power cables are correctly connected before applying power. Incorrectly connected power cables can cause serious injuries and damages.


İ

### Install the Dummy Battery Pack

1 Unlock and pull out the printer's battery cover.



2 Insert the Dummy Battery Pack assembly until it locks into place.




#### 1 Dummy Battery Pack



DO NOT lose the battery cover as you will need to reattach it later.

3 Connect the Joint Cable of the Power Adapter (2) and the Power Cable of the Dummy Battery Pack (3) until they lock into place.



- 1 Power Adapter
- 2 Joint Cable (Output)
- 3 Power Cable (Input)




The plugs are polarized to ensure correct installation. They can only be connected one way. DO NOT attempt to force a connection.

## Connect the Battery Eliminator to the Vehicle Power Supply

Connect the Battery Eliminator to your vehicle's 12 V DC power socket (cigarette lighter or similar).

1 Connect the Cigarette Socket Adapter or the Bare Wire Connector into the vehicle's 12 V DC power socket.

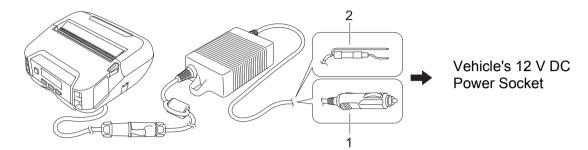


- 1 Cigarette Socket Adapter
- 2 Bare Wire Connector



If installing the Bare Wire Connector type, follow good wiring practices and connect it to a fused connection point on the vehicle electrical fuse block. The positive lead (red wire) contains the fuse holder.

2 Check that the LED indicator of the Power Adapter is lit in green.



#### 1 LED Indicator



If the LED is lit in red:

- a) Disconnect the printer from the power supply.
- b) Turn off the vehicle power.
- c) Reconnect the printer to the power supply.

If the LED color is still red, contact your local Brother dealer.

Connect the Battery Eliminator to the Vehicle Power Supply

3 Turn on the printer. The connection icon appears on the printer's LCD when the Battery Eliminator is connected.



- 4 Install the correct media in the printer.
- 5 Press the **Feed** button to check that the printer is correctly connected and the media has been correctly installed.



The printer can print only if the vehicle power is on.

