
brother

Before you can use the MFC, you must set up the hardware and install the driver. Please read this "Quick Setup Guide" for proper set up and installation instructions.



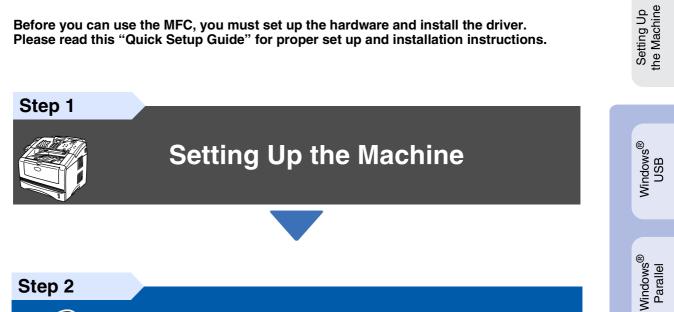

Installing the Driver & Software

Setup is Complete!

For the latest drivers and to find the best solution for your problem or question, access the Brother Solutions Center directly from the driver or go to http://solutions.brother.com Keep this "Quick Setup Guide", User's Guide and supplied CD-ROM in a convenient place for quick and easy reference at all times.


Windows NT[®] 4.0 Parallel

Windows[®] Network


Macintosh[®] USB

Macintosh[®] Network

Installing the Driver & Software

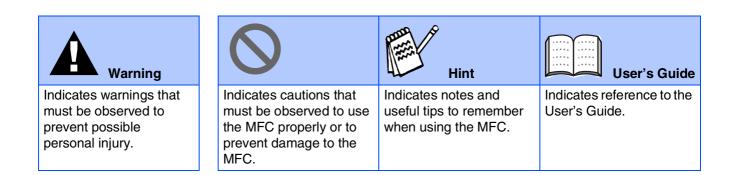

Getting Started

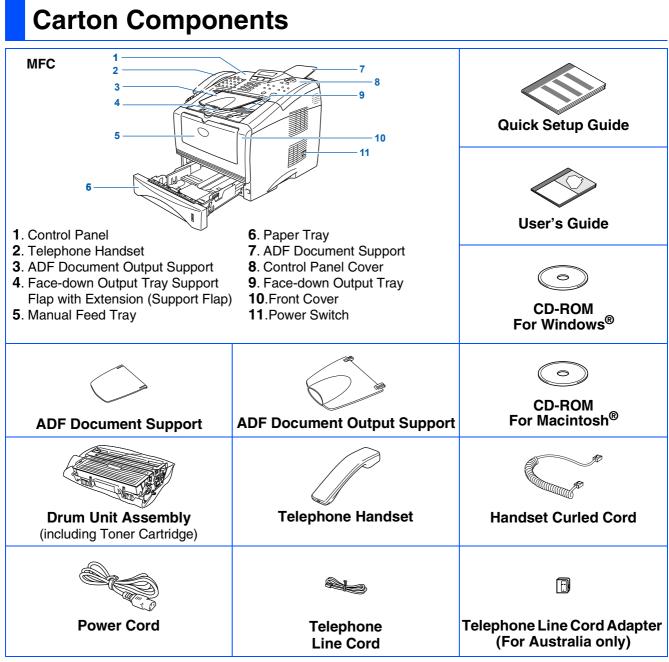

Carton components may differ from one country to another. Save all packing materials and the carton.




The interface cable is not a standard accessory. Please purchase the appropriate interface cable for the interface you intend to use (Parallel or USB).

■ For Parallel use a bi-directional shield interface cable that is IEEE 1284-compliant, and not longer than 2 meters.

■ For USB: use a Hi-Speed USB 2.0 interface cable that is not longer than 2 meters.

- Please make sure that you use a Hi-Speed USB 2.0 certified cable if your computer uses a Hi-Speed USB 2.0 interface.
- Even if your computer has a USB 1.1 interface, you can connect the MFC.

Control Panel

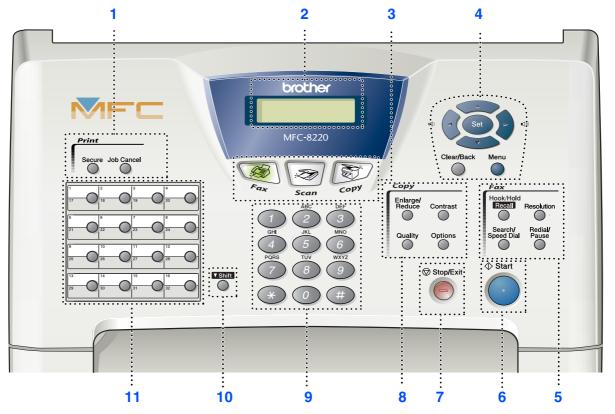

1. Print keys	5. Fax and telephone keys	9. Dial Pad
2. Liquid Crystal Display (LCD)	6. Start	10. Shift
3. Mode keys	7. Stop/Exit	11 . One-Touch keys
4. Navigation keys	8. Copy keys (Temporary Settings)	



For the details of the control panel, see "Control panel overview" in Chapter 1 of the User's Guide.

Setting Up the Machine Step 1

1	Attaching the Supports	4
	Installing the Handset	
	Installing the Drum Unit Assembly	
	Load Paper in the Paper Tray	
	Installing the Power Cord and Phone Line	
	Set Your Country (For Australia / New Zealand Customer Only)	
	Setting the Date and Time	
8.	Setting Your Station ID	10
	Selecting a Receive Mode	

Installing the Driver & Software Step 2

	Supplied CD-ROM (MFL-Pro Suite) For USB Interface Cable Users	12
	(For Windows [®] 98/98SE/Me/2000 Professional/XP)	14
	■ For Windows [®] 98/98SE/Me Users Only	17
	 ■ For Windows[®] 98/98SE/Me Users Only ■ For Windows[®] 2000 Professional Users Only ■ For Windows[®] XP Users Only 	19
R	■ For Windows [®] XP Users Only	23
٧S	For Parallel Interface Cable Users	
Windows®	(For Windows [®] 95/98/98SE/Me/2000 Professional/XP)	26
in	■ For Windows [®] 95/98/98SE/Me Users Only	
3	 ■ For Windows[®] 2000 Professional Users Only ■ For Windows[®] XP Users Only 	31
	■ For Windows [®] XP Users Only	35
	For Windows NT [®] Workstation Version 4.0 Users	38
	For Optional NC-9100h Network Interface Users	
	(For Windows [®] 95/98/98SE/Me/NT/2000 Professional/XP)	41
2	For USB Interface Cable Users	
sh	■ For Mac OS [®] 8.6 to 9.2	46
to	■ For Mac OS [®] X 10.1/10.2.1 - 10.3 or greater	48
$Macintosh^{\mathbb{R}}$	For Optional NC-9100h Network Interface Users	50
lac	■ For Mac OS [®] 8.6 to 9.2	50
2	■ For Mac OS [®] X 10.1/10.2.1 - 10.3 or greater	52

For Administrators

Network User's Guide Chapter Map (NC-9100h)	.54
Installing the BRAdmin Professional Configurátion Utility (Windows [®] Users Only)	
(Windows [™] Users Only)	.55
Web BRAdmin	.55
Setting your IP Address, Subnet Mask and Gateway using BRAdmin Professional (Windows [®] Users Only)	
(Windows [®] Users Only)	.56
Options	
Replacement Consumables	

Setting Up the Machine

1 Attaching the Supports




Step 1


DO NOT connect the interface cable. Connecting the interface cable is done when installing the driver.




1 Attach the ADF document support.

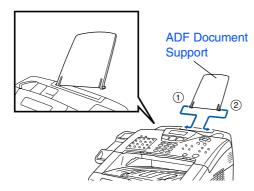

2 Open the control panel cover by lifting it toward the back.

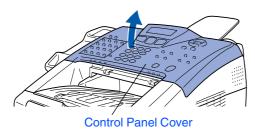




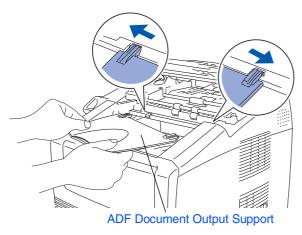


4 Close the control panel cover.


2 Installing the Handset

1 Connect the curled handset cord to the MFC and the other end to the handset.

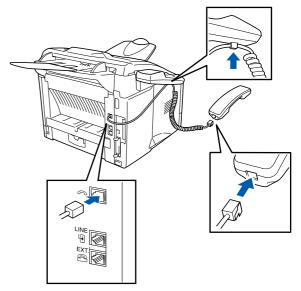

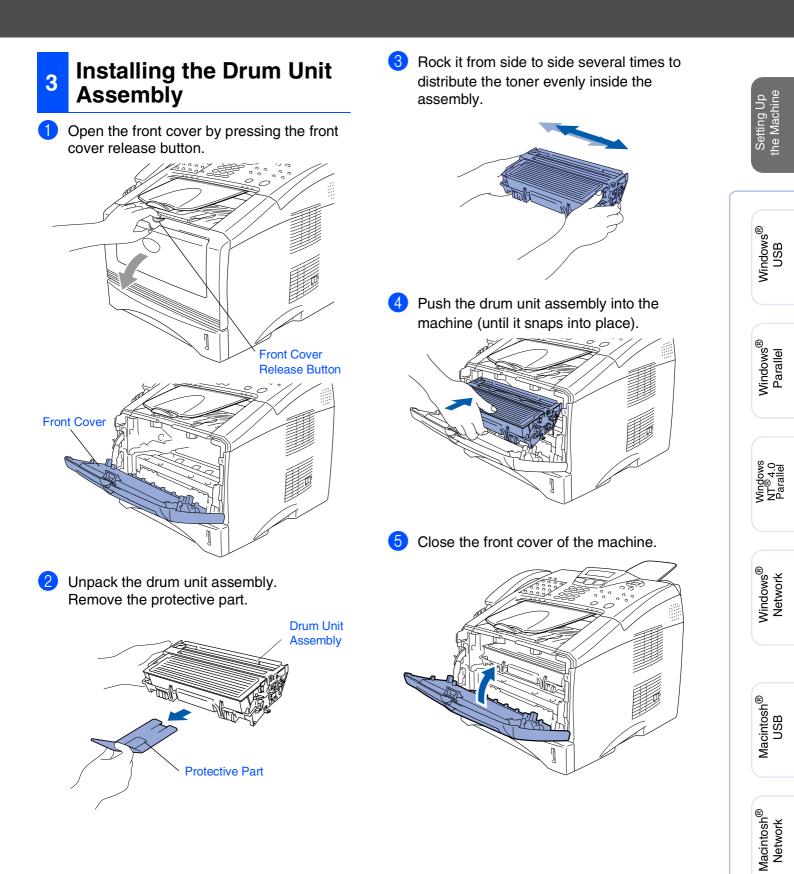


Step 1 Setting Up the Machine

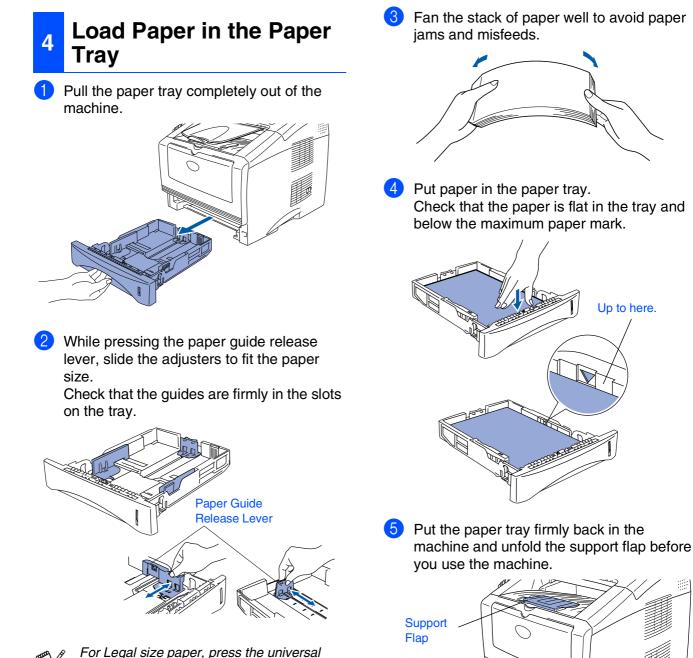

For guid

For Legal size paper, press the universal guide release button and pull out the rear of the paper tray.

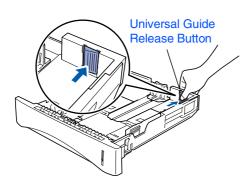

For details on supported paper specifications, see "About paper" in Chapter 2 of the User's Guide.





<u>ه</u> م

Windows NT[®] 4.0 Parallel

Windows[®] Network




5

Installing the Power Cord and Phone Line


 \bigcirc

DO NOT connect the Parallel or USB cable yet.


Make sure that the power switch is off. Connect the power cord to the MFC.

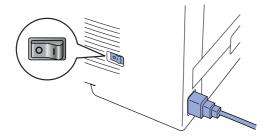

2 Plug the power cord into an AC outlet. Turn the power switch on.



3 Connect one end of the telephone line cord to the socket on the MFC marked LINE and the other end to a modular wall socket.

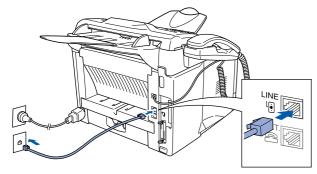


A Warning

- The MFC must be grounded using a 3-prong plug.
 Since the MFC is grounded through the power
- Since the MFC is grounded through the power outlet, you can protect yourself from potentially hazardous electrical conditions on the telephone network by keeping the power switched on when you connect it to a telephone line. Similarly, you can protect yourself when you want to move your MFC by disconnecting the telephone line first and then the power cord.



If you are sharing one phone line with an external telephone, connect it as shown below.

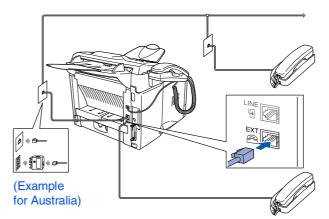


If you are sharing one phone line with an external telephone answering device, connect it as shown below.




Please set the receive mode to External TAD.

For more details, see "Connecting the MFC" in Chapter 1 of the User's Guide.

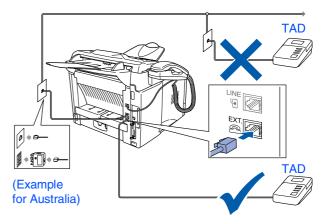

Step 1 Setting Up the Machine

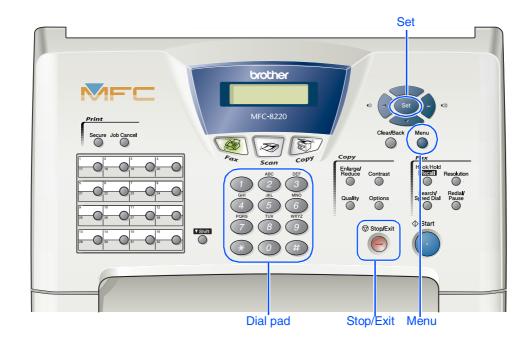

6 Set Your Country (For Australia / New Zealand Customer Only)

You must set your country so that the MFC works correctly on local telecommunication lines in each country.

 Check that the power is turned on by plugging in the power cord and turn the power switch on.

Press Set.

Set Country Press Set Key

Press or to select the country (AUSTRALIA or NEWZEALAND).



3 Press **Set** when the LCD shows your country.

4 The LCD prompts you to make sure of the country again.

Australia? 1.Yes 2.No

5 If the LCD shows the correct country, press1 to go to Step 6.

-OR-

Press **2** to go back to Step **1** to select the country again.

6 After the LCD shows Accepted for two seconds, it shows Please Wait.

Accepted

7	Setting the Date and Time		
	MFC displays the date and time, and prints it on y fax you send.	6 Enter the two digits for the day on the dial pad, and then press Set.	Setting Up the Machine
1	Press Menu.	Date/Time	Sett the N
2	Press O.	Day:01	
3	Press 2.	(e.g. Enter 0 , 1 .)	
4	Enter the last two digits of the year on the dial pad, and then press Set .	7 Enter the time in 24-hour format on the dial pad, and then press Set .	ws® B
	Date/Time Year:200 <u>4</u>	Date/Time Time:15:2 <u>5</u>	Windows [®] USB
	(e.g. Enter 0 , 4 for 2004.)	(e.g. Enter 1, 5, 2, 5 for 3:25 P.M.)	
5	Enter the two digits for the month on the dial pad, and then press Set .	8 Press Stop/Exit.	ws [®]
	Date/Time Month:0 <u>3</u>	If you want to repeat from step1, press Stop/Exit .	Windows [®] Parallel
	(e.g. Enter 0 , 3 for March.)		
			Windows NT [®] 4.0 Parallel

Windows[®] Network

Macintosh[®] USB

Macintosh[®] Network

For Administrators


Step 1 **Setting Up the Machine**




Setting Your Station ID 8

You should store your name and fax number to be printed on all fax pages that you send.

- Press Menu.
- Press (
 - Press (3
- 4 Enter your fax number (up to 20 digits) on the dial pad, and then press Set.



5 Enter your telephone number (up to 20 digits) on the dial pad, and then press Set. (If your telephone number and fax number are the same, enter the same number again.)



6 Use the dial pad to enter your name (up to 20 characters), and then press Set.

> Station ID Name:_



- Refer to the following chart for entering your name.
- If you need to enter a character that is on the same key as the previous character,

press b to move the cursor to the right.


Press	One	Two	Three	Four
key	time	times	times	times
2	Α	В	С	2
3	D	E	F	3
4	G	Н	I	4
5	J	K	L	5
6	М	Ν	0	6
7	Р	Q	R	S
8	Т	U	V	8
9	W	Х	Y	Z



For more details, see "Setting the Station ID" in Chapter 4 of the User's Guide.



Press Stop/Exit.

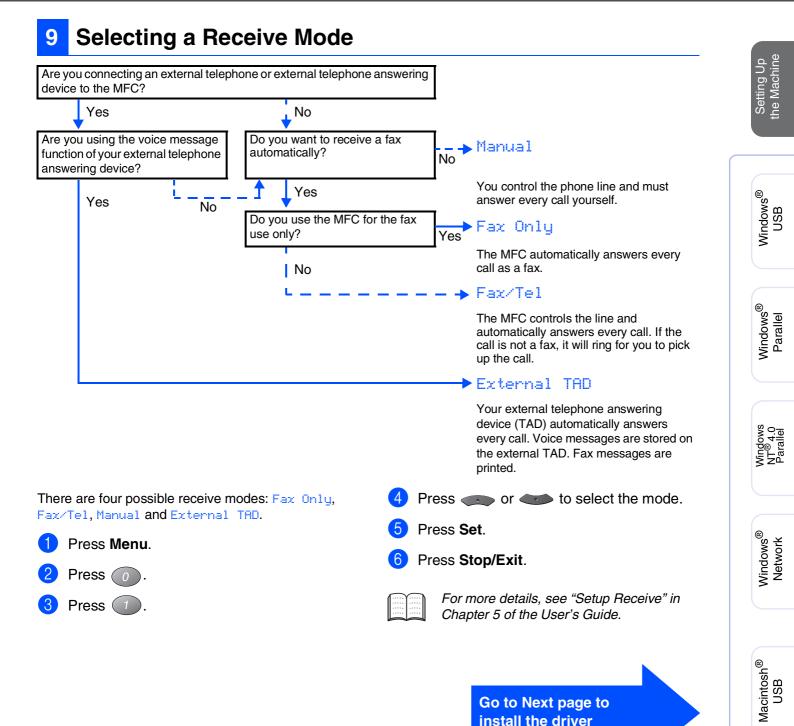

install the driver

Macintosh[®] Network

For Administrators

Supplied CD-ROM (MFL-Pro Suite)

You can find a variety of information on the CD-ROM.

Windows®



Macintosh®



Install Software

You can install the printer, PC-FAX Send/Receive, scanner drivers and the various utility items, including PaperPort[®] and TextBridge[®] OCR.



On-Line Registration

You will be pointed to the Brother Product Registration Web Page for quick registration of your MFC (Internet access required).

Documentation

View the User's Guide and other documentation in PDF format (Viewer included).



Brother Solutions Center

View contact information for Brother Customer Service and how to locate a Brother Authorized Service Center.



Start Here (Mac OS[®] 8.6 - 9.2)

You can install the printer driver, scanner driver, PC-FAX Send and Presto![®] PageManager[®] for Mac OS[®] 8.6 - 9.2.



Start Here OSX

You can install the printer driver, scanner driver, PC-Fax Send, remote setup program and Presto!® PageManager[®] for Mac OS[®] 10.1/10.2.1 - 10.3 or greater (Scanning is not supported in Mac OS[®] 10.1).

ReadMe!

You can get important information and troubleshooting tips.



Documentation

View the User's Guide and other documentation in PDF format.




Brother Solutions Center

You can access the Brother Solutions Center which is a Web site offering information about your Brother product including FAQs, User's Guides, Driver updates and Tips for using your machine (Internet access required).

On-Line Registration

You will be pointed to the Brother Product Registration Web Page for quick registration of your MFC (Internet access required).

Follow the instructions on this page for your operating system and interface cable.

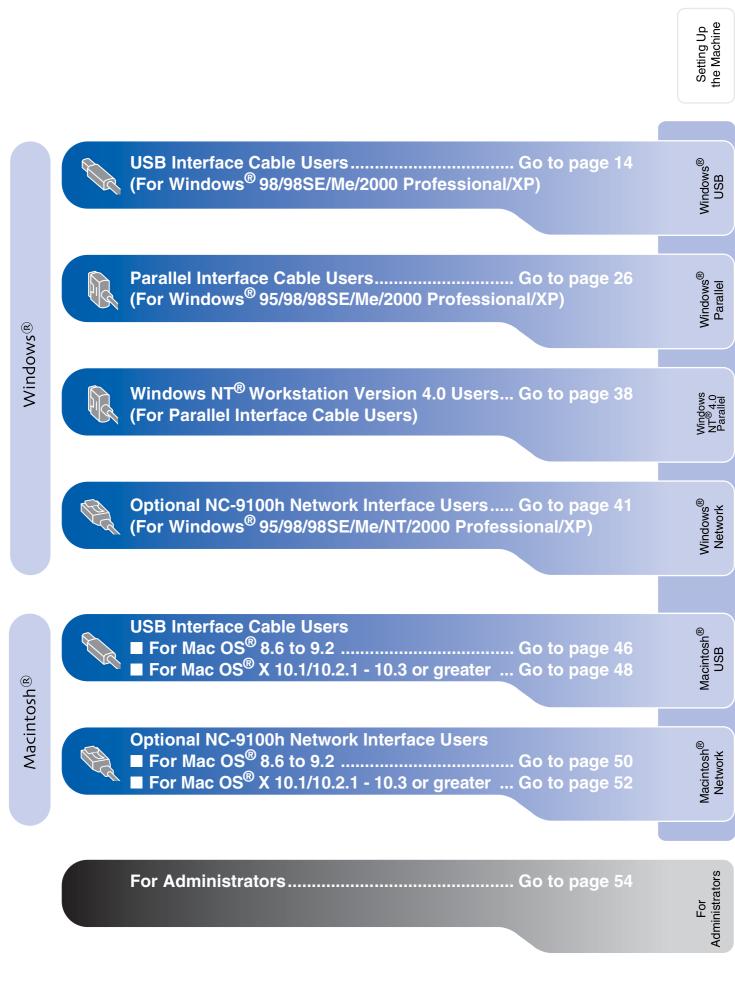

For USB Interface Cable Users (For Windows[®] 98/98SE/Me/2000 Professional/XP)

the Machine" on pages 4 - 11. Switch off and unplug the MFC from the AC outlet and disconnect it from your computer, if you already connected an interface cable. Turn on your computer.

Make sure that you have completed the instructions from Step 1 "Setting Up

(For Windows[®] 2000 Professional/XP, you must be logged on as the administrator.)

3 Insert the supplied CD-ROM for Windows[®] into your CD-ROM drive. If the language screen appears, select your language.



The CD-ROM main menu will appear. Click Install Software.






If this window does not appear, use Windows[®] Explorer to run the setup.exe program from the root directory of the Brother CD-ROM.

Click MFL-Pro Suite in Main Application.

prother	Install Software	
fain Menu	To install a software application click on the bar for that application. For operations and detailed information, click the "7" toon.	
nstal Software	Main Application MFLPro Sute	
	Optional Applications Network Applications for Optional NC-9100h	
Back	When you instal MFL-Pro Suber the Printer Driver, Scenner Driver, PC for	

MFL-Pro Suite includes Printer Driver, Scanner Driver, ScanSoft[®] PaperPort[®], ScanSoft[®] TextBridge[®], PC-FAX software, Remote Setup and TrueType fonts. PaperPort[®] is a document management application for viewing scanned documents. ScanSoft[®] TextBridge[®], which is integrated into PaperPort[®], is an OCR application that converts an image into text and inserts it into your default word processor.







If you see the following screen, click OK to install the Windows® updates. After the updates are installed your PC may restart. If it does the installation will automatically continue.

185132	<u>^</u>
⚠	Some Windows updates need to be installed before the MFL-Pro Suite installation. To install the updates click OK.
	If prompted, click OK to complete installation.
	Note: The PC may restart. If it does the installation will come us automatically.

If the installation does not continue automatically, please open the installer menu again by double-clicking the setup.exe program from the root directory of the Brother CD-ROM, and continue from Step 4.

When the **PaperPort 8.0 SE Setup** window is displayed, click **Next**.



8 After reading and accepting the ScanSoft[®] License Agreement, enter your user information and click **Next**.

perPort 8.0 SE Setup	PaperPort 8.0 SE Setup
Agreement	User Information
read the following license agreement carefully.	_
ScanSoft 🗧	Liser Name: booccos
End-User License Agreement	Organization:
TWARE AND MATERIALS PROVIDED WITH THIS AGREEMENT ARE LICENSED,	p0000000
), AND AVAILABLE FOR USE ONLY UNDER THE TERMS OF THIS LICENSE NT. PLEASE READ THIS AGREEMENT CAREFULLY, BY DOWNLOADING,	
COPYING, OR OTHERWISE USING THE SOFTWARE, YOU AGREE TO BE HE TERMS AND CONDITIONS OF THIS AGREEMENT AND BECOME A PARTY CONTUNE AND DO NOT A COTE WITH A U. OF THE TERMS AND A	Install this program for:
of the terms in the license agreement	Anyone who uses this computer (all users) Only for me (crocococ)
< Back Next > Cancel	- Scantelt
Contra Contra	CBDA U N

Select Typical and click Next.

9




10 Click Install and PaperPort[®] will start installing on your computer.



11 When the **PaperPort 8.0 SE Registration** screen is displayed, make your selection and follow the on-screen instructions.

Please take a moment to register your product	
- Register now Visithe Internet	
Remind me in 7 days	
	Registe now



(13) When the Brother MFL-Pro Suite

😰 PaperPort 8.0 SE Setu	p 🞽 🎽
A	Install Completed
ScanSoft"	PaperPort 8.0 SE has been installed. Click Finish to exit the installation wizard.
38°	Please read the Release Notes for information about using Paperfort with your particular environment. If you are uppradrup, be sure to mad the Release Notes to herm about the changes and new features in this release.
	< Back Finish Cancel



If an error message appears at this point in the installation process, or if you have previously installed the MFL-Pro Suite, you will first have to uninstall it. From the **Start** menu, select **All Programs**, **Brother**, **MFL-Pro Suite MFC-8220**, **UnInstall**, and then follow the instructions on the screen.

Continued...

For USB Interface Cable Users (For Windows[®] 98/98SE/Me/2000 Professional/XP)

When the Brother Software License Agreement window appears, click Yes.





15 Select Local Interface, and then click Next.

Brother MFL-Pro Suite Instal	llation 🛛 🔀
Connection Type	
Choose the setup type that bes Click the type of Setup you pre	it suits your needs. for,
⊙ Local Interface	Select if your device is connected to this computer. (for example using a USB or Parallel cable)
Network Interface	Select if your device is connected through a network.

16 Select **Standard**, and then click **Next**. The application files will be copied and installed to your computer.

Brother MFL-Pro S	uite Installation
Setup Type	
Choose the setup Click the type of S	ype that best suits your needs. etup you prefer.
 Standard 	Program will be installed with the most common options. Recommended for most users.
Custom	You may choose the options you want to install. Recommended for advanced users.
	Cancel



If you want to install the PS Brother (PostScript[®]) driver, select **Custom** and then follow the on-screen instructions. When the Select Components screen appears, check PS Printer Driver, and then continue following the on-screen instructions.

Windows [®] 98/98SE/Me Users → Go to page 17	
Windows [®] 2000 Professional Users	
→ Go to page 19 Windows [®] XP Users	
→ Go to page 23	

For Administrators

For Windows[®] 98/98SE/Me Users Only

17 When this screen appears, connect the

Make sure that you followed the instructions in (1) to (6) on pages 14 - 16.

USB interface cable to your PC, and then connect it to the MFC. Plug the MFC into the AC power outlet. Turn the power switch on. ther MFC-8220 USB Prin Brother MFL-Pro Suite Connect the machin Plug in the Parallel cable: the PC and the r Connect the Parallel cable to the PC and the machine.
 Switch the machine on.
 Click the Next button, and then click Finish to restart your PC 4. After the PC restarts, Please wait until the installation is completed. Plug in the USB cable 1. Connect the USB cable to the PC a 2. Switch the machine on. 3. When prompted select BRUSB port. Next > Cancel 0 ther MFC-8220 USB Pr 17 It will take a few seconds for the installation screen to appear. Yes <u>N</u>o The installation of the Brother drivers will


automatically start. Follow the instructions on the screen. Select BRUSB: USB Printer Port, and then

click Next.

18



19 Accept the default Printer name by selecting Yes. and then click Next.



Select Yes (recommended), and then click Finish. A test page will be printed so you can check the print quality.

 After your printer is installed, Windows can print a test page so you can confirm that the printer is set up properly.
Would you like to print a test page?
 ° No
< Back Finish Cancel

If the test page is printed correctly, click Yes. If you click No, follow the prompts on the screen to correct the problem.





If the README file shown in step 22 appears, close the README.WRI file and then click Finish after printing the page.



For USB Interface Cable Users (For Windows[®] 98/98SE/Me/2000 Professional/XP)

<text></text>	After the computer restarts, click Yes to have the Control Center load each time Windows [®] is started. The Control Center will appear as an icon in the task tray. If you click No the Scan key on the MFC will be disabled. In the transmission of the Brother MFL Pro Centre Center automatically bidded when you reboard your system?
<text><text><text><text><image/></text></text></text></text>	 If you checked the box in step 28, the screen for On-Line Registration will appear. Please complete your registration. Even if you select No, you will be able to launch the Brother Control Center later to use the Scan key by double-clicking the SmartUI icon on the desktop. This loads the Brother Control Center to the task tray. See AutoLoad the Brother Control Center, Chapter 4 in the Documentation (Software User's Guide) located on the CD-ROM.
<text><text><image/></text></text>	The Brother PC-FAX, Printer and Scanner drivers have been installed and the installation is now complete.


For Administrators

Setting Up the Machine

For Windows[®] 2000 Professional Users Only

Make sure that you followed the instructions in (1) to (6) on pages 14 - 16.

17 When this screen appears, connect the 19 The README file will be displayed. USB interface cable to your PC, and then Please read this file for troubleshooting connect it to the MFC. information and then close the file to Plug the MFC into the AC power outlet. Turn continue installation. the power switch on. 1 ala m 🗉 Connect the machine BROTHER MFL-Pro SUITE IS FILE CONTAINS IMPORTANT UPDATE INFORMATIN RINT A COPY OF THIS FILE AND REEP IT WITH YOUR Plug in the Parallel cable: 1. Connect the Parallel cable to the PC and the machine. 2. Switch the machine on. 3. Click the Next button, and then click Finish to restart your PC, 4. After the PC restarts, Please wait until the installation is comple Plug in the USB cable 1. Connect the USB cable to the PC and the 2. Switch the machine on. Next > Cancel Check the Run On-Line Registration and then click Next. Brother MEL-Pro Suite Inst Run On-Line Registration Ne 0 Click Finish to restart your computer. ₹. 17 It will take a few seconds for the installation screen to appear. The installation of the Brother drivers will automatically start. Follow the instructions on the screen. 18 If the Digital Signature Not Found dialog Continued... boxes appear, click Yes to install the driver.



For USB Interface Cable Users (For Windows[®] 98/98SE/Me/2000 Professional/XP)

After the computer restarts, click Yes to have the Control Center load each time Windows[®] is started. The Control Center will appear as an icon in the task tray. If you click No the Scan key on the MFC will be disabled.

SmartUI	×
?	Would you like the Brother MFL Pro Control Center automatically loaded when you reboot your system?
	If you select No, the 'Scan to File' and 'Scan to Email' buttons will be disabled.
	Yes No



If you checked the box in step 20, the screen for On-Line Registration will appear. Please complete your registration.

- Even if you select No, you will be able to launch the Brother Control Center later to use the Scan key by double-clicking the SmartUI icon on the desktop. This loads the Brother Control Center to the task tray. See AutoLoad the Brother Control Center, Chapter 4 in the Documentation (Software User's Guide) located on the CD-ROM.
- A Basic Universal printer driver was installed with the MFL-PRO Software Suite which is certified for use with Windows[®] operating systems.

Brother also offers a fully featured printer driver (Native driver) that includes more features than the Basic Universal driver. However, this driver does not include a Windows[®] certificate. To install the Brother Native driver proceed to step ⁽²⁾/₍₂₎.



For details on what features are available, see chapter 2 of the Software User's Guide.

Brother Native driver Installation

Click Start, select Settings and then Printers. Click on Add Pinter and the Add Printer Wizard will start.

When this screen appears, click Next.




24 Un-check the Automatically detect and install my Plug and Play printer selection and then click Next.

Local or	Network Printer				A
	printer attached to y	our computer?			Ś
	minter is directly atta er computer, or direc				ached to
⊙Lo	cal printer				
	Automatically dete	ct and install my	Plug and Play pr	nter	
C Ng	twork printer				
			< Back	Next >	Cancel

Select **USBXXX** from the pull down window for the Printer Port Selection and then click **Next**.

			ugh ports.	
Select		ou want your printer to us	e. If the port is not listed, y	ou can create a
		wing port:		
F	Port	Description	Printer	-
c	OM3: OM4: ILE:	Serial Port Serial Port Print to File		
	SRXXX MFC:	Virtual printer port for Brother MFL Port	Brother MFC-8220	-
No	ite: Most i	computers use the LPT1: p	oort to communicate with a	local printer.
C <u>D</u> r	eate a nes	w port:		^
	pe:	Brother MFL Po	it	

Windows®

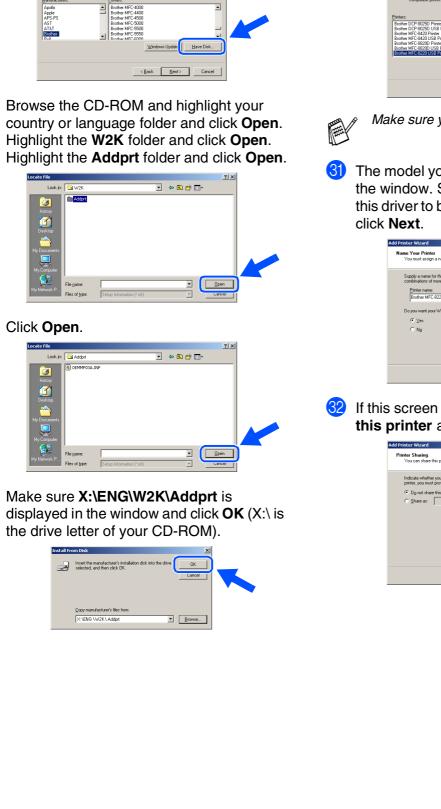

26

27

28

29

Click on Have Disk.

Add Printer Wizard The manufacturer and model det

aine which printer to use

Select the manufacturer and model of your printer. If your printer came with an installation disk, click Have Disk. If your printer is not listed, consult your printer documentation for a 30 Highlight the model you are installing from the list of machines and click **Next**.



Make sure you select a USB printer.


31 The model you are installing will be listed in the window. Select **Yes** or **No** if you want this driver to be your default printer and then click **Next**.

Name Your Printer		A
You must assign a name for t	s printer.	Ø
Supply a name for this printer, combinations of more than 31	come programs do not suppor characters.	t server and printer name
Printer name:		
Brother MFC-8220 USB F	nter	
Do you want your Windows-b	sed programs to use this print	er as the default printer?
Yes		
C No.		
C Ng		
⊂ N <u>o</u>		•
C №		<u>^</u>
© №		<u>^</u>

2 If this screen appears, select **Do not share this printer** and **Next**.

Printer Wizard Printer Sharing	6
You can share this printer with other net	work users.
Indicate whether you want this printer to printer, you must provide a share name.	be available to other users. If you share this
 Do not share this printer 	
C Share as:	
	<back next=""> Cancel</back>
	Continued

For USB Interface Cable Users (For Windows[®] 98/98SE/Me/2000 Professional/XP)



33 Select Yes and Next to print a test page.

Printer Wizard				
Print Test Page To confirm that the printer is insta	led properly, you c	an print a test pag	e 6	9
Do you want to print a test page?				
⊙ ⊻es				
⊂ N <u>o</u>				
				\checkmark
				<
		_		
	< <u>B</u>	ack <u>N</u> ext	> Cano	el
		<u> </u>		



34 When this screen appears, click **Finish**.



35 If the Digital Signature Not Found dialog box appears, click Yes.



36 If the test page printed, click OK.

A test page is now be speed of your printer, is printed.			
The test page briefly or graphics and text, and printer driver.			
If the test page printe	d, click OK.		
If the test page did no	t print, click Tro	ubleshoot.	Ň
	_		
		эк Т	ubleshoot



There will be two Brother printer drivers listed in the Printers selection. The driver with "Printer" after the model name (ex. Brother MFC-8220 Printer) is the Brother Native Driver.

OK! The Brother Native Drivers have been installed and the installation is now complete.

For Administrators

For Windows[®] XP Users Only

Make sure that you followed the instructions in (1) to (6) on pages 14 - 16.


17 When this screen appears, connect the USB interface cable to your PC, and then connect it to the MFC. Plug the MFC into the AC power outlet. Turn continue installation. the power switch on. 🛸 🖬 🚳 🖪 🖊 rother MFL-Pro Suite BROTHER MFL-Pro SUITE README FILE TAINS IMPORTANT UPD/ Y OF THIS FILE AND KEE Plug in the Parallel cable Connect the Parallel cable to the PC and th
 Switch the machine on.
 Wait for the installation process to continue. Plug in the USB cable t the USB cable to the PC and I process to continue. en and close during the in Cancel **1**9 Check the Run On-Line Registration and then click Next. **On-Line Begist** <u>N</u>ext> Click Finish to restart your computer. 20) 0 ٤. 0 N 0

It will take a few seconds for the installation screen to appear.


The installation of the Brother drivers will automatically start. The screens appear one after another, please wait for a while.







For USB Interface Cable Users (For Windows[®] 98/98SE/Me/2000 Professional/XP)

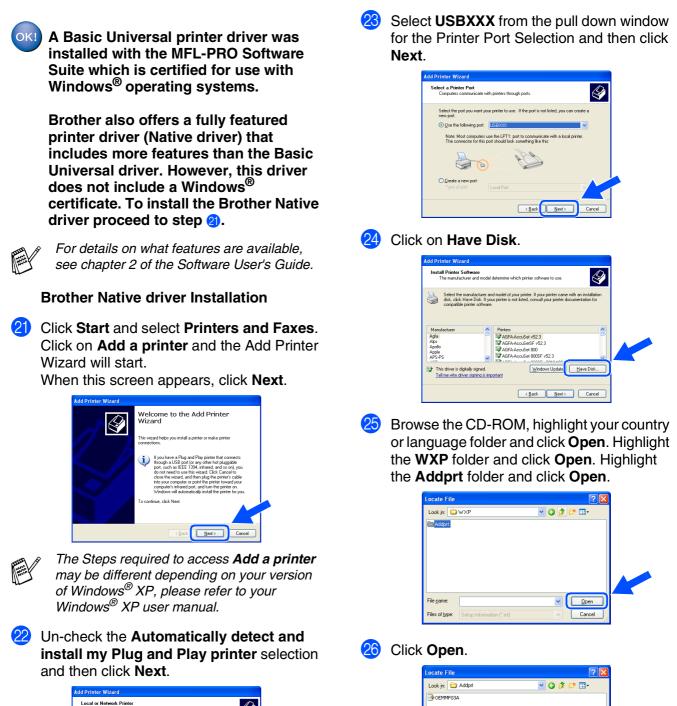

v Dpen

Cancel

File name

Files of type

d Printer Wizard	
Local or Network Printer The wizard needs to know which type of printer to set up.	Ì
Select the option that describes the printer you want to use:	
 Local printer attached to this computer 	
Automatically detect and install my Plug and Play printer	
A network printer, or a printer attached to another computer	
To set up a network printer that is not attached to a print server, use the "Local printer" option.	
< Back Next >	Cancel

Windows®






Make sure X:\ENG\WXP\Addprt is displayed in the window and click OK (X:\ is the drive letter of your CD-ROM).

Install F	rom Disk	X	
J.	Incet the manufacturer's installation disk, and then make sure that the correct dive is selected below.	Cancel	
	X:\ENG\WXP\Addpt	Browse	

Highlight the model you are installing from the list of machines and click Next.





Make sure you select a USB printer.

29 The model you are installing will be listed in the window. Select **Yes** or **No** if you want this driver to be your default printer and then click **Next**.




If this screen appears, select **Do not share** this printer and Next.

dd Printer Wizard	
Printer Sharing You can share th	s printer with other network users.
If you want to she suggested name users.	re this printer, you must provide a share name. You can use the r type a new one. The share name will be visible to other network
💿 Do not share I	his printer
O <u>S</u> hare name:	

3 Select **Yes** and **Next** to print a test page.

dd Printer Wizard			
Print Test Page To confirm that the printer is installed p	roperly, you can print a t	est page.	
Do you want to print a test page?			
⊙ Yes			
○ N ₂			
	< Back	Next >	Cancel
		TRow >	Cancel



Add Printer Wizard	
Com	pleting the Add Printer Wizard
	ve successfully completed the Add Printer Wizard. ecified the following printer settings:
Name:	Brother MFC-8220 USB Printer
Share	name: <not shared=""></not>
Port:	USB001
Model	Brother MFC-8220 USB Printer
Defaul	: No
Test pa	nge: No
To clos	re this wizard, click Finish.
	K Finish Cancel

When this screen appears, click Continue Anyway.

Hardwa	re Installation
⚠	The software you are installing for this hardware: Printers
	has not passed Windows Logo testing to verify its compatibility with Windows XP. (<u>Tell me why this testing is important</u> .)
	Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software the that passed Windows Logo testing.
	Continue Anyway STOP Installation



There will be two Brother printer drivers listed in the "Printers" selection. The driver with Printer after the model name (ex. Brother MFC-8220 Printer) is the Brother Native Driver.




The Brother Native Drivers have been installed and the installation is now complete.

For Parallel Interface Cable Users (For Windows[®] 95/98/98SE/Me/2000 Professional/XP)

Make sure that you have completed the instructions from Step 1 "Setting Up the Machine" on pages 4 - 11.

 Switch off and unplug the MFC from the AC outlet and disconnect it from your computer, if you already connected an interface cable.

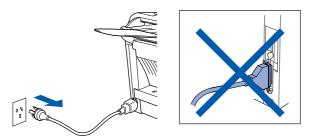

Turn on your computer. (For Windows[®] 2000 Professional/XP, you must be logged on as the administrator.)

Insert the supplied CD-ROM for Windows[®] into your CD-ROM drive. If the language screen appears, select your language.



The CD-ROM main menu will appear. Click Install Software.






If this window does not appear, use Windows[®] Explorer to run the **setup.exe** program from the root directory of the Brother CD-ROM. 5 Click **MFL-Pro Suite** in Main Application.

prother	Install Software
Main Menu	To install a software application click on the barfor that application. For operations and detailed information, click the "Pricon
Install Software	Main Application MFL-Pro State
	Optional Applications
Back	Optional Applications Network Applications for Optional NC-8100h

MFL-Pro Suite includes Printer Driver, Scanner Driver, ScanSoft[®] PaperPort[®], ScanSoft[®] TextBridge[®], PC-FAX software, Remote Setup and TrueType fonts. PaperPort[®] is a document management application for viewing scanned documents. ScanSoft[®] TextBridge[®], which is integrated into PaperPort[®], is an OCR application that converts an image into text and inserts it into your default word processor.








If you see the following screen, click **OK** to install the Windows[®] updates. After the updates are installed your PC may restart. If it does the installation will automatically continue.

INST32	X
⚠	Some Windows updates need to be installed before the MFL-Pro Suite installation. To install the updates click OK.
	If prompted, click OK to complete installation.
	Note: The PC may restart. If it does the installation will con-

If the installation does not continue automatically, please open the installer menu again by double-clicking the **setup.exe** program from the root directory of the Brother CD-ROM, and continue from Step **4**. When the **PaperPort 8.0 SE Setup** window is displayed, click **Next**.



8 After reading and accepting the ScanSoft[®] License Agreement, enter your user information and click **Next**.


🖗 PaperPort 8.0 SE Setup	🖉 PaperPort 8.0 SE Setup
License Agreement Please read the following license agreement carefully.	User Information
ScanSoft 📑	Lizer Name:
End-User License Agreement	Grganization:
The Software Add MATERIALS SPROVED WITH THE ADDEXANTLY ARE LICHED, not Sola, Add And Add Er ford is or or where the TENDE of the Lichest performance of the Add Add Add Add Add Add Add Add Add Ad	Instal this program for:
Sonfoft Cancel	Control:

Select Typical and click Next.

9




10 Click Install and PaperPort[®] will start installing on your computer.

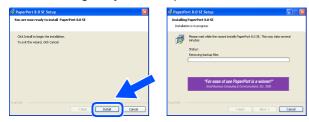


11 When the **PaperPort 8.0 SE Registration** screen is displayed, make your selection and follow the on-screen instructions.

Please take a moment to register your product	
Register now	
Tegola now	
Via the Internet	
Remind me in 7 days	
Tream of the days	



Install Completed Peperfort 8.0 % has been installed. Clok Finish to exit the installation weard. Peperfort with the Belasse Nates for Momentum educt using Apperfort with your particular environment. If you are upgrading, be sure to read the Belasse Nates to Hear about the changes and new features in the release. (Back First)	🕼 PaperPort 8.0 SE Setup	×	I
installation weard.		Install Completed	
PaperFort with your particular environment. If you are upgading to sure to read the Release Notes to low maked the changes and new features in this release.	ScanSoft"	PaperPort 8.0 SE has been installed. Click Finish to exit the installation wizard.	
< Back Finish Cancel		PaperPort with your particular environment. If you are upgrading, be sure to read the Release Notes to learn about	
		< Back Finish Cancel	






If an error message appears at this point in the installation process, or if you have previously installed the MFL-Pro Suite, you will first have to uninstall it. From the Start menu, select All Programs, Brother, MFL-Pro Suite MFC-8220, UnInstall, and then follow the instructions on the screen.

Continued...

For Parallel Interface Cable Users (For Windows[®] 95/98/98SE/Me/2000 Professional/XP)

4 When the Brother Software License Agreement window appears, click **Yes**.



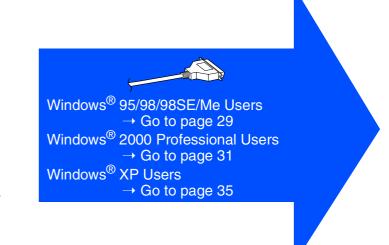

15 Select **Local Interface**, and then click **Next**.

other MFL-Pro Suite Inst	allation 🛛 🔀
Connection Type	
Choose the setup type that b Click the type of Setup you p	iest suits your needs. prefer.
⊙ Local Interface	Select if your device is connected to this computer. (for example using a USB or Parallel cable)
O Network Interface	Select if your device is connected through a network.

Select Standard, and then click Next. The application files will be copied to your computer.

Brother MFL-Pro S Setup Type	uite Installation
Choose the setup Click the type of S	type that best suits your needs. etup you prefer.
⊙ Standard	Program will be installed with the most common options. Recommended for most users.
O Custom	You may choose the options you want to install. Recommended for advanced users.



If you want to install the PS Brother (PostScript[®]) driver, select **Custom** and then follow the on-screen instructions. When the **Select Components** screen appears, check **PS Printer Driver**, and then continue following the on-screen instructions.


For Administrators

Windows[®] Parallel


Installing the Driver & Software

For Windows[®] 95/98/98SE/Me Users Only

Make sure that you followed the instructions in (1) to (6) on pages 26 - 28.

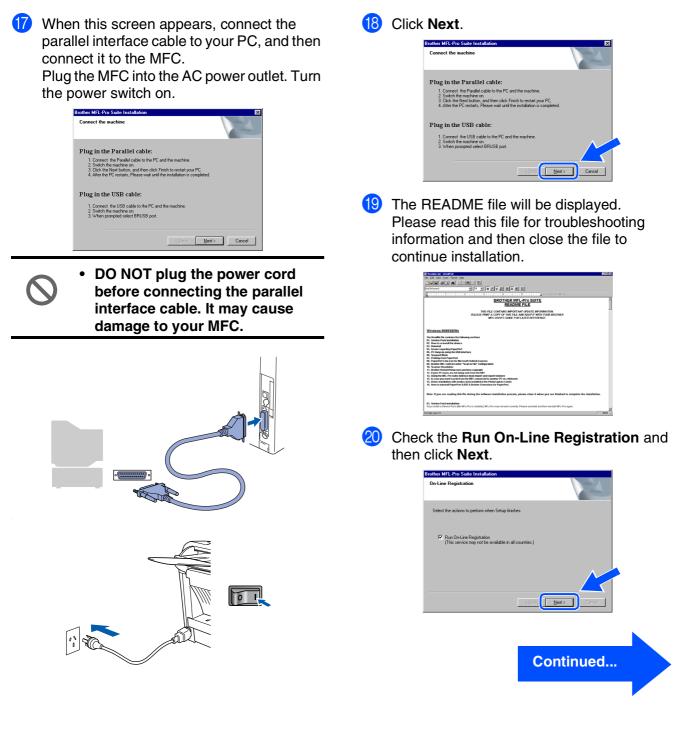

For Parallel Interface Cable Users (For Windows[®] 95/98/98SE/Me/2000 Professional/XP)





- 22 After the computer restarts, the installation of the Brother drivers will automatically start. Follow the instructions on the screen.
- Click Yes to have the Brother MFL-Pro Control Center load each time Windows[®] is started. The Control Center will appear as an icon in the task tray.

If you click **No** the Scan key on the MFC will be disabled.





If you checked the box in step 20, the screen for On-Line Registration will appear. Please complete your registration.

Even if you select No, you will be able to launch the Brother Control Center later to use the Scan key by double-clicking the SmartUI icon on the desktop. This loads the Brother Control Center to the task tray. See AutoLoad the Brother Control Center, Chapter 4 in the Documentation (Software User's Guide) located on the CD-ROM.

• The Brother PC-FAX, Printer and Scanner drivers have been installed and the installation is now complete.




Windows⁽ Parallel

Installing the Driver & Software

For Windows[®] 2000 Professional Users Only

Make sure that you followed the instructions in (1) to (6) on pages 26 - 28.

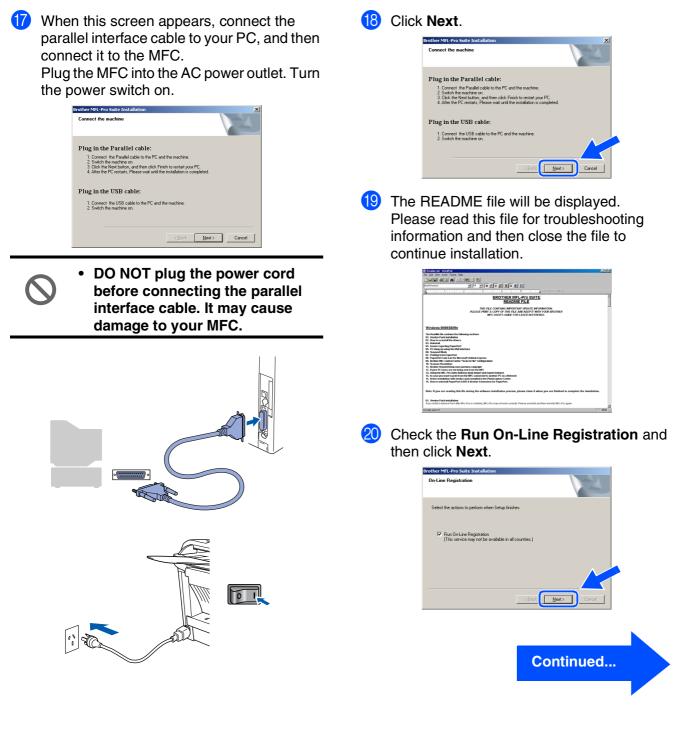

For Parallel Interface Cable Users (For Windows[®] 95/98/98SE/Me/2000 Professional/XP)



2) Click **Finish** to restart your computer.



After the computer restarts, the installation of the Brother drivers will automatically start. Follow the instructions on the screen.

If the Digital Signature Not Found dialog boxes appear, click Yes to install the driver.



Click Yes to have the Control Center loaded each time Windows[®] is started. The Control Center will appear as an icon in the task tray.

If you click **No** the Scan key on the MFC will be disabled.

nartUI	×		
?	Would you like the Brother MFL Pro Control Center automatically loaded when you reboot your system?		
	If you select No, the 'Scan to File' and 'Scan to Email' buttons will be disabled.		
	Yes No		



If you checked the box in step 20, the screen for On-Line Registration will appear. Please complete your registration.

Even if you select No, you will be able to launch the Brother Control Center later to use the Scan key by double-clicking the SmartUI icon on the desktop. This loads the Brother Control Center to the task tray. See AutoLoad the Brother Control Center, Chapter 4 in the Documentation (Software User's Guide) located on the CD-ROM. A Basic Universal printer driver was installed with the MFL-PRO Software Suite which is certified for use with Windows[®] operating systems.


> Brother also offers a fully featured printer driver (Native driver) that includes more features than the Basic Universal driver. However, this driver does not include a Windows[®] certificate. To install the Brother Native driver proceed to step ⁽²⁾/₍₂₎.



For details on what features are available, see chapter 2 of the Software User's Guide.

Brother Native driver Installation

Click Start and select Settings and then Printers. Click on Add Printer and the Add Printer Wizard will start. When this screen appears, click Next.




Un-check the Automatically detect and install my Plug and Play printer selection and then click Next.

dd Pri	nter Wizard
	al or Network Printer Is the printer attached to your computer?
	If the printer is directly attached to your computer, click Local printer. If it is attached to another computer, or directly to the network, click Network printer.
	Local printer
	Automatically detect and install my Plug and Play printer
	C Network printer
	A
	<back next=""> Cancel</back>

Windows®

Windows⁽ Parallel

Installing the Driver & Software

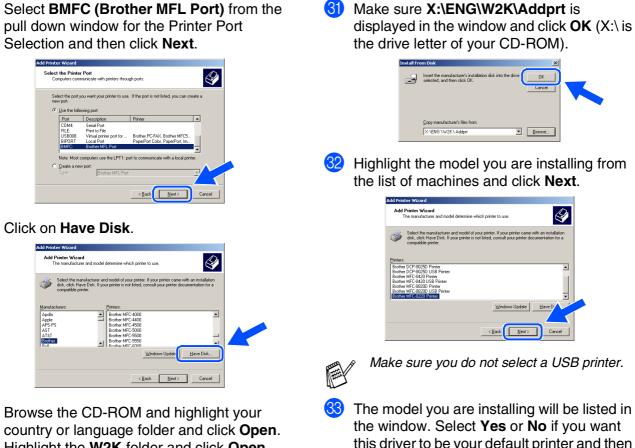


Highlight the W2K folder and click Open. Highlight the Addprt folder and click Open.



Click Open. 30


27

28

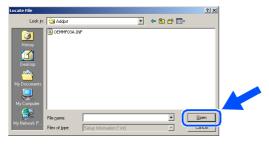


this driver to be your default printer and then click Next.

inter Wizard	
ime Your Printer You must assign a name for this printer.	Ì
Supply a name for this printer. Some programs do not support server and printer name combinations of more than 31 characters.	
Printer name:	
Brother MFC-8220 Printer	
©⊻es CNg	
	ancel



For Parallel Interface Cable Users (For Windows[®] 95/98/98SE/Me/2000 Professional/XP)

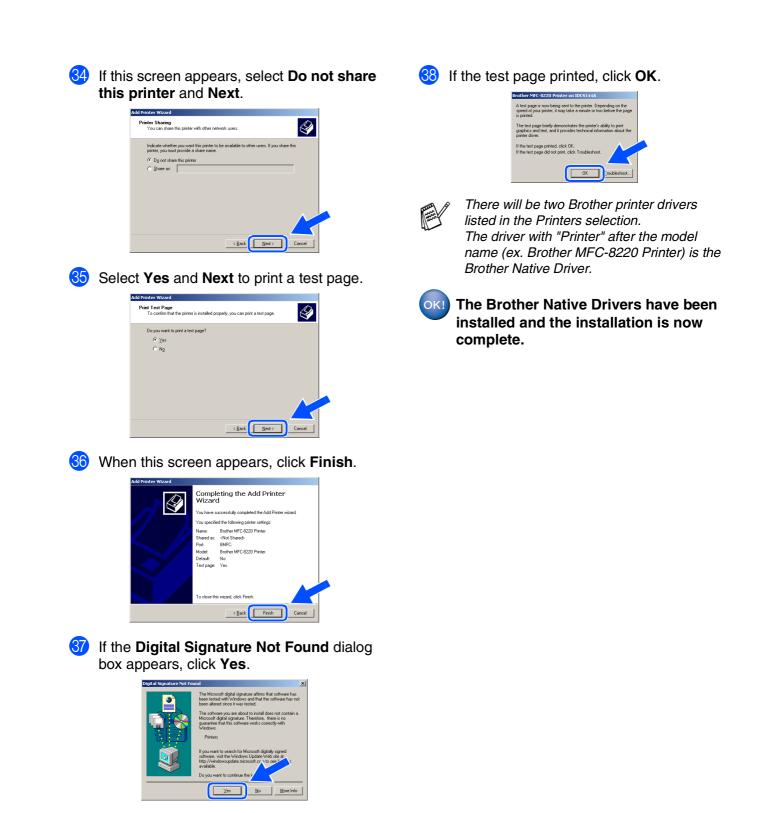

Administrators

Ĕ

Installing the Driver & Software



For Windows[®] XP Users Only

Make sure that you followed the instructions in (1) to (6) on pages 26 - 28.

(17) When this screen appears, connect the 18 The README file will be displayed. parallel interface cable to your PC, and then Please read this file for troubleshooting connect it to the MFC. information and then close the file to Plug the MFC into the AC power outlet. Turn continue installation. the power switch on. rother MFL-Pro Suite BROTHER MFL-Pro SUITE README FILE Plug in the Parallel cable Connect the Parallel cable to the PC and th
 Switch the machine on.
 Wait for the installation process to continue. Plug in the USB cable t the USB cable to the Cancel Check the Run On-Line Registration and **(19)** then click Next. DO NOT plug the power cord before connecting the parallel On-Line Regist interface cable. It may cause damage to your MFC. <u>N</u>ext> 20 When the following screen appears, click Finish and wait as the PC restarts $Windows^{\mathbb{R}}$ and continues the installation. N. The InstallShield Wizard has successfully MFL-Pro Suite. Before you can use the p Finish 0 N 0 If you checked the box in Step (19), the screen for On-Line Registration will appear after the computer restarts. Please complete your The installation of the Brother drivers will registration. automatically start. The screens appear one after another, please wait for a while.



Continued...

For Parallel Interface Cable Users (For Windows[®] 95/98/98SE/Me/2000 Professional/XP)

A Basic Universal printer driver was installed with the MFL-PRO Software Suite which is certified for use with Windows[®] operating systems.

> Brother also offers a fully featured printer driver (Native driver) that includes more features than the Basic Universal driver. However, this driver does not include a Windows[®] certificate. To install the Brother Native driver proceed to step 2.



For details on what features are available, see chapter 2 of the Software User's Guide.

Brother Native driver Installation

21 Click Start and select Printers and Faxes. Click on Add a printer and the Add Printer Wizard will start.

When this screen appears, click Next.





The Steps required to access **Add a printer** may be different depending on your version of Windows[®] XP, please refer to your Windows[®] XP user manual.

22 Un-check the Automatically detect and install my Plug and Play printer selection and then click Next.



Select BMFC (Brother MFL Port) from the pull down window for the Printer Port Selection and then click Next.

Select a Printer Port Computers communicate w	ith printers through ports.
Select the port you want yo new port.	ur printer to use. If the port is not listed, you can create a
<u>● U</u> se the following port:	BMFC: (Brother MFL Port)
Note: Most computers The connector for this	use the LPT1: port to communicate with a local printer. port should look something like this:
600	29
O <u>C</u> reate a new port: Type of port:	Local Port

24 Click on Have Disk.



Browse the CD-ROM, highlight your country or language folder and click **Open**. Highlight the **WXP** folder and click **Open**. Highlight the **Addprt** folder and click **Open**.





Look jn: 🗲	Addprt	V () () 🕑 🗔	-	
OEMMF03					
_					
File name:		~		pen	

Windows®





Print Test Page To confirm that the printer is installed pr	openly, you can print a test page.
Do you want to print a test page?	
⊙ Yes	
○ N ₂	
	<back next=""> Cancel</back>



Make sure X:\ENG\WXP\Addprt is

the drive letter of your CD-ROM).

Insert the manufacturer's insta make sure that the correct driv

X-VENBVW/XPV Adds

displayed in the window and click OK (X:\ is

Browse...

Ha

<u>N</u>ext> Can



27

Make sure you do not select a USB printer.

< Bac

29 The model you are installing will be listed in the window. Select **Yes** or **No** if you want this driver to be your default printer and then click **Next**.



30 If this screen appears, select **Do not share this printer** and **Next**.

Add Printer Wizard	
Printer Sharing You can share thi	s printer with other network users.
	te this printer, you must provide a share name. You can use the r type a new one. The share name will be visible to other network
💿 Do not share t	nis printer
<u>○</u> Share name:	

2 When this screen appears, click **Finish**.

Complet	ing the Add Printer Wizard
	ccessfully completed the Add Printer Wizard. I the following printer settings:
Name: Share name: Port: Model:	Brother MFC-8220 Printer <not shared=""> BMFC: Brother MFC-8220 Printer</not>
Default: Test page:	No No
I o close this	wizard, click Finish.

33 When this screen appears, click **Continue Anyway**.

Hardwa	re Installation
⚠	The software you are installing for this hardware: Printers
	has not passed Windows Logo testing to verify its compatibility with Windows XP. (<u>Tell me why this testing is mostant</u>) Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and
	Contact the hardware vendor for software that has passed Windows Logo testing.



There will be two Brother printer drivers listed in the Printers selection. The driver with "Printer" after the model name (ex. Brother MFC-8220 Printer) is the Brother Native Driver.



The Brother Native Drivers have been installed and the installation is now complete.

For Windows NT[®] Workstation Version 4.0 Users


Make sure that you followed the instructions from Step 1 "Setting Up the Machine" on pages 4 - 11.

 Turn on your computer. You must be logged on as the Administrator.


Connect the parallel interface cable to your computer, and then connect it to the MFC.



 DO NOT plug the power cord before connecting the parallel interface cable. It may cause damage to your MFC.



Plug the MFC into the AC power outlet. Turn the power switch on.



Insert the supplied CD-ROM for Windows[®] into your CD-ROM drive. If the language screen appears, select your language.



The CD-ROM main menu will appear. Click Install Software.





If this window does not appear, use Windows[®] Explorer to run the setup.exe program from the root directory of the Brother CD-ROM.



Click **MFL-Pro Suite** in Main Application.





MFL-Pro Suite includes Printer Driver, Scanner Driver, ScanSoft[®] PaperPort[®], ScanSoft[®] TextBridge[®], PC-FAX software, Remote Setup and TrueType fonts. PaperPort[®] is a document management application for viewing scanned documents. ScanSoft[®] TextBridge[®], which is integrated into PaperPort[®], is an OCR application that converts an image into text and inserts it into your default word processor.

Click Install.






If you see the following screen, click OK to install the Windows® updates. After the updates are installed your PC may restart. If it does the installation will automatically continue.

⚠	Some Windows updates need to be installed before the MFL-Pro Suite installation. To install the updates click OK.
	If prompted, click OK to complete installation.
	Note: The PC may restart. If it does the installation will correct ue automatically.

If the installation does not continue automatically, please open the installer menu again by double-clicking the setup.exe program on the Brother CD-ROM, and continue from Step 5.

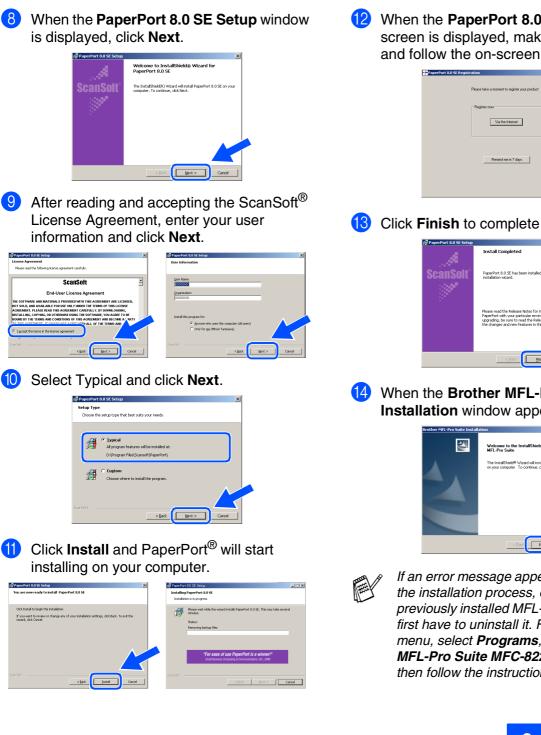

12 When the PaperPort 8.0 SE Registration screen is displayed, make your selection and follow the on-screen instructions.

PaperPort 8.0 SE	Registration	2
	Please take a moment to register your product	
	Register nov	
	Remind me in 7 days	


13 Click Finish to complete installation.

4	Install Completed
ScanSoft"	PaperPort 8.0 SE has been installed. Click Finish to exit the installation wizard.
5- ²	Please read the Release Notes for Information about using Paparfort with your particular environment. If you are the changes and new features in this release.

When the Brother MFL-Pro Suite Installation window appears, click Next.

ther MFL-Pro Suite Instal	ation 🔀	
	Welcome to the InstallShield Wizard for Brother MFL-Pro Suite	
	The Installingtife Volume of Instal Bowhee MRT-Pao Suite on your computer. To continue, click Next	
	<box next=""> Cancel</box>	

If an error message appears at this point in the installation process, or you have previously installed MFL-Pro Suite, you will first have to uninstall it. From the Start menu, select Programs, Brother, MFL-Pro Suite MFC-8220, Uninstall, and then follow the instructions on the screen.



For Administrators

Installing the Driver & Software Step 2

For Windows NT[®] Workstation Version 4.0 Users

(15) When the Brother Software License Agreement window appears, click Yes If you agree to it and go to next screen.





16 Select Local Interface, and then click Next.

Brother MFL-Pro Suite Instal	llation 🔀
Connection Type	
Choose the setup type that Click the type of Setup you	best suits your needs. prefer.
C Local Interface	Select if your device is connected to this computer. (for example using a USB or Parallel cable)
C Network Interface	Select if your device is connected through a network.
	< Bac Next > Cancel

When the Setup Type window appears, select Standard, and then click Next.

ier MFL-Pro Suiti tup Type	2
Choose the setup t Click the type of Se	upe that best suits your needs. tup you prefer.
Standard	Program will be installed with the most common options. Recommended for most users.
C Eustom	You may choose the options you want to install Recommended for advanced users
	< Bac Next > Cancel



If you want to install the PS Brother (PostScript[®]) driver, select **Custom** and then follow the on-screen instructions. When the Select Components screen appears, check PS Printer Driver. and then continue following the on-screen instructions.

18 The README file will be displayed. Please read this file for troubleshooting information and then close the file to continue installation.


Reader with the dial	s (m)	wi0
(id (verter)		
2		
	BROTHER MFL-Pro SUITE README FILE	
	THE FILE CONTINUE MERGETARIC DEVICE MERGENALISM. PLEASE PRIME & CONFO FILE MERGENE MERGENE MONTHER MEC MERTS OMER FOR LATER INFERENCE.	
Windows 98/985E	Me	
The Paradite file contains \$1. Senate Park installa	the following sections	
\$2, Hour to re-install the o	an ber	
E3. Parimetall E5. Insure searches Par	erbet	
65. PC Hang up using the fit. Summer Hade	USD interface	
17. Disting York Page 7	M	
89. Fauther MRL Control 4	w Microsoft Outlook Express Junter "Scan to File" cantingaration	
13. Scenner Resolution 11. Dealber RemoteVetor	serve endines constant	
12. Event PC faces are a	at being part from the MFC	
 Using the MIL Pro Sa M. Increase paint point to p 	its Address Book Import and Expert Anderes int Exercise III C. connected in another IX: an a Methersk	
	h media cards installed in the PhotoCapture Contor (Phot LUDE & Builder Education for Page Phot	
15. How to unmetal Pope	iPol Libe & Boller Edosans for Pape Pol.	
Note: If you are reading	g this file during the software installation process, please close it when you are finished to complete the installation	
15. Service Park Installe		
Fyou install a Senice Fac	cafer MPL Pro is installed, MPL Pro may not wark correctly. Please uninstall and then remstall MPL Pro again.	
in male, anna F1		Mar

Check the Run On-Line Registration and **í**9 then click Next.









21 After the computer restarts, click **Yes** to have the Control Center load each time Windows[®] is started. The Control Center will appear as an icon in the task tray. If you click No the Scan key on the MFC will be disabled.



- If you checked the box in step (19, the screen for On-Line Registration will appear. Please complete your registration.
- Even if you select **No**, you will be able to launch the Brother Control Center later to use the Scan key by double-clicking the SmartUI icon on the desktop. This loads the Brother Control Center to the task trav. See AutoLoad the Brother Control Center, Chapter 4 in the Documentation (Software User's Guide) located on the CD-ROM.


OK!


The Brother PC-FAX, Printer and Scanner drivers have been installed and the installation is now complete.

For Optional NC-9100h Network Interface Users (For Windows[®] 95/98/98SE/Me/NT/2000 Professional/XP)

Make sure that you have completed the instructions from Step 1 "Setting Up the Machine" on pages 4 - 11.

- Make sure that the NC-9100h (Network Print/Fax Server) is installed into the MFC. (See "Optional accessories" in Chapter 13 of the User's Guide.)
- 2 Connect the network cable to the MFC, and then connect it to a free port on your hub. Plug the MFC into the AC power outlet. Turn the power switch on.

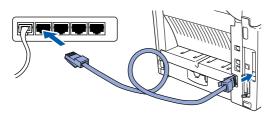



- 3 Turn on your computer. (For Windows[®] 2000 Professional/XP and Windows NT[®] 4.0, you must be logged on as the administrator.)
- Insert the supplied CD-ROM for Windows[®] into your CD-ROM drive. If the language screen appears, select your language.



- 5 The CD-ROM main menu will appear. Click **Install Software**.
 - Finite
 Concentration
 Concentration




If this window does not appear, use Windows[®] Explorer to run the **setup.exe** program from the root directory of the Brother CD-ROM.

Click **MFL-Pro Suite** in Main Application.





MFL-Pro Suite includes Printer Driver, Scanner Driver, ScanSoft[®] PaperPort[®], ScanSoft[®] TextBridge[®], PC-FAX software and TrueType fonts. PaperPort[®] is a document management application for viewing scanned documents. ScanSoft[®] TextBridge[®], which is integrated into PaperPort[®], is an OCR application that converts an image into text and inserts it into your default word processor.



nstalling the Driver & Software

For Optional NC-9100h Network Interface Users (For Windows[®] 95/98/98SE/Me/NT/2000 Professional/XP)

7 Click Install.

	MFL-Pro Suite is the application used for all PC fax sending and receiving operations. Included with MFL-Pro Suite are PaperPort® and ScanSet® TextBridge®
Install Software	PaperPort® is a document management application used to view incoming fases and scarned documents. ScanSob® TextRhdgeb is an OCR application for conventing an image into text and is integrated into PaperPort®.
	The Printer Driver, Scanner Driver, PC fax software, PaperPortB and ScanSoftB TextBridge® are automatically installed when you install MFL-Pro Sute.
🛨 Back	

If you see the following screen, click **OK** to install the Windows[®] updates. After the updates are installed your PC may restart. If it does the installation will automatically continue.

INST32	×
⚠	Some Windows updates need to be installed before the MFL-Pro Suite installation. To install the updates dick OK.
	If prompted, click OK to complete installation.
	Note: The PC may restart. If it does the installation will con-

If the installation does not continue automatically, please open the installer menu again by double-clicking the **setup.exe** program from the root directory of the Brother CD-ROM, and continue from Step 5.

8 When the **PaperPort 8.0 SE Setup** window is displayed, click **Next**.

🔀 PaperPort 8.0 SE Setup	X
A	Welcome to InstallShield® Wizard for PaperPort 8.0 SE
ScanSoft	The InstaliShield(R) Wizard will install PaperPort 8.0 SE on your computer. To continue, click Next.
	< Back Next > Cancel

9 After reading and accepting the ScanSoft[®] License Agreement, enter your user information and click Next.

PaperPort 8.0 SE Setup	×	😥 PaperPort 8.0 SE Setup
License Agreement Please read the following loanse agreement carefully.		User Information
ScanSoft	^	Liser Name:
End-User License Agreement The software and matricial s provide with this addressment are Licensen.		grganization: Intercore
IND 5 GALA ME AVAILABLE FOR USE OLLY UNDER THE TURNS OF THIS LUCRIDE MERCHANNET, FLACE AND THE ANOTHERN THE ADVENTULA, THE YORK ANDRESS, BUSTALLINGS, COPYING, GO DIERBORT USING THE SOFTWARE, YOU AGREE TO BE MORE BY THE TURNS AND ECONCENTION OF THE ADVENTULATION AND ADDRESS BUSTALLINGS, COPYING, GO DIERBORT USING THE SOFTWARE, YOU AGREE TO BE MORE BY THE TURNS AND ECONCENTION OF THE ADVENTULATION AND ADDRESS BUSTALLINGS, COPYING, GO DIERBORT, AND ADVENTULATION AND ADDRESS BUSTALLINGS, COPYING, GO DIERBORT, USING THE SOFTWARE, YOU AGREE TO BE MORE BY THE TURNS AND ADDRESS AND ADDRESS AND ADDRESS THE ADVENTULATION AND ADDRESS AND ADDRESS AND ADDRESS AND ADDRESS AND ADDRESS ADVENTULATION AND ADDRESS		Install the program for: Outprove who uses the computer (all users) Outprive the real (second)
Cancel		ScartisftCancel

O Select **Typical** and click **Next**.

Choose ch	e setup type that best suits your needs.	
A	Typical All program features will be installed at: E:\Program Files\Scansoft\PaperPort\	
1	Custom Choose where to install the program.	

1 Click Install and PaperPort[®] will start installing on your computer.



12 When the **PaperPort 8.0 SE Registration** screen is displayed, make your selection and follow the on-screen instructions.

🚰 PaperPort 8.0 SE Registration	×
Please take a moment to register your product	
Register now	
Remind ne in 7 days	

(3) Click Finish to complete installation.



When the Brother MFL-Pro Suite Installation window appears, click Next.





If an error message appears at this point in the installation process, you will first have to uninstall MFL-Pro Suite. From the **Start** menu, select **All Programs**, **Brother**, **MFL-Pro Suite MFC-8220**, **UnInstall**, and then follow the instructions on the screen.

(15) When the Brother Software License Agreement window appears, click **Yes**.

Brother MFL-Pro Suite Installation
License Agreement Please read the following license agreement carefully.
Press the PAGE DOWN key to see the rest of the agreement.
End User Lecrae Agreement to Bother SOFTWARE IMPORTANT-FLASE READ OAREFLUXT- The rick fuer Lecrae Agreement (FELUXT) is being agreement between pour and Bother Industries. List (Fishelm") which generation use of the Bother SOFTWARET. Its presently """ so you goe to be togather boom by the terms of this EDLA. I prove that the terms of this EDLA, you obtain the terms of this EDLA is presently """ you goe to be togather boom by the terms of this EDLA is presently """ you goe to be togather boom by the terms of this EDLA is presently "" you goe to be togather boom by the terms of this EDLA is presently "" you goe to be togather boom by the terms of this EDLA is presently "" you goe to be togather boom by the terms of this EDLA is presently "" you goe to be togather boom by the terms of this EDLA is presently "" you goe to be togather boom by the terms of this EDLA is presently "" you goe to be togather boom by the terms of this EDLA is presently "" you goe to be togather boom by the terms of this EDLA is presently "" you goe to be togather boom by the terms of this EDLA is presently "" you goe to be togather boom by the terms of the EDLA is presently "" you goe to be togather boom by the terms of the EDLA is presently "" you goe to be togather boom by the terms of the EDLA is presently "" you goe to be terms of the state of the EDLA is presently "" you goe to be terms of the terms of the state of the edua is include the media upon which is stored.
Do you accept all the terms of the preceding License Agreement? If you select No, thy tur- will close. To install Brother MFL-Pro Suite, you must accept this agreement.
Rack Yes No

6	Select Network Interface,	and then	click
	Next.		

Brother MFL-Pro Suite In	stallation 🔀
Connection Type	
Choose the setup type that Click the type of Setup you	t best suits your needs. I prefer.
O Local Interface	Select if your device is connected to this computer. (for example using a USB or Parallel cable)
 Network Interface 	Select if your device is connected through a network.
	< Back Cancel Cancel

Select Standard, and then click Next. The application files will be copied to your computer.

Setup Type	124
Choose the setup t Click the type of Se	ype that best suits your needs. stup you prefer.
 Standard 	Program will be installed with the most common options. Recommended for most users.
O Custom	You may choose the options you want to install. Recommended for advanced users.
	(Back Next) Cancel



If you want to install the PS Brother (PostScript[®]) driver, select **Custom** and then follow the on-screen instructions. When the **Select Components** screen appears, check **PS Printer Driver**, and then continue following the on-screen instructions.


18 Select Search the network for devices and choose from a list of discovered devices (Recommended), and then click Next.

Brother MFL-Pro Suite Installation 🛛 🔀
Network Search Type
Choose how you will locate your Brother MFC on the network?
Search the network for devices and choose from a list of discovered devices [Recommended]
O Specify your MFC by address (Advanced Users)
IP Address
Specify your MFC by name (Advanced Users)
Node Name
< Back Next > Concel



If you see the following screen, click **OK**.





letwor

For Administrators

Installing the Driver & Software Step 2

For Optional NC-9100h Network Interface Users (For Windows[®] 95/98/98SE/Me/NT/2000 Professional/XP)

19 If the MFC is un-configured for your network: Select the APIPA or un-configured device from the list and then click Next. \rightarrow Go to 20

If the MFC is configured for your network: Select the MFC from the list and then click Next. \rightarrow Go to \bigotimes

moose the Brother MFC you want to install			
Node Name	IP Address	Model Name	
BRN_xxxxxxx	APIPA	Brother MEC-00000	
BRN_xxxxxxx	88.88.89.88	Brother MFC-XXXX	8
		Configure IP Address	Refresh

20 Click Configure IP Address.







21 Enter the proper IP Address information for your network, and then click OK.

Enter the TCP/IF this Print Server	configration for	ОК	
		Cancel	
IP Address	192.168.0.105		
Subnet Mask	0.0.0.0		
Gateway	0.0.0.0		

(e.g. Enter 192.168.0.105 for IP Address)





Windows[®] 98/98SE/Me/2000/XP Users → Go to 🙁 Windows[®] 95/NT Users \rightarrow Go to 26

23 Select yes and then click Next to configure Network Scanning.

Brother MFL-Pro Suite Installation
Register your PC with the "Scan To" functions at the machine
Register your PC with the Brother machine to enable Network "Scan to" functions at the machine. "You PC will appear when the "Scan to" options at the machine are selected, (Recommended), You can be instruct who use the network "Scan to "to your PC by edding a Pin number to security.
• Yes, I want to register this PC to "Scan To" button.
○ No, I don't want register this PC to "Scan To" button.

24 Click Next or enter the name you want displayed on the LCD for your PC and then click Next. The default name is the name of your PC.



You can avoid receiving unwanted documents by setting a 4-digit PIN Number.

This name will appear when the "Scan to" menu is selected at the MEC.	
	Display Name
Scan To' Button Pin number for this PC	
Pin number ('0'-9', 4 digits)	
Retype Pin number	

Please wait for the window to open.

For Administrators

nstalling the Driver & Software

The README file will be displayed. Please read this file for troubleshooting information and then close the file to continue installation.

🛛 ReadWe.wri - WordPad	1
File Edit Wew Insert Format Help	Т
D 🖉 🖬 🚳 🗘 🙀 🗴 Ta 🖻 🗠 🧕	
Arial 💌 14 💌 Western 💌 🗷 🖊 😰 🖉 🗄 🗄	
\$iii\$i\$i\$i\$i\$	
BROTHER MFL-Pro SUITE README FILE	
THIS FILE CONTAINS IMPORTANT UPDATE INFORMATION PLEASE PRINT A COPY OF THIS FILE AND REEP IT WITH YOUR BROTHER MFC USER'S OUDE FOR LATER REFERENCE.	
Windows 98/98SE/Me	
The Transfer Aller contracts the following sections 100 Section 2014 and 100 Section 2014 2014 Section 2014 and 2014 Section 2014 2014 Section Section 2014	




Check the **Run On-Line Registration** and then click **Next**.

Brother MFL-Pro Suite Installation	
On-Line Registration	22
Select the actions to perform when Setup finishes.	
Fun On-Line Registration [This service may not be available in all countries.]	
	Cancel



Click Finish to restart your computer.





The Network Scanning feature is not supported in Windows[®] 95 or NT.

For Windows[®] XP Users Only The Brother PC-FAX, Printer and Scanner drivers have been installed and the installation is now complete. After the computer restarts, click Yes to have the Control Center load each time Windows[®] is started. The Control Center will appear as an icon in the task tray. If you click No the Scan key on the MFC will be disabled.

SmartUI	×
?	Would you like the Brother MFL Pro Control Center automatically loaded when you reboot your system?
	If you select No, the 'Scan to File' and 'Scan to Email' buttons will be disabled.
	Yes No



If you checked the box in step 26, the screen for On-Line Registration will appear. Please complete your registration.

Even if you select No, you will be able to launch the Brother Control Center later to use the Scan key by double-clicking the SmartUI icon on the desktop. This loads the Brother Control Center to the task tray. See AutoLoad the Brother Control Center, Chapter 4 in the Documentation (Software User's Guide) located on the CD-ROM.



For Windows[®] 98/98SE/Me/2000 Users The Brother PC-FAX, Printer and Scanner drivers have been installed and the installation is now complete.

For Windows[®] 95/NT Users

The Brother PC-FAX and Printer drivers have been installed and the installation is now complete.

For USB Interface Cable Users

For Mac OS[®] 8.6 to 9.2

Make sure that you have completed the instructions from Step 1 "Setting Up the Machine" on pages 4 - 11.


1

Switch off and unplug the MFC from the AC outlet and disconnect it from your Macintosh[®] if you already connected an interface cable.

- 2 Turn on your Macintosh[®].
- Insert the supplied CD-ROM for Macintosh[®] into your CD-ROM drive.




4 Double-click the **Start Here** icon to install the printer, scanner and PC-FAX Send drivers. If the language screen appears, select your language.



5 Click **Install** next to the MFL-Pro Suite for your country.



- 6 Follow the on-screen instructions, and restart your Macintosh[®].
 - Connect the USB interface cable to your Macintosh[®], and then connect it to the MFC.

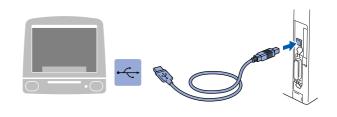

0

DO NOT connect the MFC to a USB port on a keyboard or a non powered USB hub.

8 Plug the MFC into the AC power outlet. Turn the power switch on.








Macintosh®



(1) Click the **Brother Laser** icon you installed. On the right side of the Chooser, select the printer to which you want to print. Close the Chooser.





The Brother PC-FAX Send, Printer and Scanner drivers have been installed.

1 To install Presto![®] PageManager[®], click Install next to the Presto! PageManager icon and follow the on-screen instructions.

1	MFL-Pro Suite:Start Here		E
brother	Install Software		
	MFL-Pro Suite		
	US/Canada (standard paper is Letter)	Install	
	Other (standard paper is A4)	Install	
	Presto! PageManager	Install	
Back			
📩 Exit			



You can easily scan, share and organize photos and documents using Presto!® PageManager[®].

0	K!)

Presto![®] PageManager[®] has been installed and the installation is now complete.


For USB Interface Cable Users

For Mac OS[®] X 10.1/10.2.1 - 10.3 or greater

Make sure that you have completed the instructions from Step 1 "Setting Up the Machine" on pages 4 - 11.

1

Turn off and unplug the MFC from the AC outlet and disconnect it from your Macintosh[®] if you already connected an interface cable.

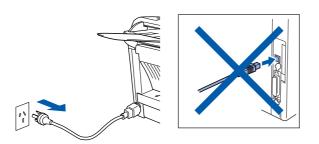

- 2 Turn on your Macintosh[®].
- Insert the supplied CD-ROM for Macintosh[®] into your CD-ROM drive.



Double-click the Start Here OSX icon to install the printer driver, Scanner driver, Brother PC-FAX Send and Remote Setup program. If the language screen appears, select your language (Scanning is not supported in Mac OS[®] 10.1).






Click Install next to the MFL-Pro Suite.

brother	Install Software		
	MFL-Pro Suite		
	Presto! PageManager	Install	
🖆 Back			


Follow the on-screen instructions, and restart your Macintosh[®].

Connect the USB interface cable to your Macintosh[®], and then connect it to the MFC.




DO NOT connect the MFC to a USB port on a keyboard or a non powered USB hub.

8 Plug the MFC into the AC power outlet. Turn the power switch on.




9 Select Applications from the Go menu.

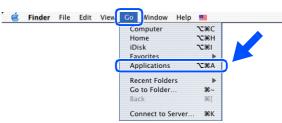

10 Open the **Utilities** folder.

0	🛃 Appli	cations	Θ
	E 🏦	💚 🔶	
View	Computer Home	Favorites Applications	
	Q	Ŕ	(
Preview	QuickTime Player	Sherlock	
) (
Stickies	System Preferences	tEdit	
	Utilities		ļ
	View View Preview	View Computer forme Preview QuickTime Player Strickies System Preferences	View Computer Home Favorites Applications View QuickTime Player Sherlock Stickles System Preferences

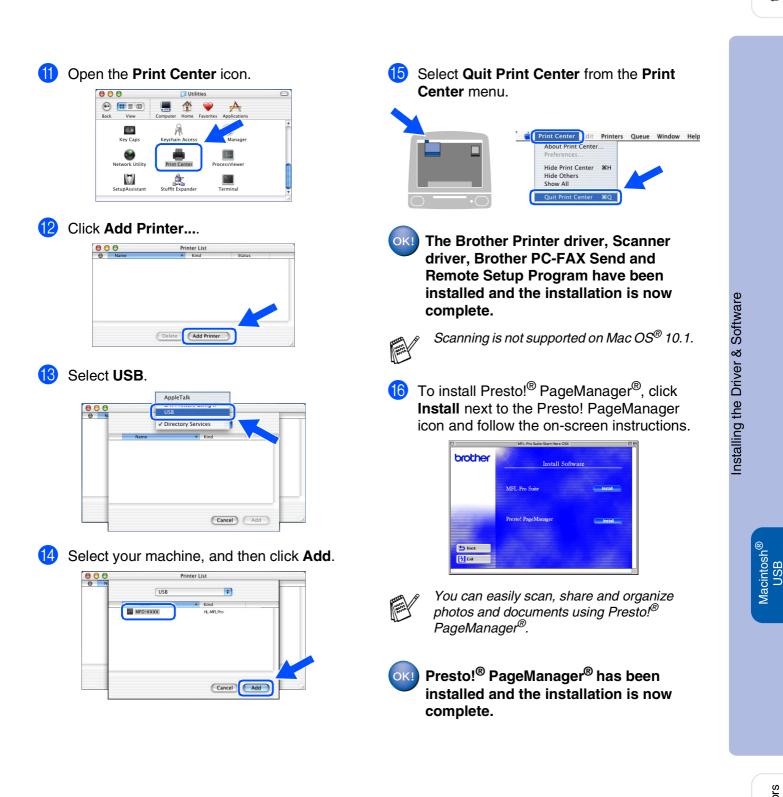


For Optional NC-9100h Network Interface Users

For Mac OS[®] 8.6 to 9.2

Make sure that you have completed the instructions from Step 1 "Setting Up the Machine" on pages 4 - 11.

- Make sure that the NC-9100h (Network Print/Fax Server) is installed into the MFC. (See "Optional accessories" in Chapter 13 of the User's Guide.)
- 2 Turn off and unplug the MFC from the AC outlet and disconnect it from your Macintosh[®] if you already connected an interface cable.

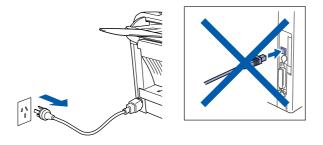

- Turn on your Macintosh[®].
- Insert the supplied CD-ROM for Macintosh[®] into your CD-ROM drive.




5 Double-click the **Start Here** icon to install the printer, scanner and PC-FAX Send drivers. If the language screen appears, select your language.




6 Click **Install** next to the MFL-Pro Suite for your country.

brother	Install Software	
	MFL-Pro Suite	
	US/Canada (standard paper is Letter)	Install
	Other (standard paper is A4)	Instell
	Presto! PageManager	
Back		


- 7 Follow the on-screen instructions, and restart your Macintosh[®].
- 8 Connect the network interface cable to the printer, and then connect it to a free port on your hub.

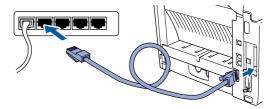

9 Plug the MFC into the AC power outlet. Turn the power switch on.




Macintosh®





1 Click the Brother Laser (AT) icon, and then select BRN_xxxxx_P1. Click Setup.





xxxxxx are the last six digits of the Ethernet address.



Select your model and click **OK**. Close the **Chooser**.





Network User's Guide Chapter 7 on the CD-ROM.




The setup is now complete.

For Optional NC-9100h Network Interface Users

For Mac OS[®] X 10.1/10.2.1 - 10.3 or greater

Make sure that you have completed the instructions from Step 1 "Setting Up the Machine" on pages 4 - 11.

- Make sure that the NC-9100h (Network Print/Fax Server) is installed into the MFC. (See "Optional accessories" in Chapter 13 of the User's Guide.)
- 2 Turn off and unplug the MFC from the AC outlet and disconnect it from your Macintosh[®] if you already connected an interface cable.

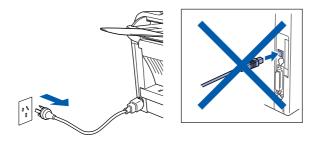

- 3 Turn on your Macintosh[®].
 - Insert the supplied CD-ROM for Macintosh[®] into your CD-ROM drive.




5 Double-click the **Start Here OSX** folder to install the printer driver and Remote Setup program. If the language screen appears, select your language.




6 Click Install next to the MFL-Pro Suite.

brother	MEL-Pro Suite:Start Here OSX Install Software		
	MFL-Pro Suite		
	Presto! PageManager	Install	
Back			


- 7 Follow the on-screen instructions, and restart your Macintosh[®].
- 8 Connect the network interface cable to the printer, and then connect it to a free port on your hub.

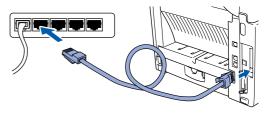


9 Plug the MFC into the AC power outlet. Turn the power switch on.



O Select Applications from the Go menu.

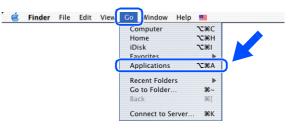

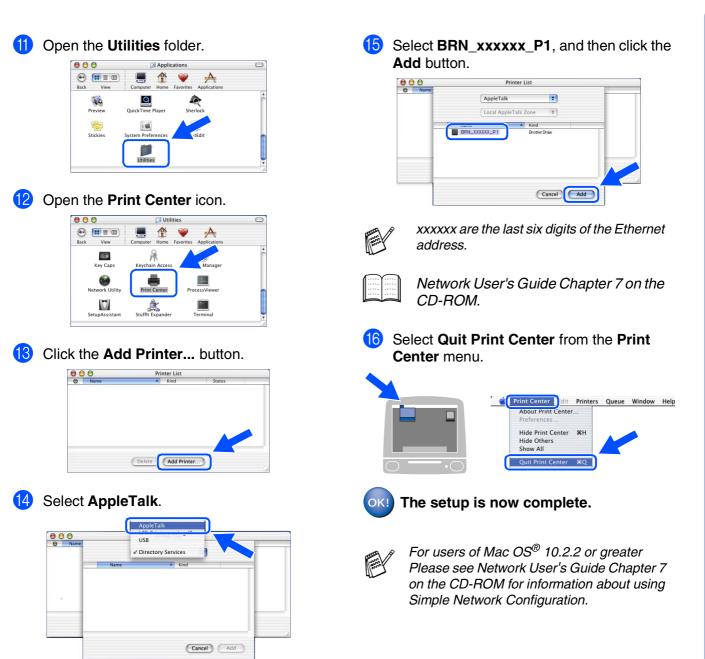

For Administrators

This section is for using the printer on a network with the optional NC-9100h. An administrator should set up the printer using the following steps.

Network User's Guide Chapter Map (NC-9100h)





Windows [®] 95/98/Me	Peer-to-Peer	TCP/IP	Chapter 3	Peer-to-Peer Printing
		NetBIOS	Chapter 4	NetBIOS Peer-to-Peer Printing
	Brother Internet Print	TCP/IP	Chapter 5	Configuring Internet Print for Windows [®]
	Netware	IPX/SPX	Chapter 6	Novell Netware Printing
Windows NT [®]	Peer-to-Peer	TCP/IP	Chapter 2	TCP/IP Printing
		NetBIOS	Chapter 4	NetBIOS Peer-to-Peer Printing
		DLC/LLC	Chapter 8	DLC Printing
	Brother Internet Print (NT [®] 4.0 only)	TCP/IP	Chapter 5	Configuring Internet Print for Windows [®]
	Netware	IPX/SPX	Chapter 6	Novell Netware Printing
Windows [®] 2000/XP	Peer-to-Peer (Windows [®] 2000 only)	TCP/IP	Chapter 2	TCP/IP Printing
		NetBIOS	Chapter 4	NetBIOS Peer-to-Peer Printing
		DLC/LLC	Chapter 8	DLC Printing
	IPP (Internet Printing Protocol)	TCP/IP	Chapter 2	TCP/IP Printing
	Brother Internet Print	TCP/IP	Chapter 5	Configuring Internet Print for Windows [®]
	Netware	IPX/SPX	Chapter 6	Novell Netware Printing
UNIX/Linux		TCP/IP	Chapter 1	UNIX Printing
Macintosh [®]		AppleTalk	Chapter 7	Apple talk (Ether Talk TCP/IP Printing)
		TCP/IP	Chapter 7	Apple talk (Ether Talk TCP/IP Printing)
		Simple Network Configuration	Chapter 7	Simple Network Configuration
OS2 Warp Server		TCP/IP	Chapter 2	TCP/IP Printing
LAN Server		NetBIOS	Chapter 4	NetBIOS Peer-to-Peer Printing

Installing the BRAdmin Professional Configuration Utility (Windows[®] Users Only) The BRAdmin Professional software utility is designed to manage your Brother network connected devices such as network-ready printers and/or network-ready Multifunction devices

in a Local Area Network (LAN) environment. BRAdmin Professional can also be used to manage devices from other manufacturers whose products support SNMP (Simple Network Management Protocol).

For more information on BRAdmin Professional go to http://solutions.brother.com

Insert the supplied CD-ROM for Windows[®] Click Network Applications for Optional into your CD-ROM drive. The opening NC-9100h. screen will appear automatically. Follow the on-screen instructions. brother Click the Install Software icon on the menu The last screen. Click BRAdmin Professional and follow brother MFC-8220 MFL-Pro Suit the on-screen instructions. 6 Install Software brothe Documentation Brother Solutions Cente ? Exit

The default password for the print server is "access".

You can use BRAdmin Professional or a web browser to change this password.

Web BRAdmin

Brother has also developed Web BRAdmin, an enterprise network software utility that enables management of Brother and other SNMP compliant devices in larger LAN/WAN environments.

This software is Web server based and requires the installation of Microsoft's Internet Information Server and Sun's Java client software. To learn more about the Web BRAdmin software or to download it, please go to http://solutions.brother.com/webbradmin

Administrators

Setting Up the Machine

Windows[®] USB

Windows[®] Parallel

Mindows NT[®] 4.0 Parallel

Windows[®] Network

Macintosh[®] USB

Macintosh[®] Network


Setting your IP Address, Subnet Mask and Gateway using BRAdmin Professional (Windows[®] Users Only)




File Devices Contro	e Xew Fielb				
	2 1 5 5 5 6 1 1 1	8 🐔			
F ers	Node Name	Log	Node Address	Printer Status	^
TCP/IP	4				
- IPX/SPX					
1					
	<				- P
	15				1
For help, press F1			Devices	22 Unconfigured: 0	

 Select Search Active Devices from the Devices menu.

BRAdmin will search for new devices automatically.

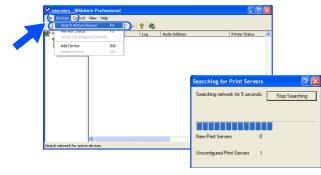

3 Double-click the new device.

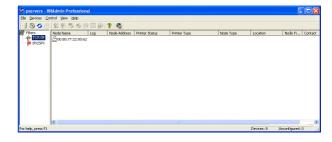

4 Enter the IP Address, Subnet Mask and Gateway, and then click the OK button.

Configure TC	P/IP Address		
Enter the TCP/IP configuration for this Print Server.		ОК	
		Cancel	
IP <u>A</u> ddress	10.100.20.20	-	
<u>S</u> ubnet Mask	255.255.255.0		
<u>G</u> ateway	10.100.20.254		

5 The address information will be saved to the printer.



The default password for the print server is "access".

You can use BRAdmin Professional or a web browser to change this password.

Options

The MFC has the following optional accessories. You can expand the capabilities of the MFC by adding these items.

Lower Tray Unit	DIMM Memory	Network Print/Fax Server	
LT-5000		NC-9100h	
		R H C R	
Second lower paper tray expands total input capacity by another 250 sheets to a total input capacity of 500 sheets.	For more details, see "Memory Board" in Chapter 13 of the User's Guide.	The optional Network Print/FAX Server (NC-9100h) transforms your MFC into a Network Multi Function Center, offering Network Printing / Network PC-FAX send and Network Scanning capability.	

Replacement Consumables

Drum Unit	Toner		
DR-3000	TN-3030/TN-3060		
Up to 20,000 A4 pages @ 5% coverage.	TN-3030: Up to 3,500 A4 pages @ 5% coverage. TN-3060: Up to 6,700 A4 pages @ 5% coverage.		

Trademarks

The Brother logo is a registered trademark of Brother Industries, Ltd.

Brother is a registered trademark of Brother Industries, Ltd.

Multi-Function Link is a registered trademark of Brother International Corporation.

© Copyright 2004 Brother Industries, Ltd. All rights reserved.

Windows, Microsoft and Windows NT are registered trademarks of Microsoft in the U.S. and other countries. Macintosh, QuickDraw, iMac and iBook are trademarks or registered trademarks of Apple Computer, Inc.

PostScript and PostScript Level 3 are registered trademarks or trademarks of Adobe Systems Incorporated. PaperPort and TextBridge are registered trademarks of ScanSoft, Inc.

Presto! PageManager is a registered trademark of NewSoft Technology Corporation.

Each company whose software title is mentioned in this manual has a Software License Agreement specific to its proprietary programs.

All other brand and product names mentioned in this manual are registered trademarks of their respective companies.

Compilation and Publication

Under the supervision of Brother Industries Ltd., this manual has been compiled and published, covering the latest product descriptions and specifications.

The contents of this manual and the specifications of this product are subject to change without notice.

Brother reserves the right to make changes without notice in the specifications and materials contained herein and shall not be responsible for any damages (including consequential) caused by reliance on the materials presented, including but not limited to typographical and other errors relating to the publication.

This product is designed for use in a Professional Environment.

©2004 Brother Industries, Ltd.



ARL/ASA/NZ Version A