




The latest manuals are available at the Brother support website: support.brother.com/manuals

Read the *Product Safety Guide* first, then read this *Quick Setup Guide* for the correct installation procedure.

1 Unpack the machine and check the components

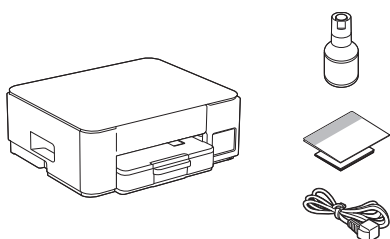


Remove the protective tape and the film covering the machine.



NOTE

- The illustrations in this guide may not match your model exactly, but the steps are the same for each model.
- The components may differ depending on your country.
- Save all packing materials and the box in case you need to ship your machine.
- We recommend using a USB 2.0 cable (Type A/B) that is no more than 6 feet (2 meters) long (included in some countries).

2 Load plain Letter paper in the paper tray

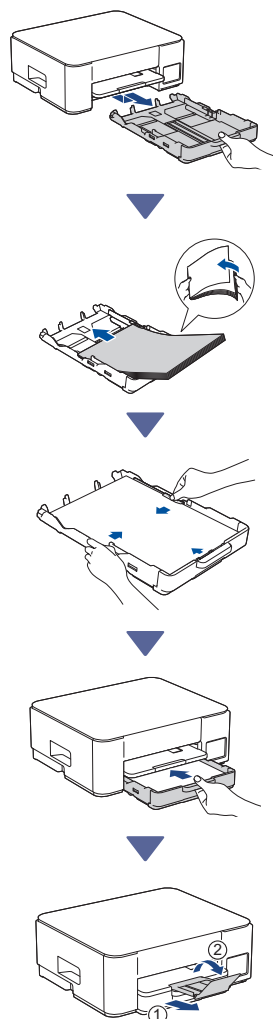


3 Connect the power cord

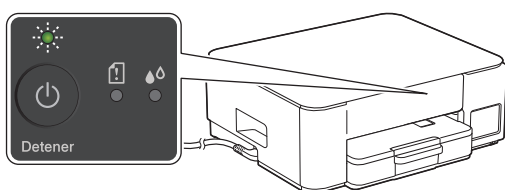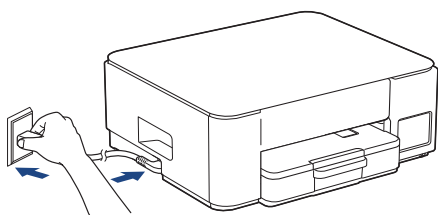

The machine powers on automatically and the Power LED is flashing.


4 Set up from the control panel on the machine

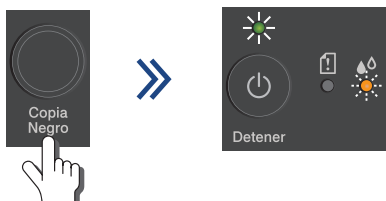

When the Power LED starts flashing slowly, press and hold the **Copia Negro (Black Copy)** button for three seconds.


Confirm that the Power LED is lit and the Ink LED is flashing, and then proceed to the next step.

5 Fill the ink tanks with starter ink

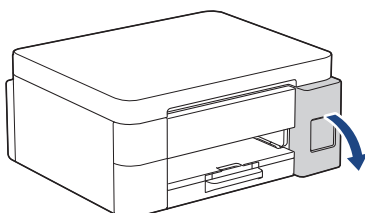

Open the ink tank cover.


(The illustrations in this guide may not match your model exactly, but the steps are the same for each model.)



Remove the cap (1) and place it inside the back of the cover (2).



Remove the ink bottle cap.

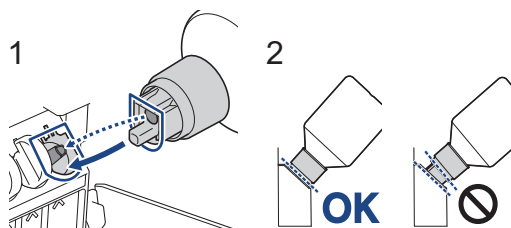


Align the bottle so that the pin on the ink tank can be inserted into the hole in the bottle, as shown in (1).

Slide the bottle onto the pin at the angle shown in (2) until the cap is flush with the ink tank surface. (You will hear a click when you insert it for the first time.)


The bottle will support itself when in the correct position and the ink will fill the tank automatically. If the ink flow does not start automatically or if the tank fills very slowly, carefully remove and reinsert the bottle.




Continue to the next column



When finished, remove the bottle, pulling the nozzle slowly so the ink does not spill.

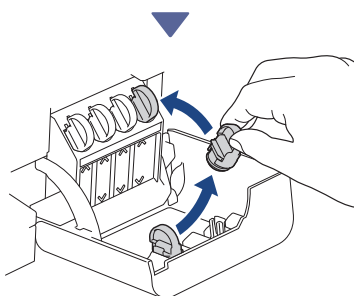


Remove the cap from inside the ink tank cover and seal the ink tank.

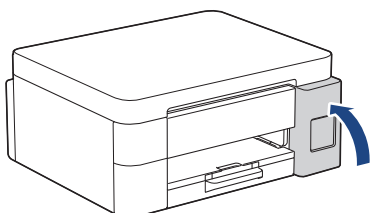

After filling all of the ink tanks, close the ink tank cover.

6 Start the initial cleaning

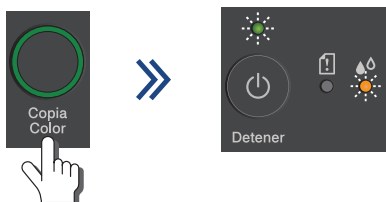


Press and hold the **Copia Color (Color Copy)** button for three seconds to start the initial ink system cleaning. During the initial cleaning, both the Power and Ink LEDs will flash. Cleaning can take a few minutes.



When the initial ink system cleaning has finished, the machine prints the Print Quality Check Sheet.


7 Check the print quality

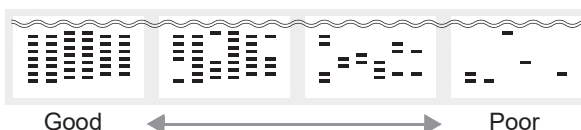

Check the Print Quality Check Sheet.
To improve the print quality, clean the print head.
See the *Reference Guide*.


8 Connect your computer or mobile device to your machine (if needed)

Go to setup.brother.com and download app/software.

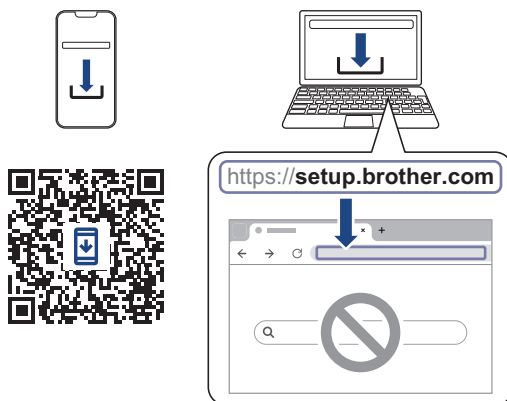

NOTE

For USB connection, locate the correct port on the side of the machine, as shown.

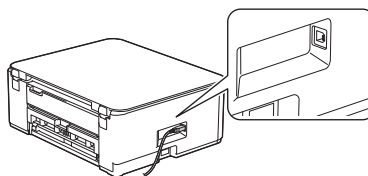

Setup Finished

Now you are ready to print or scan from this machine.

Important Notice for Network Security:


The default password to manage this machine's settings is located on the back of the machine and marked "Pwd". We recommend immediately changing the default password to protect your machine from unauthorized access.

9 Manual wireless setup (Network models only)

If the wireless setup is not successful, try to set up the connection manually.

If your wireless access point/router supports WPS (Push Button Configuration), you can use WPS from your machine's control panel to configure your wireless network settings.

1. Press the **Wi-Fi** button three times.
The Wi-Fi LED starts flashing.



2. Press the WPS button on your wireless access point/router.

If your wireless device is connected successfully, the Power LED and Wi-Fi LED are lit. Go to step 8 to download app/software.

If still not successful, visit support.brother.com for FAQs and Troubleshooting.