

# Driver Installation Guide

## Macintosh® For USB Users

- Follow the instructions in this guide for your operating system.
- Some illustrations are based on the HL-1870N.

**Steps 1 to 4** Follow these steps in the **Quick Setup Guide** first.

LJ5998001 Printed in China

### For Mac® OS 8.6 to 9.2 Users Only

#### Step 5 Connect the Printer to Your Macintosh® & Install the BR-Script PPD File

- 1 Click "Connect the interface cable & Install the driver/utility."
- 2 Make sure the printer power switch is on.
- 3 Connect the USB interface cable to your Macintosh®, and then connect it to the printer.
- 4 Follow the instructions on the screen.

**Note:** If this screen appears, select the USB interface cable.

- 5 Open the Macintosh HD icon.
- 6 For Mac® OS 8.6 to 9.04 Users: Open the Apple Extras folder. Open the Apple LaserWriter Software folder. For Mac® OS 9.1 to 9.2 Users: Open the Applications (Mac® OS 9) folder. Open the Utilities folder.
- 7 Open the Desktop Printer Utility icon.
- 8 Select Printer (USB), and then click the OK button.
- 9 Click the Change... button in PostScript™ Printer Description (PPD) file. Select Brother HL-1850\_1870N series, and then click the Select button.

The illustrations are based on Mac® OS 9.04.

- 10 Click the Change... button in USB Printer Selection. Select HL-1850\_1870N series, and then click the OK button.
- 11 Click the Create... button.
- 12 Enter your printer name (HL-1850\_1870N series), and then click the Save button.
- 13 Select Quit from the File menu.

#### Step 6 Setting Your Printer as the Default Printer

- 1 Click the HL-1850\_1870N series icon on the Desktop.
- 2 Select Set Default Printer from the Printing menu.

The setup is now complete.

### For Mac® OS X 10.1 Users Only

#### Step 5 Connect the Printer to Your Macintosh® & Install the BR-Script PPD File

- 1 Make sure the printer power switch is on.
- 2 Connect the USB interface cable to your Macintosh®, and then connect it to the printer.
- 3 Insert the CD-ROM into your CD-ROM drive. Open the Mac OS X folder.

- 4 Open your language folder.
- 5 Double-click the PPD Installer icon. Follow the instructions on the screen.
- 6 Open the Macintosh HD icon.

- 7 Open the Applications folder. Open the Utilities folder.
- 8 Open the Print Center icon.

- 9 Click the Add Printer... button.
- 10 Select USB.
- 11 Select HL-1850\_1870N series, and then click the Add button.

- 12 Select Quit Print Center from the Print Center menu.

The setup is now complete.

# Driver Installation Guide

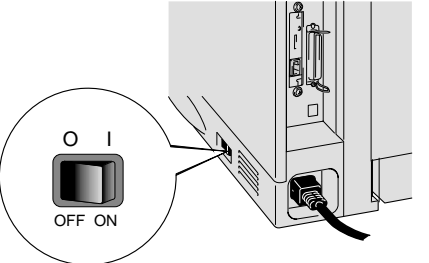
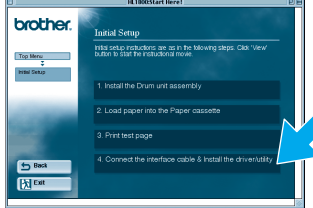

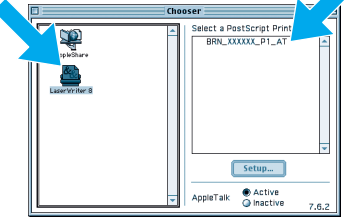
## Macintosh® For Network Users

- For HL-1850 users: If you are going to connect the printer to your network, purchase the optional Network board (NC-4100h).
- Before you continue, please ensure that the administrator has configured the network printer settings correctly referring to the **Network Quick Setup Guide**.
- Follow the instructions in this guide for your operating system.
- Some illustrations are based on the HL-1870N.

**Steps 1 to 4** Follow these steps in the **Quick Setup Guide** first.

### For Mac® OS 8.6 to 9.2 Users Only

#### Step 5 Connect the Printer to Your Macintosh® & Install the BR-Script PPD File

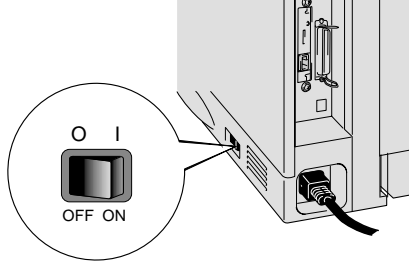
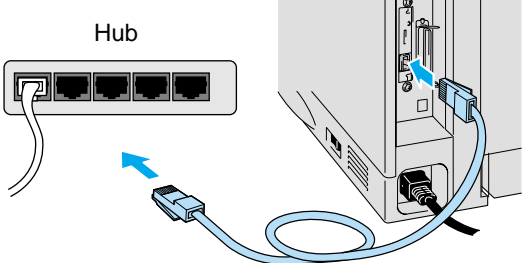
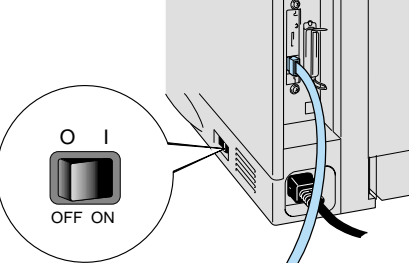

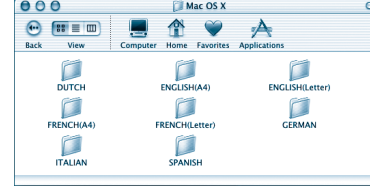
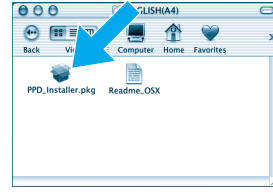

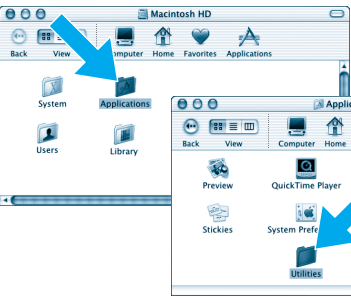
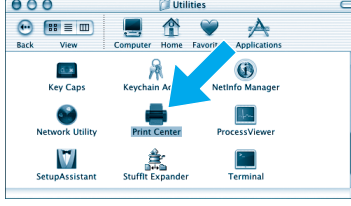
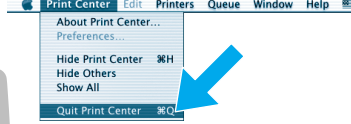
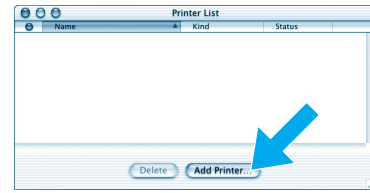
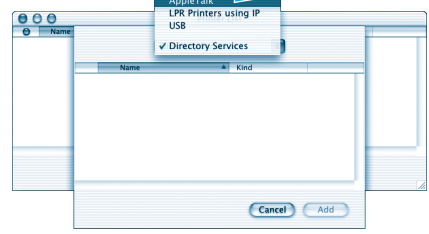
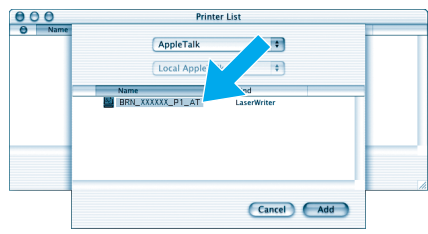
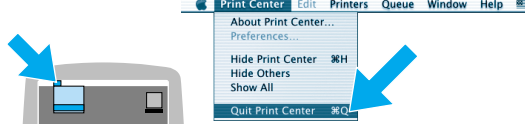
- 1 Click "Connect the interface cable & Install the driver/utility."
- 2 Select the Network interface cable.
- 3 Turn off the printer power switch.
- 4 Connect the network interface cable to the printer, and then connect it to a free port on your hub.
- 5 Turn on the printer power switch.
- 6 Follow the instructions on the screen.
- 7 Open the Chooser from the Apple menu.
- 8 Click the LaserWriter8 \*1 icon, and then select BRN\_XXXXX\_P1\_AT.\*2. Click the Create... button. Close the Chooser.

**The Setup is now complete.**

\*1 If the Apple LaserWriter8 Driver is not already installed on your system, you can download it from <http://www.apple.com>  
 \*2 xxxxxx are the last six digits of the Ethernet address. For more information, see Chapter 7 of the Network User's Guide.

### For Mac® OS X 10.1 Users Only

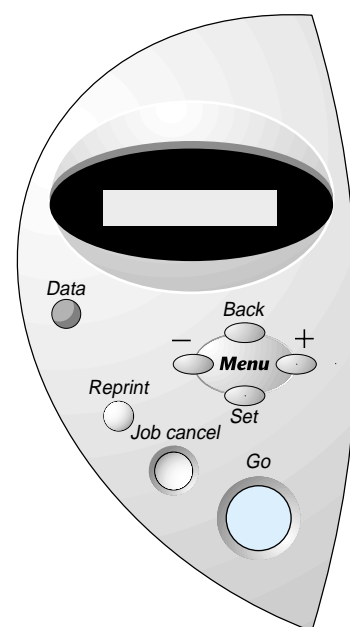
#### Step 5 Connect the Printer to Your Macintosh® & Install the BR-Script PPD File

- 1 Turn off the printer power switch.
- 2 Connect the network interface cable to the printer, and then connect it to a free port on your hub.
- 3 Turn on the printer power switch.
- 4 Insert the CD-ROM into the CD-ROM drive. Open the Mac OS X folder.
- 5 Open your language folder.
- 6 Double-click the PPD Installer icon. Follow the instructions on the screen.
- 7 Open the Macintosh HD icon.
- 8 Open the Applications folder. Open the Utilities folder.
- 9 Open the Print Center icon.
- 10 Click the Add Printer... button.
- 11 Select AppleTalk.
- 12 Select BRN\_XXXXX\_P1\_AT\*3, and then click the Add button.
- 13 Select **Quit Print Center** from the Print Center menu. **The setup is now complete.**

\*3 xxxxxx are the last six digits of the Ethernet address. For more information, see Chapter 7 of the Network User's Guide.

### Control Panel



#### Data LED : Orange

On	Data remains in the printer buffer.
Blinking	Receiving or processing data.
Off	No remaining data.

#### Buttons

Go	Exit from the control panel menu, Reprint settings or clear error messages. Pause / Continue printing.
Job Cancel	Stop and cancel the printer operation in progress.
Reprint	Select the Reprint menu.
Menu	+ Move forward through menus.
	- Move backward through menus.
	Set Select the control panel menu. Set the selected menus and settings.
	Back Go back one level in the menu structure.

#### Language Setting (Default setting is English)

1. Select the **SETUP** mode by pressing the **+** button, and then press the **Set** button.
2. Check that the **LANGUAGE** message appears, and then press the **Set** button.
3. Choose your language by pressing the **+** or **-** button, and then press the **Set** button. An asterisk mark (\*) appears at the end of the display.  
 (You can return to the **READY** status by pressing the **Go** button.)

**Note** Please enhance the RAMDISK size when you want to use the Reprint functions without the optional HDD or CompactFlash. See "RAM expansion" in Chapter 4 of the User's Guide on the supplied CD-ROM.

For more information, see "CONTROL PANEL" in Chapter 3 of the User's Guide on the supplied CD-ROM.