

User's Guide

Order Supplies



Copyright

Copyright © 2020 Brother Industries, Ltd. All rights reserved.

Information in this document is subject to change without notice. The software described in this document is furnished under licence agreements. The software may be used or copied only in accordance with the terms of those agreements. No part of this publication can be reproduced in any form or by any means without prior written permission of Brother Industries, Ltd.

Trademarks

Brother is the trademark of Brother Industries, Ltd.

Any trade names and product names of companies appearing on Brother products, related documents and any other materials are all trademarks or registered trademarks of those respective companies.

Table of Contents

1	Background	3
	1.1 Overview	3
	1.2 Installation.....	4
2	Activation	5
3	Configuration	6
	3.1 Creating and editing JSON files	6
	3.2 Settings	7
	3.3 Deploying the configuration file	8
4	Usage	9
	4.1 Ordering supplies from the machine's control panel	9
	4.2 Troubleshooting	10
	Appendix 1 – Sample JSON File	11


1

Background

1.1 Overview



The Brother “Order Supplies” software solution allows users to quickly order Brother genuine supplies from their network-connected machines. Such orders are then emailed to a designated Brother dealer or IT administrator who can fulfil them according to the requested supply type and quantity.

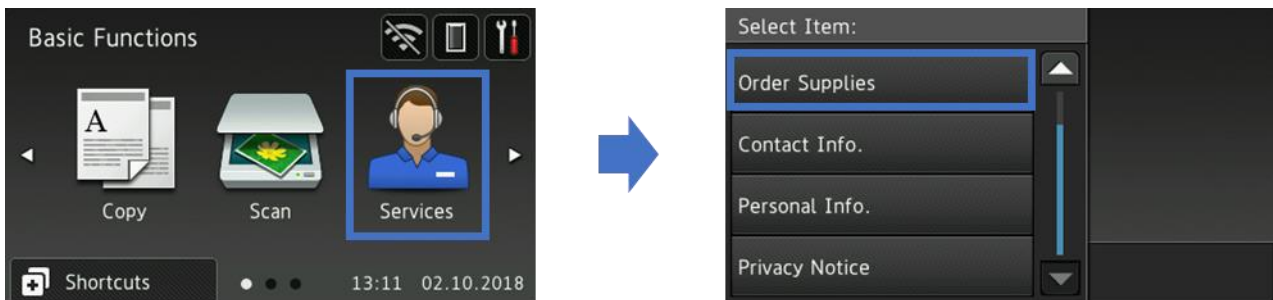

Features

- Adds the “Order Supplies” button to the machine’s Services menu.
- Customisable maximum number of supplies and accessories allowed per order.
- An optional PIN to prevent unauthorised orders of supplies.
- Customisable user and dealer/IT administrator contact information stored on the machine.
- Quick configuration using JSON files and the Brother Mass Deployment Tool.
- Quick and secure communication via email (SSL or TLS).

1.2 Installation

To install the “Order Supplies” solution, you must perform the following operations:

1. Activation

Use the Brother Software Licence Management Tool to send a valid licence file to the target machine.

2. Configuration

Use the Brother Mass Deployment Tool to send a previously created JSON setting file to the target machine.



You can download both tools from support.brother.com.

NOTE

For a comprehensive list of all Brother machines compatible with the Brother “Order Supplies” solution, see your local Brother website.

2

Activation

To activate the “Order Supplies” solution, send a valid licence file to the target machine using the Brother Software Licence Management Tool. If you do not have a valid licence file (in LIC format), contact your local Brother office.



You can download the tool from support.brother.com.

NOTE

To successfully send licence files to the target machines, make sure that:

- The target machines are correctly set up, connected to a local network, and available.
- The target machines have the latest firmware installed. To update your machine’s firmware, go to support.brother.com and download the Firmware Update Tool.
- You know the target machines’ passwords. You can activate more than one machine using the same software solution if the target machines have a common password, or if they are not password-protected.

1. Run the Brother Software Licence Management Tool.
2. The tool lists the Brother machines on your network. Double-click the machines you want to select for activation, and then click the **Activate** button.
 - If no machines are listed: Click the **Search** button to update the list.
 - If the machines you want are not in the list: Go to **Search > Add Machine**.
3. The **Licence Selection** window appears. Select the correct software solution licence file (LIC file) for your target machines.

NOTE

If you were provided with 20-digit licence codes, you can use them instead of the LIC file.

4. If the machines are password-protected, enter the password, and then click **OK**.
5. Make sure the information in the **Confirmation** dialog box is correct, and then click the **Activate** button.

When the activation is complete, the newly activated machines will be rebooted, and the log file will be saved in the tool’s folder.

NOTE

For more information, see the *Brother Software Licence Management Tool User’s Guide* at support.brother.com.

To configure a service solution component, prepare a correct JSON (JavaScript Object Notation) settings file, and then send it to the target machine using the Brother Mass Deployment Tool.

3.1 Creating and editing JSON files

JSON is an open standard that allows you to specify your own settings without having to understand PCL or PJI commands. Any JSON-supported text editor can be used to create and edit settings files.

JSON file format (Example)

```
{
  "attributes": {
    "software_id": "pns_firmware",      ← fixed value "pns_firmware"
    "setting_version": "",              ← version (operators can use this field for tracking)
    "schema_revision": 4                ← current schema version
  },
  "settings": {
    "network": {
      "protocol": {
        "mail": {
          "mail_enabled": true
        },
        "services_mail": {
          "smtp_server_address": "192.168.0.1",
          "smtp_server_port": 389,
          "smtp_server_authentication_method": "smtp_auth",
        }
      }
    }
  }
}
```

Red:	Setting name
Green:	Setting value

The structure of the “Order Supplies” JSON settings file and the placement of individual setting entries are described in the JSON schema files provided with the Brother Mass Deployment Tool, which is required to send JSON settings files to Brother machines.

The following setting categories are supported:

Category	Description
services_mail	The Services email server settings
contact_info	The details of the recipient of service requests
personal_info	The details of the sender of service requests
privacy_policy	The privacy notice options
order_supplies	The Order Supplies solution’s settings

For a sample JSON file, see Appendix 1.

3.2 Settings

3.2.1 Email settings

Name	Description
smtp_server_address	Specify the SMTP server address. Format: 0.0.0.0
smtp_server_port	Specify the SMTP server port number.
smtp_server_authentication_method	Specify the SMTP server authentication method. Values: "none", "smtp_auth"
smtp_auth_account_name	Specify the SMTP account name.
smtp_auth_account_password	Specify the SMTP account password.
smtp_ssl_tls_method	Specify the SMTP security protocol. Values: "none", "ssl", "tls"
smtp_verify_server_certificate_enabled	Select whether to enable the CA certificate when using SSL or TLS. Values: "true", "false"
device_email_address	Specify the email address used by the target machine to send service requests.

3

3.2.2 Contact information

Name	Description
contact_name	The name of the recipient of service requests (up to 255 alphanumeric characters or symbols).
contact_phone_num	The phone number of the recipient of service requests (up to 20 digits and the following symbols: *, #, -).
contact_email_address	The email address of the recipient of service requests (up to 255 alphanumeric characters or symbols).

3.2.3 Personal information

Name	Description
personal_name	The name of the sender of service requests (up to 255 alphanumeric characters or symbols).
personal_phone_num	The phone number of the sender of service requests (up to 20 digits and the following symbols: *, #, -).
personal_email_address	The email address of the sender of service requests (up to 255 alphanumeric characters or symbols).

3.2.4 Privacy settings

Name	Description
privacy_notice_skip	Specify whether to display the privacy notice before sending a service request. Values: "true", "false",
privacy_policy_url	Specify the privacy notice URL.

3.2.5 “Order Supplies” rules

Name	Description
order_supplies_report_format	Specify the supplies order report format. Values: “plaintext”, “xml”, “csv”
order_supplies_max_order_quantity	Specify the maximum quantity of supplies the user can order (max: 9).
order_supplies_pin_require	Specify whether the user needs to confirm the supplies order with a PIN. Options: “true”, “false”
order_supplies_pin	Specify the PIN required by the user to order supplies (4 digits)

3.3 Deploying the configuration file

Use the Brother Mass Deployment Tool to send your newly created JSON file to the target machine to apply the settings.

1. Run the Brother Mass Deployment Tool.

NOTE

Make sure you know which schema file is supported by your model. For a list of available schema files and applicable models, see the README.TXT file in the “schema” folder. You will need this information later.

2. Check that the machine you want is in the list.
If the machine is not in the list, click the **Add Devices** button.
3. Select the row of the target machine or machines.
4. Click the **Specify Settings File** button. Select the settings file you want to apply, and then click **Open**. The file you selected appears in the Settings File column.
5. If you are applying settings to password-protected machines, enter their passwords in the Device Password column.
6. Select the check box of the machine you want, and then click the **Apply Settings** button to finish. If unsuccessful, click the **Open Log Folder** button and check the log file.

NOTE

For more information, see the *Mass Deployment Tool User’s Guide* at support.brother.com.



4

Usage


4.1 Ordering supplies from the machine's control panel

If your Brother machine's supplies are running low, you can order new supplies by doing the following:


1. On your machine's home screen, press **Services**.
2. Press **Order Supplies**.

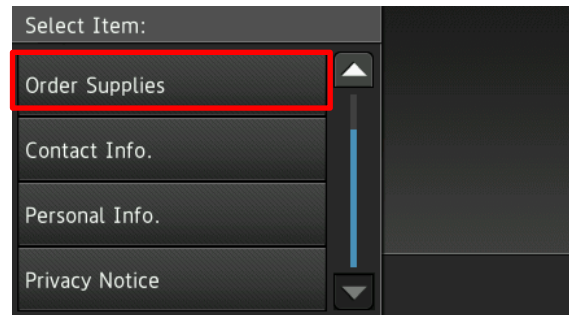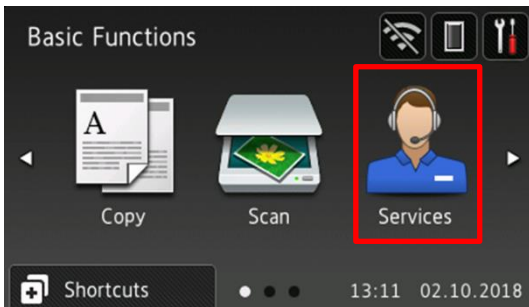


3. Select the required supply items and their quantity.

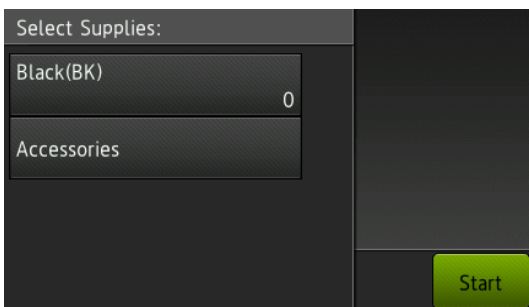

(The supplies and accessories may differ depending on the model.)

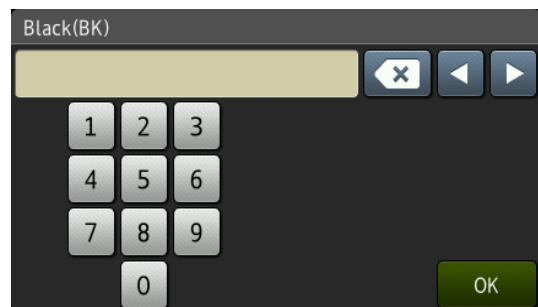


4. Select the required accessories and their quantity.

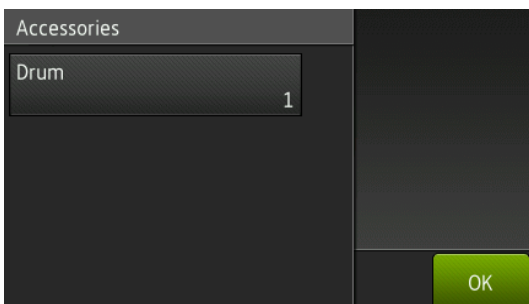


(The supplies and accessories may differ depending on the model.)




5. Press **Start**. If required, enter the PIN provided by your Brother dealer or IT administrator.

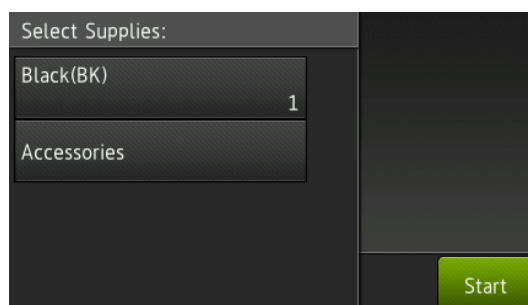

6. Accept the privacy notice and press **OK**.

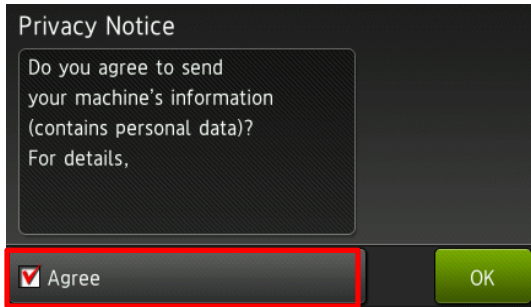

7. Your order has been placed.

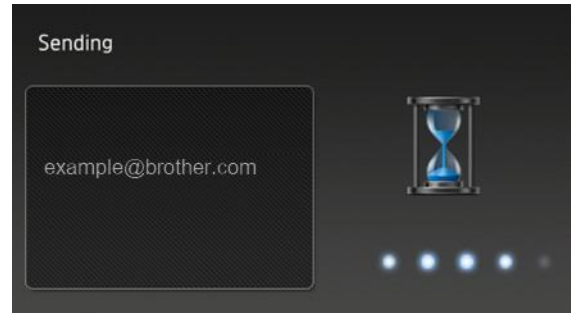

Your Brother dealer or IT administrator will confirm your order and the new supplies will be delivered to you shortly. A copy of your request will also be sent to your personal email address.

4.2 Troubleshooting

Problem	Solution
Authenticate Err. (Authentication Error)	Make sure the email settings are configured correctly.
Sending error	Make sure that the machine is connected to the network and the Contact and Personal email addresses are configured correctly.
I want to display the Privacy Notice again	To view the privacy notice again, go to Home Screen > Services > Privacy Notice. If the user has agreed to the Privacy Notice, the "Agree" button will be greyed out.

Appendix 1 – Sample JSON File

```
{
  "attributes": {
    "software_id": "pns_firmware",
    "setting_version": "",
    "schema_revision": 4
  },
  "settings": {
    "network": {
      "protocol": {
        "mail": {
          "mail_enabled": true
        },
        "services_mail": {
          "smtp_server_address": "192.168.0.1",
          "smtp_server_port": 389,
          "smtp_server_authentication_method": "smtp_auth",
          "smtp_auth_account_name": "account_name",
          "smtp_auth_account_password": "account_password",
          "smtp_ssl_tls_method": "ssl",
          "smtp_verify_server_certificate_enabled": true,
          "device_email_address": "account2@example.com"
        }
      },
      "channel_service": {
        "contact_info": [
          {
            "contact_name": "dealer2",
            "contact_phone_num": "000-000-000-000",
            "contact_email_address": "dealer2@example.com"
          }
        ],
        "personal_info": [
          {
            "personal_name": "custom2",
            "personal_phone_num": "2222-2222-2222-2222",
            "personal_email_address": "custom2@example.com"
          }
        ],
        "privacy_policy": {
          "privacy_notice_skip": true,
          "privacy_policy_url": "http://example2.com"
        },
        "order_supplies": {
          "order_supplies_report_format": "plaintext",
          "order_supplies_max_quantity": 5,
          "order_supplies_pin_require": true,
          "order_supplies_pin": "1111"
        }
      }
    }
  }
}
```

brother
at your side