DCP-T520W / DCP-T720DW DCP-T725DW / DCP-T820DW

Quick Setup Guide

Read the *Product Safety Guide* first, then read this guide for the correct installation procedure. Keep this guide next to your machine for quick reference.

You must follow steps 1 to 7 to complete the setup.

CHN-ENG Version 0



Unpack the machine and check the components

Remove the protective tape and the film covering the machine.




NOTE

- The illustrations in this Quick Setup Guide show the DCP-T720DW.
- Save all packing materials and the box in case you must ship your machine.
- We recommend using a USB 2.0 cable (Type A/B) that is no more than 2 meters long.
- Use a straight-through Category 5 (or greater) twisted-pair cable for 10BASE-T or 100BASE-TX Fast Ethernet Network (not included). (DCP-T820DW)




bottle on both sides.

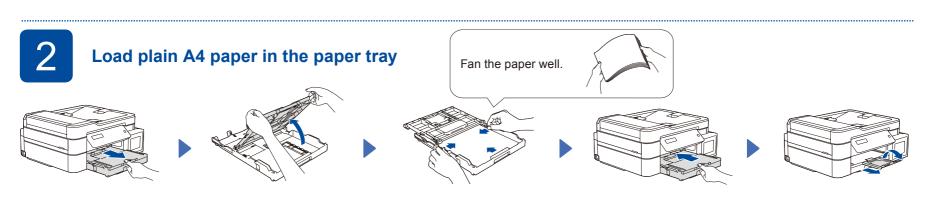

3


Connect the power cord

Connect the power cord. The machine powers on automatically.

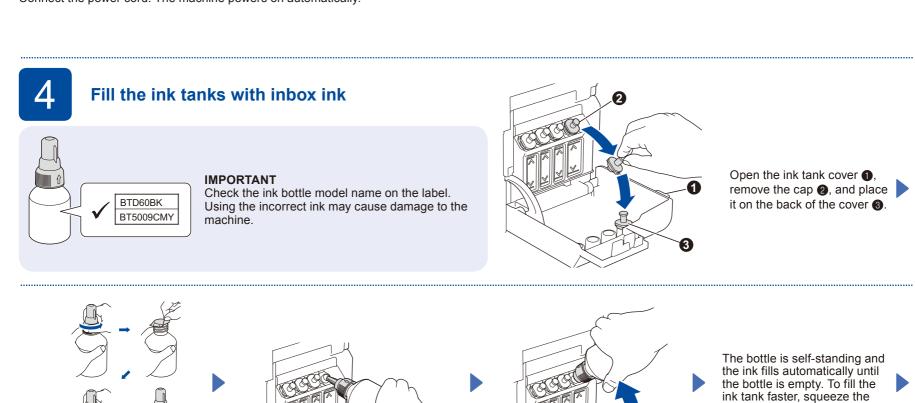


Remove the film and tighten the cap firmly.

Remove the nozzle cap and insert the bottle nozzle firmly into the ink tank so that the ink does not spill.



When finished, remove the bottle, pointing the nozzle upward so the ink does not spill.



Replace the ink tank cap. Repeat step for the other ink tanks, and then close the ink tank cover.



Set the date and time

- 1. Press **OK** to set the date and time.
- 2. Press ▲ or ▼ to select the number, and then press OK to set the date and time.




Machine settings

When the machine has finished the initial cleaning process, follow the steps on the LCD to configure the machine settings.

· Check the print quality

DCP-T820DW:

· Configure the paper tray settings





Connect your computer or mobile device

Install Brother software to use your machine. Visit one of the following websites:

For Computers:



For Windows only, CD installation is also available.

For Mobile Devices:




Install the **Brother iPrint&Scan** application.

Connect your Brother machine and computer/mobile device to the same network.

Follow the on-screen instructions.


For Wired Network Connection* and USB Connection: Use the correct port (based on the cable you are using) inside the machine, as shown.



*DCP-T820DW

Manual wireless setup (if needed)

Find the SSID (Network Name) and Network Key (Password) on your wireless access point/router.



If you cannot find this information, ask your network administrator or wireless access point/router manufacturer.

- 1. Go to your machine and press WiFi.
- 2. Press OK to select [Find
 Network].
 The [WLAN Enable?] message
 appears on the LCD.
- **3.** Press ▲ to select [On].

Select the SSID (Network Name) for your access point/
router and enter the Network Key (Password).

To enter the Network Key, hold down or repeatedly press ▲
or ▼ to select a character from the list below:



When the wireless setup is successful, the LCD displays $[{\tt Connected}].$

兄弟畅享印(WeChat Mini Program)

Your machine can print through an applet of WeChat, which is called "兄弟畅享印"."兄弟畅享印" lets you wirelessly print photos and documents without the need to install an app or a driver.

Binding your printer before using above print function for the first time.

Please scan the QR code on the right for operation instructions.



Reference and Troubleshooting



For detailed machine operation, see the *Online User's Guide*:

www.95105369.com





Control Panel Overview



■ Сору

- 1. Place the document ${\bf face\ down}$ on the scanner glass.
- 2. Press Mono Start or Color Start.

Note: For multiple Copy, press ▲ or ▼ to select the number of Copies.

■ Copy Options

Enlarge or reduce copies, adjust density, ID copy and so on settings, press Enlarge/Reduce or Copy Quality or Copy/Scan Options(ID) in advance.

■ Scan

- 1. Place the document face down on the scanner glass.
- 2. Press SCAN.
- Follow the on-screen instructions, press ▲ or ▼ to select scanning file format and the computer where you send data, and then press OK.
- 4. Press Mono Start or Color Start.

■ Scan Options


There are Scan type, Resolution, File Type, Document Size, Remove background colour and so on settings.

Press $\mathbf{SCAN},$ and then press $\mathbf{Copy}/\mathbf{Scan}$ $\mathbf{Options}(\mathbf{ID})$ for more scan settings.

Machine Settings

The machine's settings are set from the application (Brother iPrint&Scan or Brother Utilities) on your computer or mobile device.

Important Notice for Network Security: The default password to manage this machine's settings is located on the back of the machine and marked "**Pwd**". We recommend immediately changing the default password to protect your machine from unauthorized access. See the *Online User's Guide*.

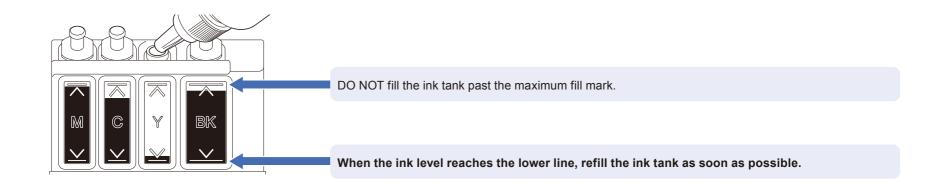

Improve Print Quality

Clean the print head.




Press ▲ or ▼ to select [Maintenance] > [Cleaning] > [Black], [Color] or [All] > [Normal], [Strong] or [Strongest], and then press OK.



Press Mono Start or Color Start.

Remove Jammed Paper

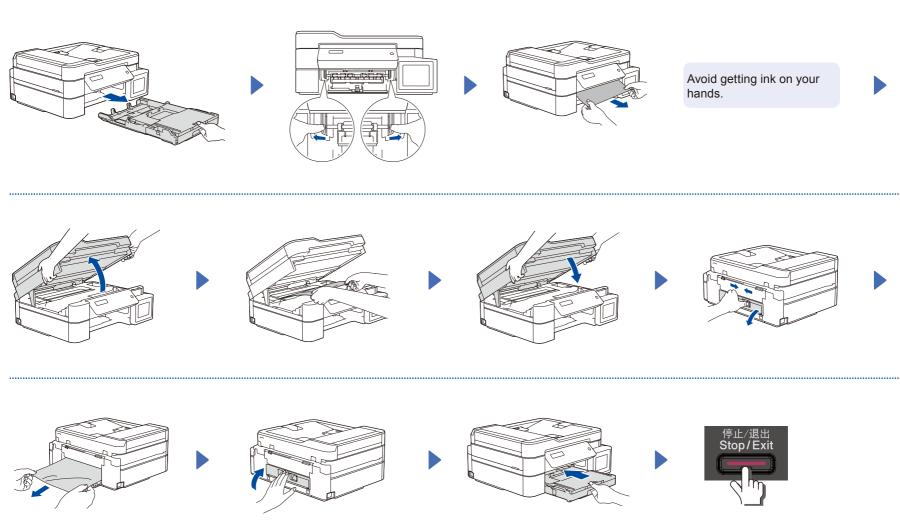

For more information about paper jams, see the Online User's Guide.