

**IMPORTANT:  
READ BEFORE USE.**  
**Vista Installation Instruction  
and  
Update to Quick Reference Guide**

This information applies to the Ver. 7.02 or later.

■ **Windows® Vista users**

Windows® Vista users should perform the installation according to the following information, "Step 1: Installing the Software". In addition, when updating the software, perform the procedure described in "Checking for the Latest Version of the Program" on page 4 of this insert.

■ **Windows® 2000 and XP users**


Windows® 2000 and XP users should perform the installation according to the procedure described in the Quick Reference Guide.

However, the procedure described in "Step 2: Installing the Driver for the Card Writer Module" in the Quick Reference Guide is unnecessary. (The card writer driver will be installed automatically during the procedure described in "Step 1: Installing the Software".)

The following procedure should be performed by a user with Administrator privileges. Otherwise, the administrator password may be requested during the procedure. Type in the password to continue the procedure.

**Step:1  
Installing the Software**

This section describes how to install the application software.

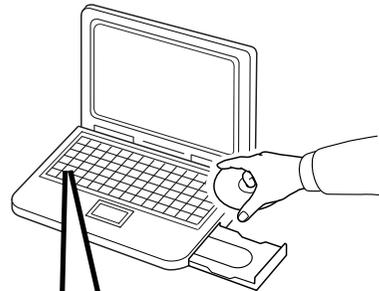

Insert the enclosed CD-ROM into the computer's CD-ROM drive.

**Note:**

- If the installation is interrupted or not performed as described, the software will not be installed correctly.
- Before turning on the computer, be sure to **DISCONNECT** the USB card writer module.

→ After a short while, the **Auto Play** dialog automatically appears.






### Memo:

If the Auto Play Dialog does not automatically start up:

- 1) Click the **Start** button.
- 2) Click **All Programs** -> **Accessories** -> **Run**.
  - ◆ The **Run** dialog box appears.
- 3) Type in the full path to the installer, and then click **OK** to start up the installer.  
For example: *D:\setup.exe* (where "D:" is the name of the CD/DVD drive)

→ The **User Account Control** dialog box appears.

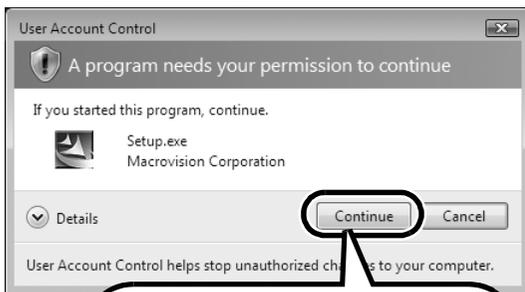

Click **Continue**.

→ After a short while, the **Choose Setup Language** dialog box automatically appears.



Select the **desired language**, and then click **OK**.

→ The InstallShield Wizard starts up, and the first dialog box appears.



Click **Next** to continue with the installation.

→ A dialog box appears, allowing you to select the folder where the software will be installed.



Click **Next** to install the application into the default folder.

 **Memo:**

**To install the application into a different folder:**

- 1) Click **Browse**.
- 2) In the **Choose Folder** dialog box that appeared, select the drive and folder. (If necessary, type in the name of a new folder.)
- 3) Click **OK**.
  - ◆ The **Choose Destination Location** dialog box of the InstallShield Wizard shows the selected folder.
- 4) Click **Next** to install the application into the selected folder.
  - To return to the previous step, click **Back**.
  - To quit the installation, click **Cancel**.

→ When the installation is completed, the following dialog box appears.

**InstallShield Wizard Complete**



Click **Finish** to complete the installation of the software.

 **Note:**

With this procedure, the card writer driver is also installed automatically. At this point the cardwriter may now be connected to your computer. Check to make sure each application starts up correctly.

 **Memo:**

If the following dialog box appears, it is necessary to restart the computer.

**InstallShield Wizard Complete**

Yes, I want to restart my computer now.



Click **Finish** to restart the computer and complete the installation of the software.

## Checking for the Latest Version of the Program

The software is checked to determine whether or not it is the latest version.


\*For details on “Check for Updates”, refer to the Quick Reference Guide.

### ■ PRE-OPERATION


Follow the procedure described below to start up Layout & Editing.

From the **Start** button, continue with the necessary steps to select **Layout & Editing**.

Right-click **Layout & Editing** in the menu to display the following pop-up menu, and then click **Run as administrator**.

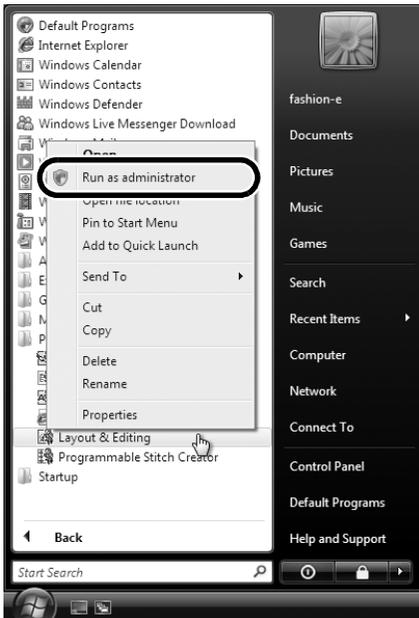


When the **User Account Control** dialog box appears, click **Allow**.

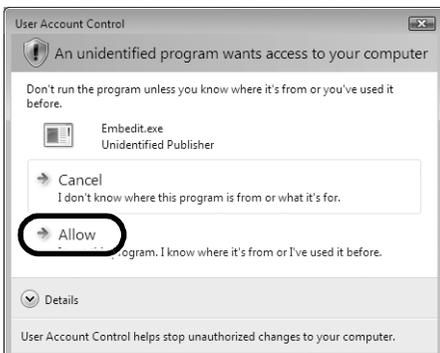


### ■ CHECK FOR UPDATES

Click **Help** in Layout & Editing, and then click **Check for updates**.

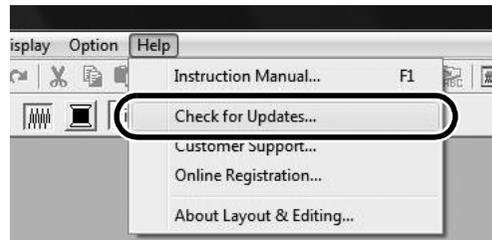

If the message shown below appears, the latest version of the software is not being used. Click **Yes**, and then download the latest version of the software from the Web site.

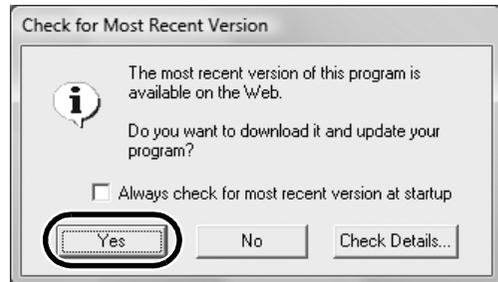

### ■ POST-OPERATION

After downloading is finished, exit Layout & Editing (and all Ver. 7 applications).

Then, start Layout & Editing again by right-clicking **Layout & Editing** in the menu, then clicking **Run as administrator** as described under “PRE-OPERATION” in the left column.

This completes the update procedure.