

# **Software Developer's Manual**

## **DPL Emulation Guide**

**TD-4420TN/4520TN**

**TD-4650TNWB/4650TNWBR/4750TNWB/4750TNWBR**

**TJ-4005DN/4010TN**

**TJ-4020TN/4021TN/4021TNR/4120TN/4121TN/4121TNR**

**TJ-4420TN/4520TN/4620TN/4422TN/4522TN**

**Version 5.00**

## Copyright

©2020 Brother Industries, Ltd. All rights reserved.

Information in this document is subject to change without notice. The software described in this document is furnished under a license agreement. The software may be used or copied only in accordance with the terms of those agreements. No part of this publication can be reproduced in any form or by any means without prior written permission of Brother Industries, Ltd.

## Trademarks

Any trade names and product names of companies appearing on Brother products, related documents and any other materials are all trademarks or registered trademarks of those respective companies.

## Important Note

This document provides information for the label printer (See [Appendix A: Supported Printers](#)) and is available for use only if you agree to the following conditions:

### No Warranty

- a. The contents of this document are subject to change without notice.
- b. Regarding this document, Brother will not guarantee that there are no defects or if the purpose matches the specific purpose, regardless of whether it is explicit or implied.
- c. Brother assumes no responsibility for damages, actions of third parties, the user's intentional or negligent operation, misuse, or operation under other special conditions.

Table of Contents

<b>1. Introduction.....</b>	<b>2</b>
<b>2. Printer Settings.....</b>	<b>3</b>
<b>3. DPL Emulation Support Commands .....</b>	<b>4</b>
<b>Appendix A: Supported Printers.....</b>	<b>8</b>
<b>Appendix B: Font Specification.....</b>	<b>9</b>
<b>Appendix C: Supported Barcodes .....</b>	<b>10</b>


## 1. Introduction

DPL emulation allows TD-4T and TJ Printers to interpret DPL commands. To use this feature, change the printer settings as described in [Section 2](#).


## 2. Printer Settings

The TD-4T and TJ Printers have built-in paper settings that are necessary to perform printing operations (position detection). The settings are saved in the device's flash memory so they are retained even if the power is turned off. Before using the DPL emulation, printer settings (such as the paper size and type) must be set using the Brother Printer Management Tool (BPM):

- a. Start the BPM.
- b. Click the **Printer Function**.
- c. Select the calibration sensor, and click the **Calibrate**.



- d. Click the **Printer Configuration**.
- e. Select the **FBPL** tab.
- f. Set the print operations you want.
- g. Check if the paper size settings for each printer language is correct.
- h. Click **Set**.

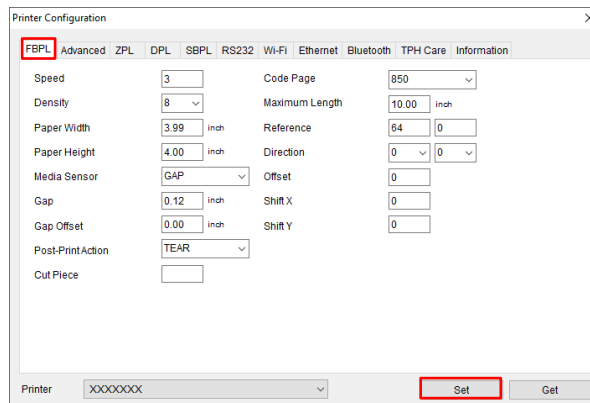

The paper size and type can be set using the FBPL paper setting command (refer to *FBPL Command Reference*).

For more information, see the *User's Guide* on your model's Manuals page at [support.brother.com](http://support.brother.com).

### 3. DPL Emulation Support Commands

Classification	Command	Comment
Immediate Command	<SOH>#	Reset
	<SOH>*	Reset
	<SOH>A	Send ASCII Status String
	<SOH>a	Send ASCII Extended Status String
	<SOH>B	Toggle Pause
	<SOH>D	SOH Shutdown
	<SOH>E	Send Batch Quantity
	<SOH>F	Send Status Byte
	<SOH>U	Update System Database with Current Database
System-Level Command	<STX>A	Set Time and Date
	<STX>a	Enable Feedback Characters
	<STX>B	Get Printer Time and Date Information
	<STX>c	Set Continuous Paper Length
	<STX>d	Set Double Buffer Mode
	<STX>E	Set Quantity for Stored Label
	<STX>e	Select Edge Sensor
	<STX>F	Form Feed
	<STX>f	Set Form Stop Position (Backfeed Command)
	<STX>G	Print Last Label Format
	<STX>I	Input Image Data
	<STX>i	Scalable Font Downloading
	<STX>J	Set Pause for Each Label
	<STX>K	Extended-System Commands
	<STX>k	Test RS-232 Port
<STX>L	Enter Label Formatting Command Mode	

Classification	Command	Comment
	<STX>M	Set Maximum Label Length
	<STX>m	Set Printer to Metric Mode
	<STX>n	Set Printer to Imperial Mode
	<STX>O	Set Start of Print (SOP) Position
	<STX>o	Cycle Cutter
	<STX>P	Set Printer to Character (HEX) Dump Mode
	<STX>p	Controlled Pause
	<STX>Q	Clear All Modules
	<STX>q	Clear Module
	<STX>R	Ribbon Saver On/Off
	<STX>r	Select Reflective Sensor
	<STX>S	Set Feed Rate
	<STX>s	Set Single Buffer Mode
	<STX>t	Test DRAM Memory Module
	<STX>U	Label Format String Replacement Field
	<STX>V	Software Switch Settings
	<STX>v	Request Firmware Version
	<STX>X	Set Default Module
	<STX>x	Delete File from Module
	<STX>y	Select Font Symbol Set
Extended System-Level Command	<STX>Kb	Backfeed Time Delay
	<STX>Kc	Configuration Set
	<STX>Kd	Database Configuration
	<STX>Ke	Character Encoding
	<STX>Kf	Select Factory Defaults
	<STX>Kf	Set Present Distance
	<STX>Km	Memory Configuration, Internal Module (Non-Display)

Classification	Command	Comment
		Models only)
	<STX>KS	Memory Configuration, Scalable Font Cache
	<STX>KV	Verifier Enable/Disable
	<STX>KW	Memory Configuration, Printable Label Width
	<STX>Kx	Delete Configuration File
	<STX>KZ	Immediately Set Parameter
Label Formatting Command	:	Set Cut By Amount
	A	Set Format Attribute
	B	Bar Code Magnification
	C	Set Column Offset Amount
	c	Set Cut By Amount
	D	Set Dot Size Width and Height
	E	Terminate Label Formatting Mode and Print Label
	F	Advanced Format Attributes
	f	Set Present Speed
	G	Place Data in Global Register
	H	Enter Heat Setting
	J	Justification
	M	Select Mirror Mode
	m	Set Metric Mode
	n	Set Inch (Imperial) Mode
	P	Set Print Speed
	p	Set Backfeed Speed
	Q	Set Quantity of Labels to Print
	R	Set Row Offset Amount
	r	Recall Stored Label Format
S	Set Slew Speed	



Classification	Command	Comment
	s	Store Label Format in Module
	T	Set Field Data Line Terminator
	X	Terminate Label Formatting Mode
	y	Select Font Symbol Set
	z	Zero (Ø) Conversion to "0"
	+ (>) ( ( ) )	"Make Last Field Entered Increment Numeric (Alphanumeric)(Hexadecimal)"
	- (<) ( ( ) )	"Make Last Field Entered Decrement Numeric (Alphanumeric)(Hexadecimal)"
	+ (>)	Make Last Field Entered Increment Numeric (Alphanumeric)
	- (<)	Make Last Field Entered Decrement Numeric (Alphanumeric)
	^	Set Count by Amount

## Appendix A: Supported Printers

<p>TD-4T series</p>	<p>TD-4420TN            TD-4520TN            TD-4650TNWB            TD-4650TNWBR            TD-4750TNWB            TD-4750TNWBR</p>
<p>TJ series</p>	<p>TJ-4005DN            TJ-4010TN            TJ-4020TN            TJ-4021TN            TJ-4021TNR            TJ-4120TN            TJ-4121TN            TJ-4121TNR            TJ-4420TN            TJ-4520TN            TJ-4620TN            TJ-4422TN            TJ-4522TN</p>

## Appendix B: Font Specification

The font specifications compatible with TD-4T and TJ Printer DPL Emulation are as follows:

Built-in Font	Fixed Font	0DMX.BMF 1DMX.BMF 2DMX.BMF 3DMX.BMF 4DMX.BMF 5DMX.BMF 6DMX.BMF 7DMX.BMF 8DMX.BMF
	Scalable Font	00DMX.TTF 01DMX.TTF A0DMX.TTF A1DMX.TTF A2DMX.TTF A3DMX.TTF
Downloadable Font	Compatible	

## Appendix C: Supported Barcodes

Barcode ID	Type
A / a	Code 3 of 9
B / b	UPC-A
C / c	UPC-E
D / d	Interleaved 2 of 5 (12 of 5)
E / e	Code 128
F / f	EAN-13
G / g	EAN-8
H / h	HBIC
I / i	Codabar
J / j	Interleaved 2 of 5 with a modulo 10 checksum
K / k	Plessey
L / l	Interleaved 2 of 5 with a modulo 10 checksum & shipping bearer bars
M / m	2 digit UPC addendum
N / n	5 digit UPC addendum
O / o	Code 93
p	Postnet
Q / q	UCC/EAN Code 128
R / r	UCC/EAN Code 128 K-Mart NON EDI barcode
S / s	UCC/EAN Code 128 Random Weight
T / t	Telepen
U	UPS MaxiCode
u	UPS MaxiCode with Byte Count
v	FIM
z	PDF417
Z	PDF417 with Byte Count
w1c	DataMatrix
w1C	DataMatrix with Byte Count
w1d	QR Code – Auto format
w1D	QR Code – Manual format
w1f	Aztec
w1F	Aztec with Byte Count
w1I	EAN 128 with auto subset switching
w1J	Code 128 with auto subset switching

**brother**