Important Security Information

Web Based Management is a utility that allows you to manage your printer directly from your web browser via Hyper Text Transfer Protocol (HTTP). With Web Based Management, you can view and change the printer's information and settings. HTTP communication must be enabled on the printer to use this feature.

To enable HTTP communication, select one of the following options:

Disable Printer Security

Enable Printer Security

Disable Printer Security

This option opens all standard network ports.


1. Go to your model's **Downloads** page at support brother.com and download the Brother Printer Management Tool.

   Note:
   Make sure to use the Brother Printer Management Tool version 1.0.0.68 or later.

2. Connect the printer to your computer using a USB cable.

3. Double-click the Brother Printer Management Tool icon to run the tool.


   The Brother Printer Management Tool screen appears.

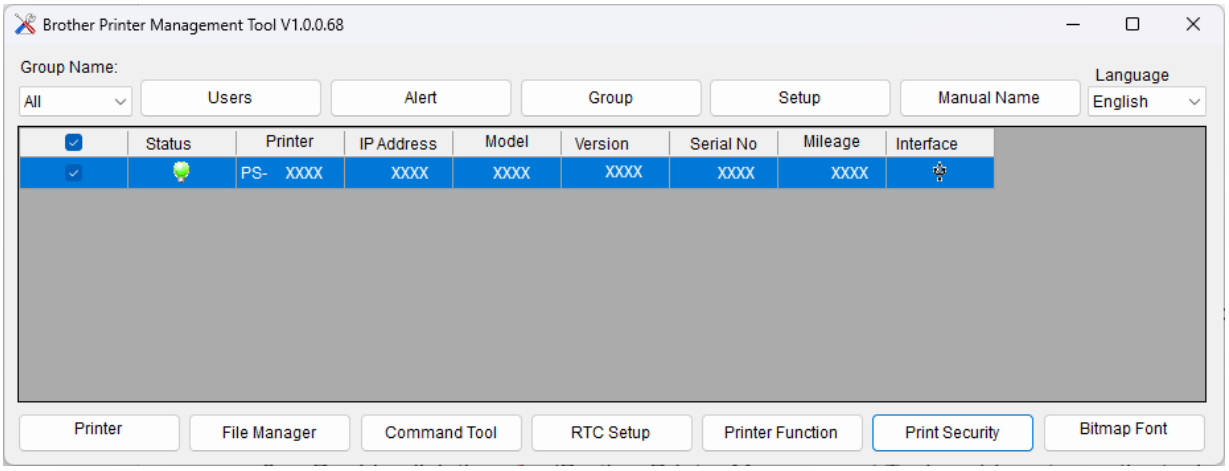

4. Select the printer you want to use.

5. Click the **Print Security** button.

6. Select the **Standard** option from the **Security Mode** drop-down list.

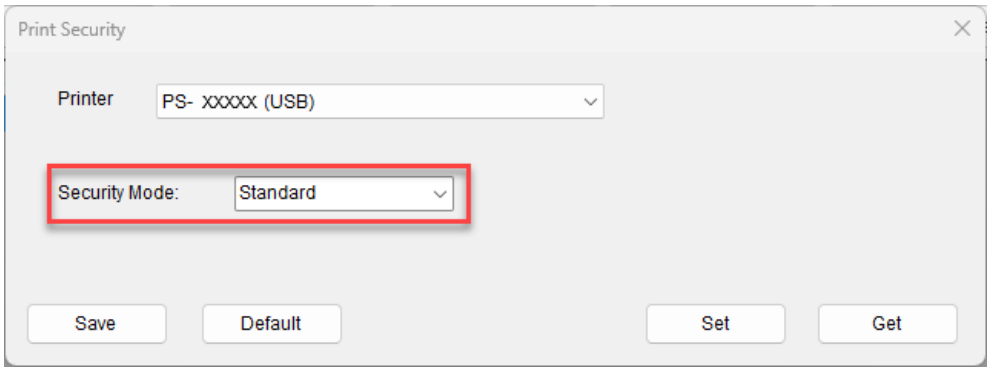

Important:
The **Standard** option reduces print security by enabling protocols such as HTTP, SNMP, and FTP. To keep these protocols disabled, select the **Strict** option.

7. Click **Set**, and then click **Save**.
8. Click the **x** in the top right corner to close the window.
9. Go to Access Web Based Management and Set Up a User Name and Password.


Enable Printer Security

This option restricts access by opening only the HTTP port and closing all other standard network ports.

1. Go to your model's **Downloads** page at support brother.com and download the Brother Printer Management Tool.


   Note:
   Make sure to use Brother Printer Management Tool version 1.0.0.68 or later.
2. Connect the printer to your computer using a USB cable.
3. Double-click the Brother Printer Management Tool icon to run the tool.

   The Brother Printer Management Tool screen appears.

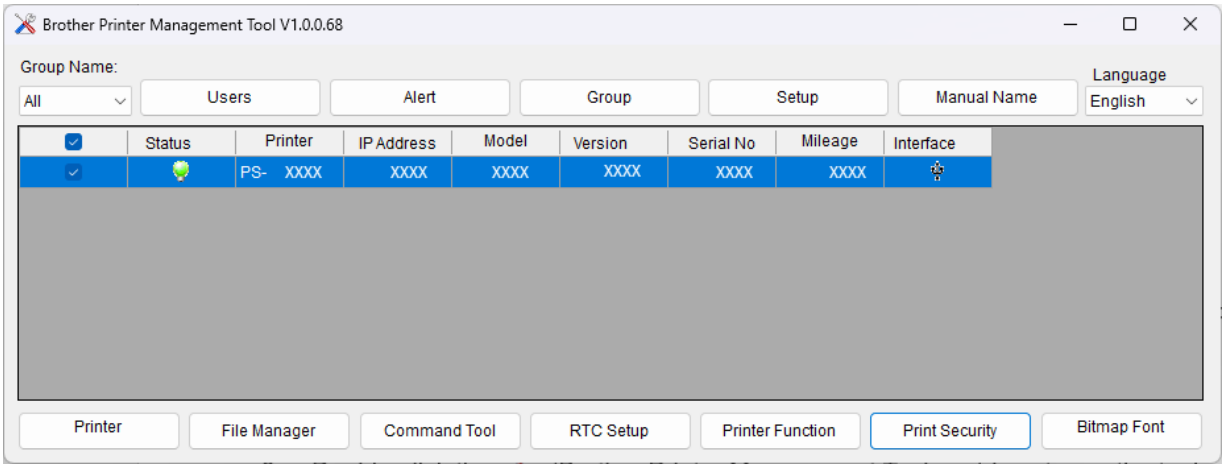

4. Select the printer you want to use.

5. Click the **Command Tool** button. The editor window appears.

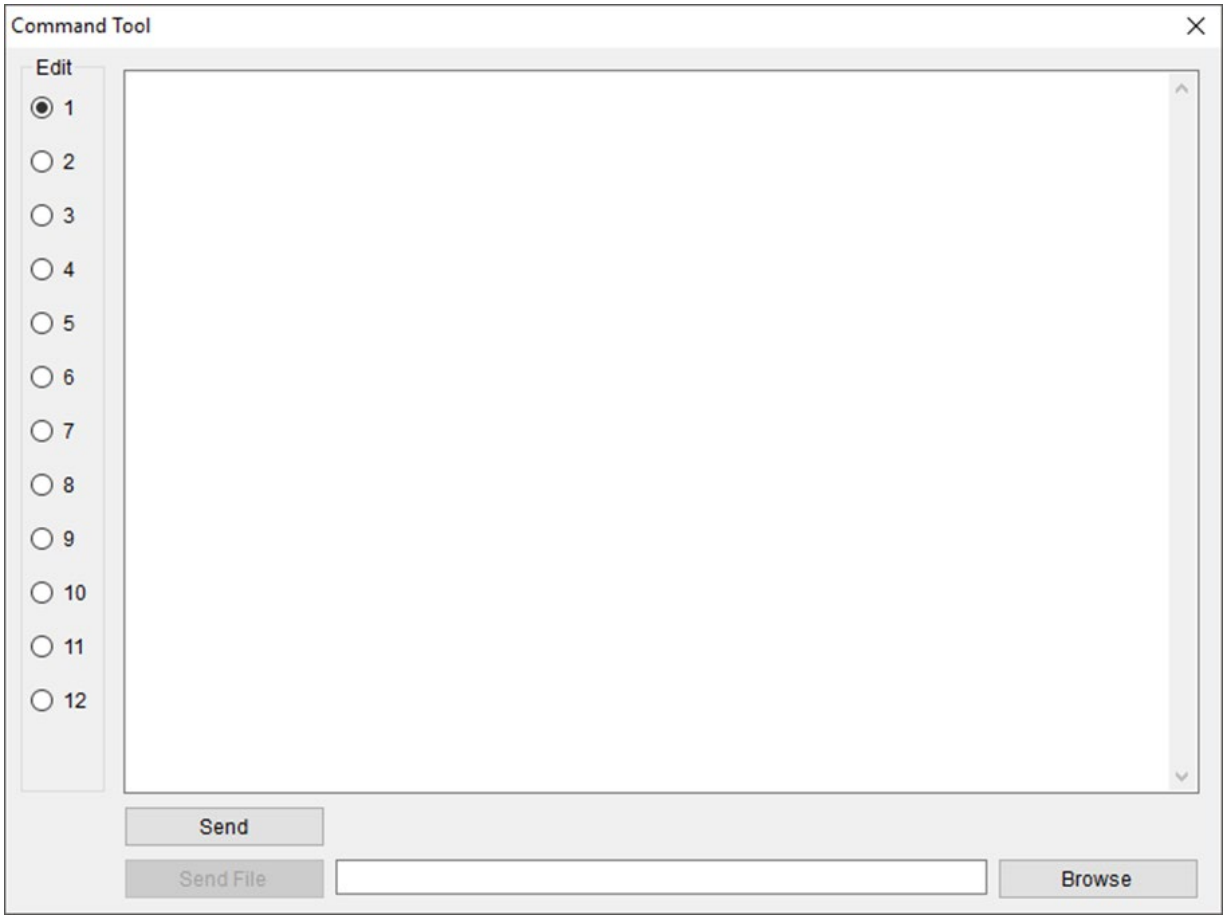

6. In the editor window, copy the commands below, and then press **Enter** to add a line break to the final line.

```
!PTR_SETUP
UPMC
{
"Command":"PRINTSECURITY.Set",
"Content":{
"Enable-b":true,
"ServerHTTP-b":true,
}
}
PTR_END

!PTR_SETUP
UPMC
{
"Command":"PRINTSECURITY.Save",
}
PTR_END
```

7. Click **Send**.

   Note:
   You can also send commands to the printer by saving them to a text file. Click **Browse** to select the command file, and then click **Send File**.

8. Restart the printer.

9. Go to Access Web Based Management and Set Up a User Name and Password.

Access Web Based Management and Set Up a User Name and Password

1. Start your browser.

2. Type “http://printer’s IP address” in your browser’s address bar (where “printer’s IP address” is your printer’s IP address).
   For example:
   http://192.168.1.2
   The **Welcome to first time use** screen appears.

3. Enter user and administrator login details.



4. Click **Set**.

   You can now use Web Based Management.

Supported Products and Firmware Information

Product Name	Firmware Version
TD-4420TN/4520TN	V1.04.S141 or later
TD-4650TNWB/4750TNWB/4650TNWBR/4750TNWBR	V1.04.S141 or later
TJ-4005DN/4010TN	B2.12.S151 or later
TJ-4020TN/4021TN/4021TNR/4120TN/4121TN/4121TNR	B2.12.S151 or later
TJ-4420TN/4520TN/4620TN/4422TN/4522TN	B1.17.S130 or later
TJ-6421TN/6521TN	B0.99.025 or later

Contact your dealer for firmware.